NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

Single side
ENT401 Full Height Turnstile



- Full Height Turnstile developed is available for any area which needs a high level of security without persons to monitor.
- The machine is well designed to be rustproof, durable and able to resist external destroy.
- Full Height Turnstile is normally designed to be Semi-Automatic Type, but we can also provide Full Automatic Type and Manual Type for customization.
- Full Height Turnstile with 3-arm obstacle: the center rotor rotates 120 degrees per time, and it offers a comfortable space for users.
- Full Height Turnstile with 4-arm obstacle: the center rotor rotates 90 degrees per time, and it offers a higher level of security but less space for users.

- Fully Automatic Type:
  The center rotor will be set free (default) or locked (optional) automatically when the power is off.
  Automatic-rotation function: once an open signal is given, the center rotor will rotate automatically.
- Semi-Automatic Type:
  The center rotor will be set free (default) or locked (optional) automatically when the power is off.
  The structure has no motor.
- Manual Type:
  The center rotor can only rotate by single direction, but the direction can be changed easily inside.
  The structure has no electric devices.




Features & Function:

• Both directions can be set as controlled mode or free mode.
• Self-examine on breakdown, ease of use and maintenance.
• Self-recovery function: The machine wills recovery automatically with invalid counting if passage is not completed within pre-set time (5 seconds default, adjustable by software).
• With interface of relay switch (the dry contact signal or +12V electrical level signal or DC12V pulse signal of pulse width ≥ 100ms, driving current ≥ 10mA), compatible with all kinds of access controllers.

Customized Features:

• Alternative Materials, Finishes and Custom Design
• Access control System Integration
• Ticket System Integration
• Camera System Integration
• Thermostat System Integration
• Remote-Controlled Button
• Usage Counters
• Waterproof and Dustproof Design: IP65

Configuration:

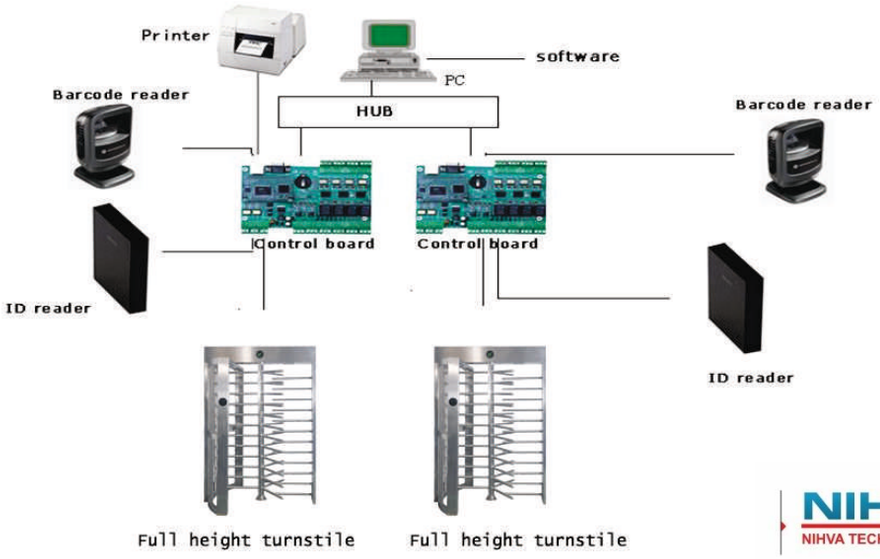

Optional Accessories:



Access Controller | Card Reader | Card Register | Power Supply | Card

Specifications:

Framework:	304/316 stainless steel
Thickness of Ply:	1.2mm
Dimensions:	(L)1630 X (W)1500 X (H)2310 (mm)
Finishing:	Brushed
Pass width:	500-700mm
Weight:	220Kg
Operation direction:	Single direction / Bi-direction
Power Voltage:	AC220V +/- 10% 50-60 Hz
Work Environment:	Indoor / Outdoor
Pass rate:	35 person / min
Driving Voltage:	DC24V
Operating Temp.:	-20℃ ~ 60℃
Operating Humidity:	0 ~ 95% (No freeze)
Input:	12V Dry contact

Applications:

Prison
Factory
Government
Nuclear power plants
Bank

Dimension:

