CLIENT	**:**	**NEOTRAFO SOLUTIONS INDIA PRIVATE LIMITED**
SITE	**:**	**HYDERABAD**
LOCATION	**:**	**HYDERABAD, INDIA**
NO.	**:**	**-**
DOCUMENT NO.	**:**	**DBR-R00**

R00	10.09.2026	Design report	R.S.R	H.A.B	H.A.B
Rev No.	**Date**	**Description**	**Prepared By**	**Checked By**	**Approved By**

SALT Design Services

TABLE OF CONTENTS

Sr. No	Contents	Page No.
1	Design Philosophy	3
2	Design Codes and Standards	3
3	Material Specifications Construction	4
4	Load Calculations	4
4.1	Dead Load	4
4.2	Live Load	5
5	Primary Loads and Load Combinations	5
6	Deflection Check	5
	STAAD output	9

1. Design Philosophy

This report presents the structural design of Roof frame of the VM-HM unit for Neotrafo at Hyderabad, India. The structure has been designed to safely resist the applicable dead loads (DL) and live loads (LL). The overall dimensions of the roof frame are **5.212 m × 6.204 m**. The main sliding roof frame is of Aluminium 6063-T6 material. Wind load has not been considered in the design, as the structure is fully enclosed by the existing shade

The complete frame is modelled as 3D frame and analysed/designed for worst combination of loads through STAAD.pro. Input and output files are enclosed which are self-explanatory. From the STAAD output.

2. DESIGN CODES AND STANDARDS

Code / Standard	Applicability	Remark
IS800-2007	Design of steel structures	--
IS 875-Part I	For dead load calculation	--


3. MATERIAL SPECIFICATION FOR CONSTRUCTION

Sr.no	Material	Specification	Minimum Strength
1	Aluminium	Aluminium 6063-T6	Fy = 214 N/mm^2


4. LOAD CALCULATIONS

4.1 DEAD LOAD

1.SELFWEIGHT FACTOR = 1.1

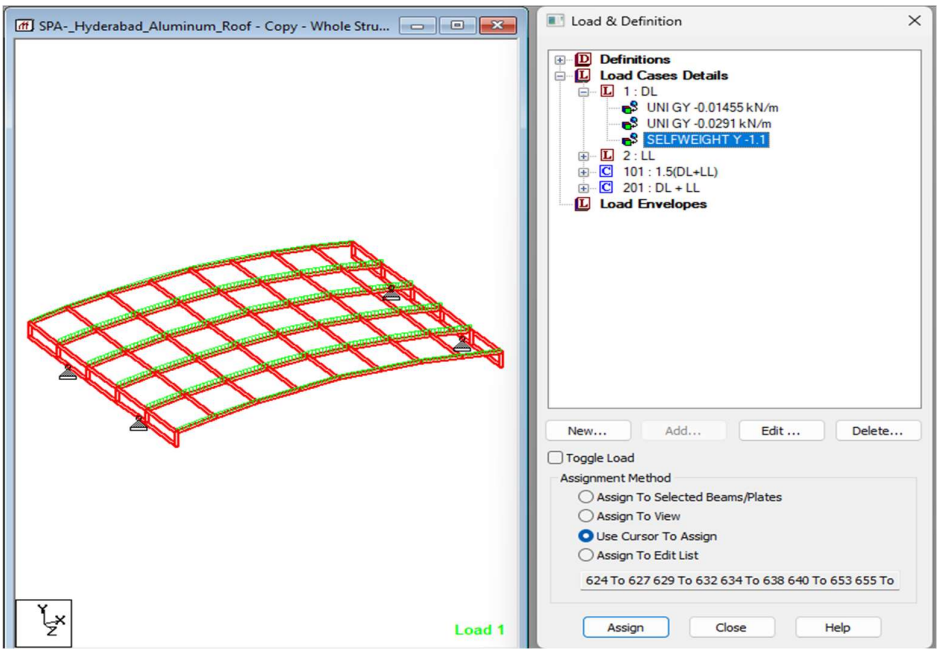


2. Dead load for 16mm thk. glass sheet assumed = 3 Kg/m^2 i.e. 0.030*0.970 = 0. 0291 kN/m

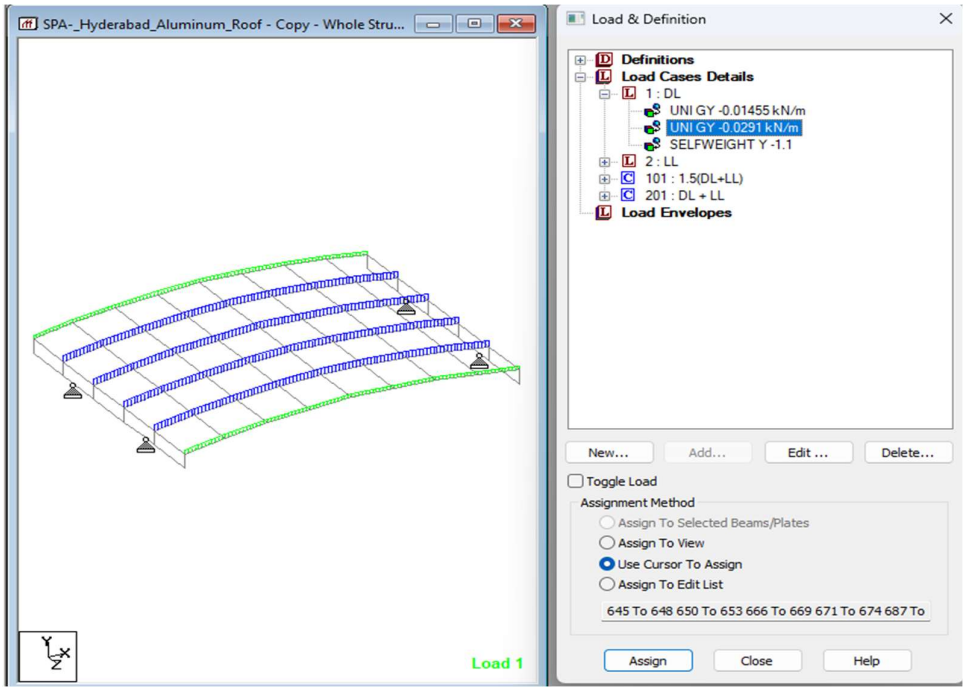

4.2 LIVE LOAD

1.Live load assumed = 100 kg (1 person) = 1kN/6.142

= 0.1628 kN/m.

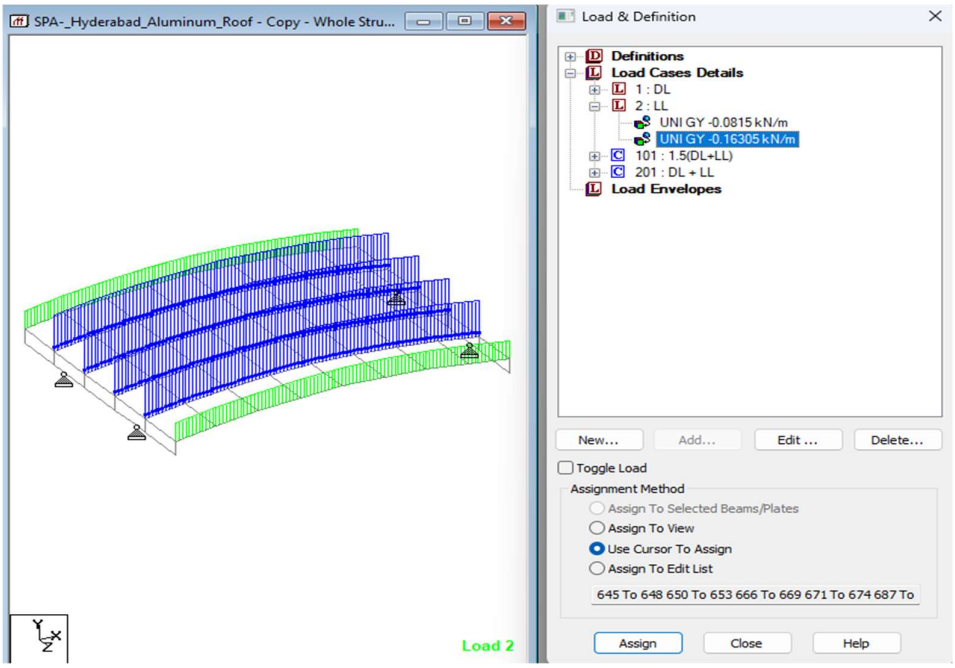

5. PRIMARY LOADS & LOAD COMBINATIONS

5.1 PRIMARY LOADS

Load 1 Dead Load (DL)

Load 2 Live Load (LL)

5.2 LOAD COMBINATIONS

Load Combination for strength: -

1.5 DL + 1.5 LL

Load Combination for serviceability: -

DL + LL

6. Deflection checks at roof top in Y direction

Refer node no. –302 of Staad file for load combination 201

Max. Deflection in Y dir. = 22.971 mm < L/250 = (IS 800-2007 table 6)

.... Hence ok.

STAAD OUTPUT

```
**************************************************
*                                                *
*          STAAD.Pro 2023                        *
*          Version  23.00.03.25                  *
*          Proprietary Program of                *
*          Bentley Systems, Inc.                 *
*          Date=    SEP 10, 2026                 *
*          Time=    12:20:39                     *
*                                                *

**************************************************


     1. STAAD SPACE
INPUT FILE: E:\2041\NEOTRAFO\STAAD\ROOF\VM-HM-_Hyderabad_Aluminum_Roof - FINAL -.STD
     2. START JOB INFORMATION
     3. ENGINEER DATE 16-DEC-22
     4. END JOB INFORMATION
     5. INPUT WIDTH 79
     6. UNIT METER KN
     7. JOINT COORDINATES
     8. 242 0 3.10059E-05 125; 243 4.96095E-05 0.297251 125; 244 0.738065 0.42068 125
     9. 245 1.51408 0.516525 125; 246 2.29007 0.573328 125; 247 3.06609 0.604582 125
    10. 248 6.14213 3.10059E-05 125; 249 6.14213 0.297251 125; 250 5.39409 0.42068 125
    11. 251 4.61807 0.516525 125; 252 3.84208 0.573328 125; 253 0 3.10059E-05 126.042
    12. 254 4.96095E-05 0.297251 126.042; 255 0.738065 0.42068 126.042
    13. 256 1.51408 0.516525 126.042; 257 2.29007 0.573328 126.042
    14. 258 3.06609 0.604582 126.042; 259 6.14213 3.10059E-05 126.042
    15. 260 6.14213 0.297251 126.042; 261 5.39409 0.42068 126.042
    16. 262 4.61807 0.516525 126.042; 263 3.84208 0.573328 126.042
    17. 264 0 3.10059E-05 127.084; 265 4.96095E-05 0.297251 127.084
    18. 266 0.738065 0.42068 127.084; 267 1.51408 0.516525 127.084
    19. 268 2.29007 0.573328 127.084; 269 3.06609 0.604582 127.084
    20. 270 6.14213 3.10059E-05 127.084; 271 6.14213 0.297251 127.084
    21. 272 5.39409 0.42068 127.084; 273 4.61807 0.516525 127.084
    22. 274 3.84208 0.573328 127.084; 275 0 3.10059E-05 128.126
    23. 276 4.96095E-05 0.297251 128.126; 277 0.738065 0.42068 128.126
    24. 278 1.51408 0.516525 128.126; 279 2.29007 0.573328 128.126
    25. 280 3.06609 0.604582 128.126; 281 6.14213 3.10059E-05 128.126
    26. 282 6.14213 0.297251 128.126; 283 5.39409 0.42068 128.126
    27. 284 4.61807 0.516525 128.126; 285 3.84208 0.573328 128.126
    28. 286 0 3.10059E-05 129.168; 287 4.96095E-05 0.297251 129.168
    29. 288 0.738065 0.42068 129.168; 289 1.51408 0.516525 129.168
    30. 290 2.29007 0.573328 129.168; 291 3.06609 0.604582 129.168
    31. 292 6.14213 3.10059E-05 129.168; 293 6.14213 0.297251 129.168
    32. 294 5.39409 0.42068 129.168; 295 4.61807 0.516525 129.168
    33. 296 3.84208 0.573328 129.168; 297 0 3.10059E-05 130.21
    34. 298 4.96095E-05 0.297251 130.21; 299 0.738065 0.42068 130.21
    35. 300 1.51408 0.516525 130.21; 301 2.29007 0.573328 130.21
    36. 302 3.06609 0.604582 130.21; 303 6.14213 3.10059E-05 130.21
    37. 304 6.14213 0.297251 130.21; 305 5.39409 0.42068 130.21
    38. 306 4.61807 0.516525 130.21; 307 3.84208 0.573328 130.21
```

```
39. 314 0 3.10059E-05 126.342; 315 6.14213 3.10059E-05 126.342
40. 316 0 3.10059E-05 128.796; 317 6.14213 3.10059E-05 128.796
41. MEMBER INCIDENCES
42. 624 243 244; 625 244 245; 626 245 246; 627 246 247; 629 249 250; 630 250 251
43. 631 251 252; 632 252 247; 634 243 254; 635 244 255; 636 245 256; 637 246 257
44. 638 247 258; 640 249 260; 641 250 261; 642 251 262; 643 252 263; 644 253 254
45. 645 254 255; 646 255 256; 647 256 257; 648 257 258; 649 259 260; 650 260 261
46. 651 261 262; 652 262 263; 653 263 258; 655 254 265; 656 255 266; 657 256 267
47. 658 257 268; 659 258 269; 661 260 271; 662 261 272; 663 262 273; 664 263 274
48. 665 264 265; 666 265 266; 667 266 267; 668 267 268; 669 268 269; 670 270 271
49. 671 271 272; 672 272 273; 673 273 274; 674 274 269; 676 265 276; 677 266 277
50. 678 267 278; 679 268 279; 680 269 280; 682 271 282; 683 272 283; 684 273 284
51. 685 274 285; 686 275 276; 687 276 277; 688 277 278; 689 278 279; 690 279 280
52. 691 281 282; 692 282 283; 693 283 284; 694 284 285; 695 285 280; 697 276 287
53. 698 277 288; 699 278 289; 700 279 290; 701 280 291; 703 282 293; 704 283 294
54. 705 284 295; 706 285 296; 707 286 287; 708 287 288; 709 288 289; 710 289 290
55. 711 290 291; 713 293 294; 714 294 295; 715 295 296; 716 296 291; 718 287 298
56. 719 288 299; 720 289 300; 721 290 301; 722 291 302; 724 293 304; 725 294 305
57. 726 295 306; 727 296 307; 728 297 298; 729 298 299; 730 299 300; 731 300 301
58. 732 301 302; 733 303 304; 734 304 305; 735 305 306; 736 306 307; 737 307 302
59. 738 242 253; 739 248 259; 740 286 297; 741 275 316; 742 264 275; 743 253 314
60. 744 292 303; 745 281 317; 746 270 281; 747 259 315; 778 314 264; 779 315 270
61. 780 316 286; 781 317 292; 996 242 243; 997 248 249; 998 292 293
62. START GROUP DEFINITION
63. GEOMETRY
64. FLOOR
65. _LL 624 TO 627 629 TO 632 634 TO 638 640 TO 643 645 TO 648 650 TO 653 655 -
66. 656 TO 659 661 TO 664 666 TO 669 671 TO 674 676 TO 680 682 TO 685 687 TO 690 -
67. 692 TO 695 697 TO 701 703 TO 706 708 TO 711 713 TO 716 718 TO 722 -
68. 724 TO 727 729 TO 732 734 TO 737
69. END GROUP DEFINITION
70. SUPPORTS
71. 314 TO 317 PINNED
72. DEFINE MATERIAL START
73. ISOTROPIC ALUMINUM
74. E 6.89473E+07
75. POISSON 0.33
76. DENSITY 26.6017
77. ALPHA 1.28E-05
78. DAMP 0.03
79. ISOTROPIC STEEL
80. E 1.99947E+08
81. POISSON 0.3
82. DENSITY 76.8191
83. ALPHA 6.5E-06
84. DAMP 0.03
85. TYPE STEEL
86. STRENGTH RY 1.5 RT 1.2
87. END DEFINE MATERIAL
88. CONSTANTS
89. MATERIAL ALUMINUM MEMB 624 TO 627 629 TO 632 644 TO 653 665 TO 674 -
90. 686 TO 695 707 TO 711 713 TO 716 728 TO 747 778 TO 781 996 TO 998
91. MATERIAL STEEL MEMB 634 TO 638 640 TO 643 655 TO 659 661 TO 664 676 TO 680 -
92. 682 TO 685 697 TO 701 703 TO 706 718 TO 722 724 TO 727
93. MEMBER PROPERTY APLAPOLLOTUBES
94. 624 TO 627 629 TO 632 644 TO 653 665 TO 674 686 TO 695 707 TO 711 713 TO 716 -
```

```
 95. 728 TO 737 996 TO 998 TABLE ST 60X60X2.9SHS
 96. MEMBER PROPERTY APLAPOLLOTUBES
 97. 634 TO 638 640 TO 643 655 TO 659 661 TO 664 676 TO 680 682 TO 685 697 TO 701 -
 98. 703 TO 706 718 TO 722 724 TO 727 TABLE ST 50X50X1.6SHS
 99. 738 TO 747 778 TO 781 TABLE ST 120X60X2.9RHS
100. DEFINE WIND LOAD

*** NOTE: If any floor diaphragm is present in the model Wind Load definition
          should be defined after Floor Diaphragm definition. Otherwise wind
          load generation may be unsuccessful during analysis.

101. TYPE 1 WIND 1
102. INT 1.11 1.23 1.27 1.4 1.52 1.71 HEIG  10  20  25  30  50  100
103. LOAD 1 LOADTYPE DEAD  TITLE DL
104. MEMBER LOAD
105. 624 TO 627 629 TO 632 729 TO 732 734 TO 737 UNI GY -0.01455
106. 645 TO 648 650 TO 653 666 TO 669 671 TO 674 687 TO 690 692 TO 695 708 TO 711 -
107. 713 TO 716 UNI GY -0.0291
108. SELFWEIGHT Y -1.1
109. LOAD 2 LOADTYPE DEAD  TITLE LL
110. MEMBER LOAD
111. 624 TO 627 629 TO 632 729 TO 732 734 TO 737 UNI GY -0.0815
112. 645 TO 648 650 TO 653 666 TO 669 671 TO 674 687 TO 690 692 TO 695 708 TO 711 -
113. 713 TO 716 UNI GY -0.16305
114. LOAD COMB 101 1.5(DL+LL)
115. 1 1.5 2 1.5
116. LOAD COMB 201 DL + LL
117. 1 1.0 2 1.0
118. PERFORM ANALYSIS PRINT ALL


         P R O B L E M   S T A T I S T I C S
         -----------------------------------

  NUMBER OF JOINTS         70  NUMBER OF MEMBERS     119
  NUMBER OF PLATES          0  NUMBER OF SOLIDS        0
  NUMBER OF SURFACES        0  NUMBER OF SUPPORTS      4

        Using 64-bit analysis engine.

        SOLVER USED IS THE IN-CORE ADVANCED MATH SOLVER

TOTAL      PRIMARY LOAD CASES =     2, TOTAL DEGREES OF FREEDOM =     408
TOTAL LOAD COMBINATION  CASES =     2  SO FAR.
```

STAAD SPACE -- PAGE NO. 4

LOADING 1 LOADTYPE DEAD TITLE DL

MEMBER LOAD - UNIT KN METE

MEMBER	UDL	L1	L2	CON	L	LIN1	LIN2
624	-0.0145 GY	0.00	0.75				
625	-0.0145 GY	0.00	0.78				
626	-0.0145 GY	0.00	0.78				
627	-0.0145 GY	0.00	0.78				
629	-0.0145 GY	0.00	0.76				
630	-0.0145 GY	0.00	0.78				
631	-0.0145 GY	0.00	0.78				
632	-0.0145 GY	0.00	0.78				
729	-0.0145 GY	0.00	0.75				
730	-0.0145 GY	0.00	0.78				
731	-0.0145 GY	0.00	0.78				
732	-0.0145 GY	0.00	0.78				
734	-0.0145 GY	0.00	0.76				
735	-0.0145 GY	0.00	0.78				
736	-0.0145 GY	0.00	0.78				
737	-0.0145 GY	0.00	0.78				
645	-0.0291 GY	0.00	0.75				
646	-0.0291 GY	0.00	0.78				
647	-0.0291 GY	0.00	0.78				
648	-0.0291 GY	0.00	0.78				
650	-0.0291 GY	0.00	0.76				
651	-0.0291 GY	0.00	0.78				
652	-0.0291 GY	0.00	0.78				
653	-0.0291 GY	0.00	0.78				
666	-0.0291 GY	0.00	0.75				
667	-0.0291 GY	0.00	0.78				
668	-0.0291 GY	0.00	0.78				
669	-0.0291 GY	0.00	0.78				
671	-0.0291 GY	0.00	0.76				
672	-0.0291 GY	0.00	0.78				
673	-0.0291 GY	0.00	0.78				
674	-0.0291 GY	0.00	0.78				
687	-0.0291 GY	0.00	0.75				
688	-0.0291 GY	0.00	0.78				
689	-0.0291 GY	0.00	0.78				
690	-0.0291 GY	0.00	0.78				
692	-0.0291 GY	0.00	0.76				
693	-0.0291 GY	0.00	0.78				
694	-0.0291 GY	0.00	0.78				
695	-0.0291 GY	0.00	0.78				
708	-0.0291 GY	0.00	0.75				
709	-0.0291 GY	0.00	0.78				
710	-0.0291 GY	0.00	0.78				
711	-0.0291 GY	0.00	0.78				
713	-0.0291 GY	0.00	0.76				
714	-0.0291 GY	0.00	0.78				

715	-0.0291	GY	0.00	0.78				
716	-0.0291	GY	0.00	0.78				

SELFWEIGHT Y -1.100

ACTUAL WEIGHT OF THE STRUCTURE = 2.059 KN

LOADING 2 LOADTYPE DEAD TITLE LL

MEMBER LOAD - UNIT KN METE

MEMBER	UDL	L1	L2	CON	L	LIN1	LIN2
624	-0.0815 GY	0.00	0.75				
625	-0.0815 GY	0.00	0.78				
626	-0.0815 GY	0.00	0.78				
627	-0.0815 GY	0.00	0.78				
629	-0.0815 GY	0.00	0.76				
630	-0.0815 GY	0.00	0.78				
631	-0.0815 GY	0.00	0.78				
632	-0.0815 GY	0.00	0.78				
729	-0.0815 GY	0.00	0.75				
730	-0.0815 GY	0.00	0.78				
731	-0.0815 GY	0.00	0.78				
732	-0.0815 GY	0.00	0.78				
734	-0.0815 GY	0.00	0.76				
735	-0.0815 GY	0.00	0.78				
736	-0.0815 GY	0.00	0.78				
737	-0.0815 GY	0.00	0.78				
645	-0.1630 GY	0.00	0.75				
646	-0.1630 GY	0.00	0.78				
647	-0.1630 GY	0.00	0.78				
648	-0.1630 GY	0.00	0.78				
650	-0.1630 GY	0.00	0.76				
651	-0.1630 GY	0.00	0.78				
652	-0.1630 GY	0.00	0.78				
653	-0.1630 GY	0.00	0.78				
666	-0.1630 GY	0.00	0.75				
667	-0.1630 GY	0.00	0.78				
668	-0.1630 GY	0.00	0.78				
669	-0.1630 GY	0.00	0.78				
671	-0.1630 GY	0.00	0.76				
672	-0.1630 GY	0.00	0.78				
673	-0.1630 GY	0.00	0.78				
674	-0.1630 GY	0.00	0.78				
687	-0.1630 GY	0.00	0.75				
688	-0.1630 GY	0.00	0.78				
689	-0.1630 GY	0.00	0.78				
690	-0.1630 GY	0.00	0.78				
692	-0.1630 GY	0.00	0.76				
693	-0.1630 GY	0.00	0.78				
694	-0.1630 GY	0.00	0.78				
695	-0.1630 GY	0.00	0.78				

STAAD SPACE -- PAGE NO. 6

708	-0.1630 GY	0.00	0.75
709	-0.1630 GY	0.00	0.78
710	-0.1630 GY	0.00	0.78
711	-0.1630 GY	0.00	0.78
713	-0.1630 GY	0.00	0.76
714	-0.1630 GY	0.00	0.78
715	-0.1630 GY	0.00	0.78
716	-0.1630 GY	0.00	0.78

FOR LOADING - 1
APPLIED JOINT EQUIVALENT LOADS

JOINT	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM-Z
242	-4.65259E-07	-1.78653E-02	0.00000E+00	2.61854E-03	0.00000E+00	0.00000E+00
243	-4.65280E-07	-2.85883E-02	0.00000E+00	2.31668E-03	0.00000E+00	-1.53276E-03
244	3.55811E-11	-3.88224E-02	0.00000E+00	2.31668E-03	0.00000E+00	-1.51389E-04
245	-1.60468E-10	-3.93187E-02	0.00000E+00	2.31668E-03	0.00000E+00	8.33553E-06
246	5.92978E-12	-3.92310E-02	0.00000E+00	2.31668E-03	0.00000E+00	2.98850E-06
247	-2.19935E-11	-3.92069E-02	0.00000E+00	2.31668E-03	0.00000E+00	1.28059E-07
248	0.00000E+00	-1.78653E-02	0.00000E+00	2.61854E-03	0.00000E+00	0.00000E+00
249	-2.40370E-10	-2.87530E-02	0.00000E+00	2.31668E-03	0.00000E+00	1.57411E-03
250	-2.24158E-10	-3.89871E-02	0.00000E+00	2.31668E-03	0.00000E+00	1.10059E-04
251	-1.22787E-10	-3.93187E-02	0.00000E+00	2.31668E-03	0.00000E+00	-8.35868E-06
252	-3.27717E-12	-3.92305E-02	0.00000E+00	2.31668E-03	0.00000E+00	-3.11530E-06
253	-4.65259E-07	-2.22063E-02	0.00000E+00	-2.40149E-03	0.00000E+00	0.00000E+00
254	-4.65235E-07	-4.73715E-02	0.00000E+00	-5.51381E-08	0.00000E+00	-2.20234E-03
255	2.41922E-10	-6.32939E-02	0.00000E+00	-5.51381E-08	0.00000E+00	-2.17523E-04
256	1.50565E-10	-6.40070E-02	0.00000E+00	-5.51381E-08	0.00000E+00	1.19765E-05
257	1.77208E-10	-6.38811E-02	0.00000E+00	-5.51381E-08	0.00000E+00	4.29425E-06
258	4.08725E-11	-6.38465E-02	0.00000E+00	-5.51381E-08	0.00000E+00	1.84355E-07
259	0.00000E+00	-2.22063E-02	0.00000E+00	-2.40149E-03	0.00000E+00	0.00000E+00
260	6.54873E-12	-4.76081E-02	0.00000E+00	-5.51381E-08	0.00000E+00	2.26176E-03
261	1.27903E-10	-6.35307E-02	0.00000E+00	-5.51381E-08	0.00000E+00	1.58139E-04
262	-2.22153E-10	-6.40071E-02	0.00000E+00	-5.51381E-08	0.00000E+00	-1.20102E-05
263	-1.22602E-10	-6.38804E-02	0.00000E+00	-5.51381E-08	0.00000E+00	-4.47607E-06
264	-4.65259E-07	-2.86018E-02	0.00000E+00	1.29072E-03	0.00000E+00	0.00000E+00
265	-4.65235E-07	-4.73713E-02	0.00000E+00	0.00000E+00	0.00000E+00	-2.20234E-03
266	2.41922E-10	-6.32938E-02	0.00000E+00	0.00000E+00	0.00000E+00	-2.17523E-04
267	1.50565E-10	-6.40069E-02	0.00000E+00	0.00000E+00	0.00000E+00	1.19765E-05
268	1.77208E-10	-6.38809E-02	0.00000E+00	0.00000E+00	0.00000E+00	4.29425E-06
269	4.08725E-11	-6.38463E-02	0.00000E+00	0.00000E+00	0.00000E+00	1.84355E-07
270	0.00000E+00	-2.86018E-02	0.00000E+00	1.29072E-03	0.00000E+00	0.00000E+00
271	6.54873E-12	-4.76080E-02	0.00000E+00	0.00000E+00	0.00000E+00	2.26176E-03
272	1.27903E-10	-6.35305E-02	0.00000E+00	0.00000E+00	0.00000E+00	1.58139E-04
273	-2.22153E-10	-6.40070E-02	0.00000E+00	0.00000E+00	0.00000E+00	-1.20102E-05
274	-1.22602E-10	-6.38802E-02	0.00000E+00	0.00000E+00	0.00000E+00	-4.47607E-06
275	-4.65259E-07	-2.75600E-02	0.00000E+00	-1.53588E-03	0.00000E+00	0.00000E+00
276	-4.65235E-07	-4.73715E-02	0.00000E+00	5.51381E-08	0.00000E+00	-2.20234E-03
277	2.41922E-10	-6.32939E-02	0.00000E+00	5.51381E-08	0.00000E+00	-2.17523E-04
278	1.50565E-10	-6.40070E-02	0.00000E+00	5.51381E-08	0.00000E+00	1.19765E-05
279	1.77208E-10	-6.38811E-02	0.00000E+00	5.51381E-08	0.00000E+00	4.29425E-06
280	4.08725E-11	-6.38465E-02	0.00000E+00	5.51381E-08	0.00000E+00	1.84355E-07
281	0.00000E+00	-2.75600E-02	0.00000E+00	-1.53588E-03	0.00000E+00	0.00000E+00
282	6.54873E-12	-4.76081E-02	0.00000E+00	5.51381E-08	0.00000E+00	2.26176E-03
283	1.27903E-10	-6.35307E-02	0.00000E+00	5.51381E-08	0.00000E+00	1.58139E-04
284	-2.22153E-10	-6.40071E-02	0.00000E+00	5.51381E-08	0.00000E+00	-1.20102E-05

STAAD SPACE -- PAGE NO. 7

APPLIED JOINT EQUIVALENT LOADS

JOINT	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM-Z
285	-1.22602E-10	-6.38804E-02	0.00000E+00	5.51381E-08	0.00000E+00	-4.47607E-06
286	-4.65259E-07	-2.32481E-02	0.00000E+00	2.28473E-03	0.00000E+00	0.00000E+00
287	-4.65235E-07	-4.73715E-02	0.00000E+00	-5.51381E-08	0.00000E+00	-2.20234E-03
288	2.41922E-10	-6.32939E-02	0.00000E+00	-5.51381E-08	0.00000E+00	-2.17523E-04
289	1.50565E-10	-6.40070E-02	0.00000E+00	-5.51381E-08	0.00000E+00	1.19765E-05
290	1.77208E-10	-6.38811E-02	0.00000E+00	-5.51381E-08	0.00000E+00	4.29425E-06
291	4.08725E-11	-6.38465E-02	0.00000E+00	-5.51381E-08	0.00000E+00	1.84355E-07
292	0.00000E+00	-2.32481E-02	0.00000E+00	2.28473E-03	0.00000E+00	0.00000E+00
293	6.54873E-12	-4.76081E-02	0.00000E+00	-5.51381E-08	0.00000E+00	2.26176E-03
294	1.27903E-10	-6.35307E-02	0.00000E+00	-5.51381E-08	0.00000E+00	1.58139E-04
295	-2.22153E-10	-6.40071E-02	0.00000E+00	-5.51381E-08	0.00000E+00	-1.20102E-05
296	-1.22602E-10	-6.38804E-02	0.00000E+00	-5.51381E-08	0.00000E+00	-4.47607E-06
297	-4.65259E-07	-1.78651E-02	0.00000E+00	-2.61848E-03	0.00000E+00	0.00000E+00
298	-4.65280E-07	-2.85882E-02	0.00000E+00	-2.31662E-03	0.00000E+00	-1.53276E-03
299	3.55811E-11	-3.88222E-02	0.00000E+00	-2.31662E-03	0.00000E+00	-1.51389E-04
300	-1.60468E-10	-3.93185E-02	0.00000E+00	-2.31662E-03	0.00000E+00	8.33553E-06
301	5.92978E-12	-3.92309E-02	0.00000E+00	-2.31662E-03	0.00000E+00	2.98850E-06
302	-2.19935E-11	-3.92068E-02	0.00000E+00	-2.31662E-03	0.00000E+00	1.28059E-07
303	0.00000E+00	-1.78651E-02	0.00000E+00	-2.61848E-03	0.00000E+00	0.00000E+00
304	-2.40370E-10	-2.87529E-02	0.00000E+00	-2.31662E-03	0.00000E+00	1.57411E-03
305	-2.24158E-10	-3.89870E-02	0.00000E+00	-2.31662E-03	0.00000E+00	1.10059E-04
306	-1.22787E-10	-3.93186E-02	0.00000E+00	-2.31662E-03	0.00000E+00	-8.35868E-06
307	-3.27717E-12	-3.92304E-02	0.00000E+00	-2.31662E-03	0.00000E+00	-3.11530E-06
314	0.00000E+00	-1.50777E-02	0.00000E+00	1.11071E-03	0.00000E+00	0.00000E+00
315	0.00000E+00	-1.50777E-02	0.00000E+00	1.11071E-03	0.00000E+00	0.00000E+00
316	0.00000E+00	-1.50778E-02	0.00000E+00	-7.48844E-04	0.00000E+00	0.00000E+00
317	0.00000E+00	-1.50778E-02	0.00000E+00	-7.48844E-04	0.00000E+00	0.00000E+00

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 1
LOADTYPE DEAD TITLE DL

CENTER OF FORCE BASED ON X FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.116898720E-02
Y = 0.149151419E+00
Z = 0.127601846E+03

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.306956685E+01
Y = 0.428751507E+00
Z = 0.127604998E+03

TOTAL APPLIED LOAD 1

***TOTAL APPLIED LOAD (KN METE) SUMMARY (LOADING 1)
SUMMATION FORCE-X = -0.00
SUMMATION FORCE-Y = -3.16
SUMMATION FORCE-Z = 0.00

STAAD SPACE -- PAGE NO. 8

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 403.69 MY= -0.00 MZ= -9.71

TOTAL REACTION LOAD 1

***TOTAL REACTION LOAD(KN METE) SUMMARY (LOADING 1)
SUMMATION FORCE-X = 0.00
SUMMATION FORCE-Y = 3.16
SUMMATION FORCE-Z = 0.00

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= -403.69 MY= 0.00 MZ= 9.71

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 1)

	MAXIMUMS	AT NODE
X =	-1.17064E-01	297
Y =	-8.11014E-01	302
Z =	3.79245E-03	302
RX=	7.36725E-04	299
RY=	-1.10038E-03	286
RZ=	-3.58793E-03	289

EXTERNAL AND INTERNAL JOINT LOAD SUMMARY (KN METE)-

JT	EXT FX/ INT FX	EXT FY/ INT FY	EXT FZ/ INT FZ	EXT MX/ INT MX	EXT MY/ INT MY	EXT MZ/ INT MZ	
							SUPPORT=1
314	0.00	-0.02	0.00	0.00	0.00	0.00	
	-1.34	-0.75	0.49	-0.00	0.00	-0.00	111000
315	0.00	-0.02	0.00	0.00	0.00	0.00	
	1.34	-0.75	0.49	-0.00	0.00	-0.00	111000
316	0.00	-0.02	0.00	-0.00	0.00	0.00	
	-1.37	-0.80	-0.49	0.00	-0.00	0.00	111000
317	0.00	-0.02	0.00	-0.00	0.00	0.00	
	1.37	-0.80	-0.49	0.00	-0.00	-0.00	111000

FOR LOADING - 2
APPLIED JOINT EQUIVALENT LOADS

JOINT	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM-Z
243	-2.73957E-10	-3.04918E-02	0.00000E+00	0.00000E+00	0.00000E+00	-3.75057E-03
244	8.72195E-10	-6.23547E-02	0.00000E+00	0.00000E+00	0.00000E+00	-3.70442E-04
245	-1.28733E-10	-6.35691E-02	0.00000E+00	0.00000E+00	0.00000E+00	2.03965E-05
246	-1.74369E-10	-6.33547E-02	0.00000E+00	0.00000E+00	0.00000E+00	7.31316E-06
247	5.89846E-11	-6.32957E-02	0.00000E+00	0.00000E+00	0.00000E+00	3.14413E-07
249	-1.30792E-10	-3.08948E-02	0.00000E+00	0.00000E+00	0.00000E+00	3.85176E-03
250	1.75170E-10	-6.27579E-02	0.00000E+00	0.00000E+00	0.00000E+00	2.69309E-04
251	-3.33790E-10	-6.35693E-02	0.00000E+00	0.00000E+00	0.00000E+00	-2.04533E-05
252	-1.49027E-10	-6.33534E-02	0.00000E+00	0.00000E+00	0.00000E+00	-7.62294E-06
254	4.38264E-10	-6.10024E-02	0.00000E+00	0.00000E+00	0.00000E+00	-7.50345E-03
255	-9.47269E-10	-1.24748E-01	0.00000E+00	0.00000E+00	0.00000E+00	-7.41110E-04
256	3.17023E-10	-1.27177E-01	0.00000E+00	0.00000E+00	0.00000E+00	4.08047E-05
257	-3.59655E-10	-1.26748E-01	0.00000E+00	0.00000E+00	0.00000E+00	1.46314E-05
258	8.81457E-11	-1.26630E-01	0.00000E+00	0.00000E+00	0.00000E+00	6.28827E-07

STAAD SPACE -- PAGE NO. 9

APPLIED JOINT EQUIVALENT LOADS

JOINT	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM-Z
261	-1.76141E-10	-1.25554E-01	0.00000E+00	0.00000E+00	0.00000E+00	5.38783E-04
262	-2.02597E-10	-1.27178E-01	0.00000E+00	0.00000E+00	0.00000E+00	-4.09192E-05
263	1.98955E-10	-1.26746E-01	0.00000E+00	0.00000E+00	0.00000E+00	-1.52518E-05
265	4.38264E-10	-6.10024E-02	0.00000E+00	0.00000E+00	0.00000E+00	-7.50345E-03
266	-9.47269E-10	-1.24748E-01	0.00000E+00	0.00000E+00	0.00000E+00	-7.41110E-04
267	3.17023E-10	-1.27177E-01	0.00000E+00	0.00000E+00	0.00000E+00	4.08047E-05
268	-3.59655E-10	-1.26748E-01	0.00000E+00	0.00000E+00	0.00000E+00	1.46314E-05
269	8.81457E-11	-1.26630E-01	0.00000E+00	0.00000E+00	0.00000E+00	6.28827E-07
271	-1.24040E-09	-6.18086E-02	0.00000E+00	0.00000E+00	0.00000E+00	7.70588E-03
272	-1.76141E-10	-1.25554E-01	0.00000E+00	0.00000E+00	0.00000E+00	5.38783E-04
273	-2.02597E-10	-1.27178E-01	0.00000E+00	0.00000E+00	0.00000E+00	-4.09192E-05
274	1.98955E-10	-1.26746E-01	0.00000E+00	0.00000E+00	0.00000E+00	-1.52518E-05
276	4.38264E-10	-6.10024E-02	0.00000E+00	0.00000E+00	0.00000E+00	-7.50345E-03
277	-9.47269E-10	-1.24748E-01	0.00000E+00	0.00000E+00	0.00000E+00	-7.41110E-04
278	3.17023E-10	-1.27177E-01	0.00000E+00	0.00000E+00	0.00000E+00	4.08047E-05
279	-3.59655E-10	-1.26748E-01	0.00000E+00	0.00000E+00	0.00000E+00	1.46314E-05
280	8.81457E-11	-1.26630E-01	0.00000E+00	0.00000E+00	0.00000E+00	6.28827E-07
282	-1.24040E-09	-6.18086E-02	0.00000E+00	0.00000E+00	0.00000E+00	7.70588E-03
283	-1.76141E-10	-1.25554E-01	0.00000E+00	0.00000E+00	0.00000E+00	5.38783E-04
284	-2.02597E-10	-1.27178E-01	0.00000E+00	0.00000E+00	0.00000E+00	-4.09192E-05
285	1.98955E-10	-1.26746E-01	0.00000E+00	0.00000E+00	0.00000E+00	-1.52518E-05
287	4.38264E-10	-6.10024E-02	0.00000E+00	0.00000E+00	0.00000E+00	-7.50345E-03
288	-9.47269E-10	-1.24748E-01	0.00000E+00	0.00000E+00	0.00000E+00	-7.41110E-04
289	3.17023E-10	-1.27177E-01	0.00000E+00	0.00000E+00	0.00000E+00	4.08047E-05
290	-3.59655E-10	-1.26748E-01	0.00000E+00	0.00000E+00	0.00000E+00	1.46314E-05
291	8.81457E-11	-1.26630E-01	0.00000E+00	0.00000E+00	0.00000E+00	6.28827E-07
293	-1.24040E-09	-6.18086E-02	0.00000E+00	0.00000E+00	0.00000E+00	7.70588E-03
294	-1.76141E-10	-1.25554E-01	0.00000E+00	0.00000E+00	0.00000E+00	5.38783E-04
295	-2.02597E-10	-1.27178E-01	0.00000E+00	0.00000E+00	0.00000E+00	-4.09192E-05
296	1.98955E-10	-1.26746E-01	0.00000E+00	0.00000E+00	0.00000E+00	-1.52518E-05
298	-2.73957E-10	-3.04918E-02	0.00000E+00	0.00000E+00	0.00000E+00	-3.75057E-03
299	8.72195E-10	-6.23547E-02	0.00000E+00	0.00000E+00	0.00000E+00	-3.70442E-04
300	-1.28733E-10	-6.35691E-02	0.00000E+00	0.00000E+00	0.00000E+00	2.03965E-05
301	-1.74369E-10	-6.33547E-02	0.00000E+00	0.00000E+00	0.00000E+00	7.31316E-06
302	5.89846E-11	-6.32957E-02	0.00000E+00	0.00000E+00	0.00000E+00	3.14413E-07
304	-1.30792E-10	-3.08948E-02	0.00000E+00	0.00000E+00	0.00000E+00	3.85176E-03
305	1.75170E-10	-6.27579E-02	0.00000E+00	0.00000E+00	0.00000E+00	2.69309E-04
306	-3.33790E-10	-6.35693E-02	0.00000E+00	0.00000E+00	0.00000E+00	-2.04533E-05
307	-1.49027E-10	-6.33534E-02	0.00000E+00	0.00000E+00	0.00000E+00	-7.62294E-06

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 2
LOADTYPE DEAD TITLE LL

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.307100842E+01
Y = 0.491346594E+00
Z = 0.127605000E+03

STAAD SPACE -- PAGE NO. 10

TOTAL APPLIED LOAD 2

***TOTAL APPLIED LOAD (KN METE) SUMMARY (LOADING 2)
SUMMATION FORCE-X = -0.00
SUMMATION FORCE-Y = -5.04
SUMMATION FORCE-Z = 0.00

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 642.83 MY= -0.00 MZ= -15.47

TOTAL REACTION LOAD 2

***TOTAL REACTION LOAD(KN METE) SUMMARY (LOADING 2)
SUMMATION FORCE-X = 0.00
SUMMATION FORCE-Y = 5.04
SUMMATION FORCE-Z = 0.00

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= -642.83 MY= 0.00 MZ= 15.47

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 2)

	MAXIMUMS	AT NODE
X =	-2.16019E-01	297
Y =	-1.48608E+00	302
Z =	6.73679E-03	302
RX=	1.22674E-03	299
RY=	-2.04726E-03	286
RZ=	-6.78494E-03	289

EXTERNAL AND INTERNAL JOINT LOAD SUMMARY (KN METE)-

JT	EXT FX/ INT FX	EXT FY/ INT FY	EXT FZ/ INT FZ	EXT MX/ INT MX	EXT MY/ INT MY	EXT MZ/ INT MZ	
							SUPPORT=1
314	0.00	0.00	0.00	0.00	0.00	0.00	
	-2.57	-1.22	0.70	-0.00	-0.00	-0.00	111000
315	0.00	0.00	0.00	0.00	0.00	0.00	
	2.57	-1.22	0.70	-0.00	-0.00	0.00	111000
316	0.00	0.00	0.00	0.00	0.00	0.00	
	-2.61	-1.30	-0.70	-0.00	-0.00	-0.00	111000
317	0.00	0.00	0.00	0.00	0.00	0.00	
	2.61	-1.30	-0.70	-0.00	-0.00	-0.00	111000

LOAD COMBINATION NO. 101
1.5(DL+LL)

LOADING-	1.	2.
FACTOR -	1.50	1.50

LOAD COMBINATION NO. 201
DL + LL

LOADING-	1.	2.

********** END OF DATA FROM INTERNAL STORAGE **********

119. PARAMETER 1
120. CODE IS800 LSD
121. FYLD 214000 ALL
122. CHECK CODE ALL
STEEL DESIGN

***WARNING: THE VALUE OF E FOR MEMBER 624 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 625 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 626 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 627 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 629 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 630 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 631 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 632 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 644 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 645 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 646 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 647 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 648 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 649 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 650 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 651 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 652 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 653 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 665 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 666 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 667 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 668 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 669 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 670 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 671 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 672 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 673 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 674 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 686 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 687 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 688 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 689 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 690 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 691 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 692 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 693 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 694 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 695 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 707 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 708 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 709 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 710 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 711 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 713 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 714 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 715 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 716 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 728 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 729 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 730 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 731 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 732 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 733 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 734 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 735 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 736 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 737 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 738 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 739 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 740 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 741 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 742 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 743 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 744 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 745 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 746 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 747 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 778 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 779 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 780 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 781 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 996 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 997 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

***WARNING: THE VALUE OF E FOR MEMBER 998 DOES NOT SEEM TO BE A REALISTIC VALUE FOR STEEL.

Member Number: 624					
Member Section: ST	60X60X2.9SHS	(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio:	0.180	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 625					
Member Section: ST	60X60X2.9SHS	(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio:	0.188	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 626					
Member Section: ST	60X60X2.9SHS	(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio:	0.187	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

STAAD SPACE -- PAGE NO. 16

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 627					
Member Section: ST 60X60X2.9SHS	(APL APOLLOTUBE SECTIONS)				
Status: PASS Ratio: 0.187	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Compression)					

Member Number: 629					
Member Section: ST 60X60X2.9SHS	(APL APOLLOTUBE SECTIONS)				
Status: PASS Ratio: 0.182	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Compression)					

Member Number: 630					
Member Section: ST 60X60X2.9SHS	(APL APOLLOTUBE SECTIONS)				
Status: PASS Ratio: 0.188	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Compression)					

Member Number: 631					
Member Section: ST 60X60X2.9SHS	(APL APOLLOTUBE SECTIONS)				
Status: PASS Ratio: 0.187	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Compression)					

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 632					
Member Section: ST 60X60X2.9SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio: 0.187	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Compression)					

Member Number: 634					
Member Section: ST 50X50X1.6SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio: 0.133	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Tension)					

Member Number: 635					
Member Section: ST 50X50X1.6SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio: 0.133	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Tension)					

Member Number: 636					
Member Section: ST 50X50X1.6SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio: 0.133	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Tension)					

STAAD SPACE -- PAGE NO. 18

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 637					
Member Section: ST 50X50X1.6SHS	(APL APOLLOTUBE SECTIONS)				
Status: PASS Ratio: 0.133	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Tension)					

Member Number: 638					
Member Section: ST 50X50X1.6SHS	(APL APOLLOTUBE SECTIONS)				
Status: PASS Ratio: 0.133	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Tension)					

Member Number: 640					
Member Section: ST 50X50X1.6SHS	(APL APOLLOTUBE SECTIONS)				
Status: PASS Ratio: 0.133	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Tension)					

Member Number: 641					
Member Section: ST 50X50X1.6SHS	(APL APOLLOTUBE SECTIONS)				
Status: PASS Ratio: 0.133	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Tension)					

STAAD SPACE -- PAGE NO. 19

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 642					
Member Section: ST 50X50X1.6SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS	Ratio: 0.133	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Tension)					

Member Number: 643					
Member Section: ST 50X50X1.6SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS	Ratio: 0.133	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Tension)					

Member Number: 644					
Member Section: ST 60X60X2.9SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS	Ratio: 0.341	Critical Load Case:	101	Location:	0.30
Critical Condition: Sec. 8.2.1.2					

Member Number: 645					
Member Section: ST 60X60X2.9SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS	Ratio: 0.330	Critical Load Case:	101	Location:	0.00
Critical Condition: Sec. 9.3.2.2					

STAAD SPACE -- PAGE NO. 20

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 646					
Member Section: ST 60X60X2.9SHS	(APL APOLLOTUBE SECTIONS)				
Status: PASS Ratio: 0.188	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Compression)					

Member Number: 647					
Member Section: ST 60X60X2.9SHS	(APL APOLLOTUBE SECTIONS)				
Status: PASS Ratio: 0.187	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Compression)					

Member Number: 648					
Member Section: ST 60X60X2.9SHS	(APL APOLLOTUBE SECTIONS)				
Status: PASS Ratio: 0.187	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Compression)					

Member Number: 649					
Member Section: ST 60X60X2.9SHS	(APL APOLLOTUBE SECTIONS)				
Status: PASS Ratio: 0.341	Critical Load Case:	101	Location:	0.30	
Critical Condition: Sec. 8.2.1.2					

STAAD SPACE -- PAGE NO. 21

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 650					
Member Section: ST 60X60X2.9SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS	Ratio: 0.330	Critical Load Case: 101	Location:	0.00	
Critical Condition: Sec. 9.3.2.2					

Member Number: 651					
Member Section: ST 60X60X2.9SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS	Ratio: 0.188	Critical Load Case: 1	Location:	0.00	
Critical Condition: Slenderness (Compression)					

Member Number: 652					
Member Section: ST 60X60X2.9SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS	Ratio: 0.187	Critical Load Case: 1	Location:	0.00	
Critical Condition: Slenderness (Compression)					

Member Number: 653					
Member Section: ST 60X60X2.9SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS	Ratio: 0.187	Critical Load Case: 1	Location:	0.00	
Critical Condition: Slenderness (Compression)					

STAAD SPACE -- PAGE NO. 22

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 655					
Member Section: ST 50X50X1.6SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS	Ratio: 0.133	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Tension)					

Member Number: 656					
Member Section: ST 50X50X1.6SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS	Ratio: 0.133	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Tension)					

Member Number: 657					
Member Section: ST 50X50X1.6SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS	Ratio: 0.133	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Tension)					

Member Number: 658					
Member Section: ST 50X50X1.6SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS	Ratio: 0.133	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Tension)					

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 659					
Member Section: ST 50X50X1.6SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio: 0.133	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Tension)					

Member Number: 661					
Member Section: ST 50X50X1.6SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio: 0.133	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Tension)					

Member Number: 662					
Member Section: ST 50X50X1.6SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio: 0.133	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Tension)					

Member Number: 663					
Member Section: ST 50X50X1.6SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio: 0.133	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Tension)					

STAAD SPACE -- PAGE NO. 24

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 664					
Member Section: ST 50X50X1.6SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS	Ratio: 0.133	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Tension)					

Member Number: 665					
Member Section: ST 60X60X2.9SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS	Ratio: 0.221	Critical Load Case:	101	Location:	0.30
Critical Condition: Sec. 8.2.1.2					

Member Number: 666					
Member Section: ST 60X60X2.9SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS	Ratio: 0.240	Critical Load Case:	101	Location:	0.00
Critical Condition: Sec. 9.3.2.2					

Member Number: 667					
Member Section: ST 60X60X2.9SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS	Ratio: 0.188	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 668					
Member Section: ST 60X60X2.9SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS	Ratio: 0.187	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 669					
Member Section: ST 60X60X2.9SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS	Ratio: 0.187	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 670					
Member Section: ST 60X60X2.9SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS	Ratio: 0.221	Critical Load Case:	101	Location:	0.30
Critical Condition: Sec. 8.2.1.2					

Member Number: 671					
Member Section: ST 60X60X2.9SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS	Ratio: 0.240	Critical Load Case:	101	Location:	0.00
Critical Condition: Sec. 9.3.2.2					

STAAD SPACE -- PAGE NO. 26

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 672					
Member Section: ST 60X60X2.9SHS	(APL APOLLOTUBE SECTIONS)				
Status: PASS Ratio: 0.188	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Compression)					

Member Number: 673					
Member Section: ST 60X60X2.9SHS	(APL APOLLOTUBE SECTIONS)				
Status: PASS Ratio: 0.187	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Compression)					

Member Number: 674					
Member Section: ST 60X60X2.9SHS	(APL APOLLOTUBE SECTIONS)				
Status: PASS Ratio: 0.187	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Compression)					

Member Number: 676					
Member Section: ST 50X50X1.6SHS	(APL APOLLOTUBE SECTIONS)				
Status: PASS Ratio: 0.133	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Tension)					

STAAD SPACE -- PAGE NO. 27

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 677					
Member Section: ST 50X50X1.6SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio: 0.133	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Tension)					

Member Number: 678					
Member Section: ST 50X50X1.6SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio: 0.133	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Tension)					

Member Number: 679					
Member Section: ST 50X50X1.6SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio: 0.133	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Tension)					

Member Number: 680					
Member Section: ST 50X50X1.6SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio: 0.133	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Tension)					

STAAD SPACE -- PAGE NO. 28

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 682					
Member Section: ST 50X50X1.6SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio: 0.133	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Tension)					

Member Number: 683					
Member Section: ST 50X50X1.6SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio: 0.133	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Tension)					

Member Number: 684					
Member Section: ST 50X50X1.6SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio: 0.133	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Tension)					

Member Number: 685					
Member Section: ST 50X50X1.6SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio: 0.133	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Tension)					

STAAD SPACE -- PAGE NO. 29

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 686					
Member Section: ST 60X60X2.9SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio: 0.244	Critical Load Case: 101		Location:	0.30	
Critical Condition: Sec. 8.2.1.2					

Member Number: 687					
Member Section: ST 60X60X2.9SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio: 0.258	Critical Load Case: 101		Location:	0.00	
Critical Condition: Sec. 9.3.2.2					

Member Number: 688					
Member Section: ST 60X60X2.9SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio: 0.188	Critical Load Case: 1		Location:	0.00	
Critical Condition: Slenderness (Compression)					

Member Number: 689					
Member Section: ST 60X60X2.9SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio: 0.187	Critical Load Case: 1		Location:	0.00	
Critical Condition: Slenderness (Compression)					

STAAD SPACE -- PAGE NO. 30

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 690					
Member Section: ST 60X60X2.9SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS	Ratio: 0.187	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 691					
Member Section: ST 60X60X2.9SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS	Ratio: 0.244	Critical Load Case:	101	Location:	0.30
Critical Condition: Sec. 8.2.1.2					

Member Number: 692					
Member Section: ST 60X60X2.9SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS	Ratio: 0.259	Critical Load Case:	101	Location:	0.00
Critical Condition: Sec. 9.3.2.2					

Member Number: 693					
Member Section: ST 60X60X2.9SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS	Ratio: 0.188	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

STAAD SPACE -- PAGE NO. 31

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 694					
Member Section: ST 60X60X2.9SHS	(APL APOLLOTUBE SECTIONS)				
Status: PASS Ratio: 0.187	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Compression)					

Member Number: 695					
Member Section: ST 60X60X2.9SHS	(APL APOLLOTUBE SECTIONS)				
Status: PASS Ratio: 0.187	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Compression)					

Member Number: 697					
Member Section: ST 50X50X1.6SHS	(APL APOLLOTUBE SECTIONS)				
Status: PASS Ratio: 0.133	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Tension)					

Member Number: 698					
Member Section: ST 50X50X1.6SHS	(APL APOLLOTUBE SECTIONS)				
Status: PASS Ratio: 0.133	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Tension)					

STAAD SPACE -- PAGE NO. 32

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 699					
Member Section: ST 50X50X1.6SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio: 0.133	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Tension)					

Member Number: 700					
Member Section: ST 50X50X1.6SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio: 0.133	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Tension)					

Member Number: 701					
Member Section: ST 50X50X1.6SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio: 0.133	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Tension)					

Member Number: 703					
Member Section: ST 50X50X1.6SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio: 0.133	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Tension)					

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 704					
Member Section: ST	50X50X1.6SHS	(APL APOLLOTUBE SECTIONS)			
Status: PASS	Ratio: 0.133	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Tension)					

Member Number: 705					
Member Section: ST	50X50X1.6SHS	(APL APOLLOTUBE SECTIONS)			
Status: PASS	Ratio: 0.133	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Tension)					

Member Number: 706					
Member Section: ST	50X50X1.6SHS	(APL APOLLOTUBE SECTIONS)			
Status: PASS	Ratio: 0.133	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Tension)					

Member Number: 707					
Member Section: ST	60X60X2.9SHS	(APL APOLLOTUBE SECTIONS)			
Status: PASS	Ratio: 0.331	Critical Load Case:	101	Location:	0.30
Critical Condition: Sec. 9.3.2.2					

STAAD SPACE -- PAGE NO. 34

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 708					
Member Section: ST 60X60X2.9SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio: 0.323	Critical Load Case: 101		Location:	0.00	
Critical Condition: Sec. 9.3.2.2					

Member Number: 709					
Member Section: ST 60X60X2.9SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio: 0.188	Critical Load Case: 1		Location:	0.00	
Critical Condition: Slenderness (Compression)					

Member Number: 710					
Member Section: ST 60X60X2.9SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio: 0.187	Critical Load Case: 1		Location:	0.00	
Critical Condition: Slenderness (Compression)					

Member Number: 711					
Member Section: ST 60X60X2.9SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio: 0.187	Critical Load Case: 1		Location:	0.00	
Critical Condition: Slenderness (Compression)					

STAAD SPACE -- PAGE NO. 35

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 713					
Member Section: ST	60X60X2.9SHS	(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio:	0.323	Critical Load Case:	101	Location:	0.00
Critical Condition: Sec. 9.3.2.2					

Member Number: 714					
Member Section: ST	60X60X2.9SHS	(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio:	0.188	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 715					
Member Section: ST	60X60X2.9SHS	(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio:	0.187	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 716					
Member Section: ST	60X60X2.9SHS	(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio:	0.187	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

STAAD SPACE -- PAGE NO. 36

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 718					
Member Section: ST 50X50X1.6SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio: 0.133	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Tension)					

Member Number: 719					
Member Section: ST 50X50X1.6SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio: 0.133	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Tension)					

Member Number: 720					
Member Section: ST 50X50X1.6SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio: 0.133	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Tension)					

Member Number: 721					
Member Section: ST 50X50X1.6SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio: 0.133	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Tension)					

STAAD SPACE -- PAGE NO. 37

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 722					
Member Section: ST 50X50X1.6SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio: 0.133	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Tension)					

Member Number: 724					
Member Section: ST 50X50X1.6SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio: 0.133	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Tension)					

Member Number: 725					
Member Section: ST 50X50X1.6SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio: 0.133	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Tension)					

Member Number: 726					
Member Section: ST 50X50X1.6SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio: 0.133	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Tension)					

STAAD SPACE -- PAGE NO. 38

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 727					
Member Section: ST 50X50X1.6SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio: 0.133	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Tension)					

Member Number: 728					
Member Section: ST 60X60X2.9SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio: 0.129	Critical Load Case:	101	Location:	0.00	
Critical Condition: Sec. 9.3.2.2					

Member Number: 729					
Member Section: ST 60X60X2.9SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio: 0.136	Critical Load Case:	101	Location:	0.00	
Critical Condition: Sec. 8.2.1.2					

Member Number: 730					
Member Section: ST 60X60X2.9SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio: 0.188	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Compression)					

STAAD SPACE -- PAGE NO. 39

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 731					
Member Section: ST 60X60X2.9SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS	Ratio: 0.187	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 732					
Member Section: ST 60X60X2.9SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS	Ratio: 0.187	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 733					
Member Section: ST 60X60X2.9SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS	Ratio: 0.129	Critical Load Case:	101	Location:	0.00
Critical Condition: Sec. 9.3.2.2					

Member Number: 734					
Member Section: ST 60X60X2.9SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS	Ratio: 0.135	Critical Load Case:	101	Location:	0.00
Critical Condition: Sec. 8.2.1.2					

STAAD SPACE -- PAGE NO. 40

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 735					
Member Section: ST	60X60X2.9SHS	(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio:	0.188	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 736					
Member Section: ST	60X60X2.9SHS	(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio:	0.187	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 737					
Member Section: ST	60X60X2.9SHS	(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio:	0.187	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 738					
Member Section: ST	120X60X2.9RHS	(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio:	0.230	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

STAAD SPACE -- PAGE NO. 41

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 739					
Member Section: ST 120X60X2.9RHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS	Ratio: 0.230	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 740					
Member Section: ST 120X60X2.9RHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS	Ratio: 0.230	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Compression)					

Member Number: 741					
Member Section: ST 120X60X2.9RHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS	Ratio: 0.231	Critical Load Case:	101	Location:	0.67
Critical Condition: Sec. 8.2.1.2					

Member Number: 742					
Member Section: ST 120X60X2.9RHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS	Ratio: 0.104	Critical Load Case:	1	Location:	0.00
Critical Condition: Slenderness (Tension)					

STAAD SPACE -- PAGE NO. 42

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 743					
Member Section: ST 120X60X2.9RHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio: 0.207	Critical Load Case:	101	Location:	0.30	
Critical Condition: Sec. 8.2.1.2					

Member Number: 744					
Member Section: ST 120X60X2.9RHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio: 0.230	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Compression)					

Member Number: 745					
Member Section: ST 120X60X2.9RHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio: 0.231	Critical Load Case:	101	Location:	0.67	
Critical Condition: Sec. 8.2.1.2					

Member Number: 746					
Member Section: ST 120X60X2.9RHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio: 0.104	Critical Load Case:	1	Location:	0.00	
Critical Condition: Slenderness (Tension)					

STAAD SPACE -- PAGE NO. 43

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 747					
Member Section: ST	120X60X2.9RHS	(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio:	0.207	Critical Load Case:	101	Location:	0.30
Critical Condition: Sec. 8.2.1.2					

Member Number: 778					
Member Section: ST	120X60X2.9RHS	(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio:	0.207	Critical Load Case:	101	Location:	0.00
Critical Condition: Sec. 8.2.1.2					

Member Number: 779					
Member Section: ST	120X60X2.9RHS	(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio:	0.207	Critical Load Case:	101	Location:	0.00
Critical Condition: Sec. 8.2.1.2					

Member Number: 780					
Member Section: ST	120X60X2.9RHS	(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio:	0.231	Critical Load Case:	101	Location:	0.00
Critical Condition: Sec. 8.2.1.2					

STAAD SPACE -- PAGE NO. 44

STAAD.PRO CODE CHECKING - IS-800-2007-LSD (V2.2)
****

Member Number: 781					
Member Section: ST 120X60X2.9RHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio: 0.231	Critical Load Case: 101	Location:	0.00		
Critical Condition: Sec. 8.2.1.2					

Member Number: 996					
Member Section: ST 60X60X2.9SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio: 0.124	Critical Load Case: 101	Location:	0.00		
Critical Condition: Sec. 9.3.2.2					

Member Number: 997					
Member Section: ST 60X60X2.9SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio: 0.124	Critical Load Case: 101	Location:	0.00		
Critical Condition: Sec. 9.3.2.2					

Member Number: 998					
Member Section: ST 60X60X2.9SHS		(APL APOLLOTUBE SECTIONS)			
Status: PASS Ratio: 0.331	Critical Load Case: 101	Location:	0.30		
Critical Condition: Sec. 9.3.2.2					

123. FINISH

********** END OF THE STAAD.Pro RUN **********

**** DATE= SEP 10,2026 TIME= 12:20:41 ****

****
* For technical assistance on STAAD.Pro, please visit *
* http://www.bentley.com/en/support/ *
* *
* Details about additional assistance from *
* Bentley and Partners can be found at program menu *
* Help->Technical Support *
* *
* Copyright (c) Bentley Systems, Inc. *
* http://www.bentley.com *
****