





DETAIL B



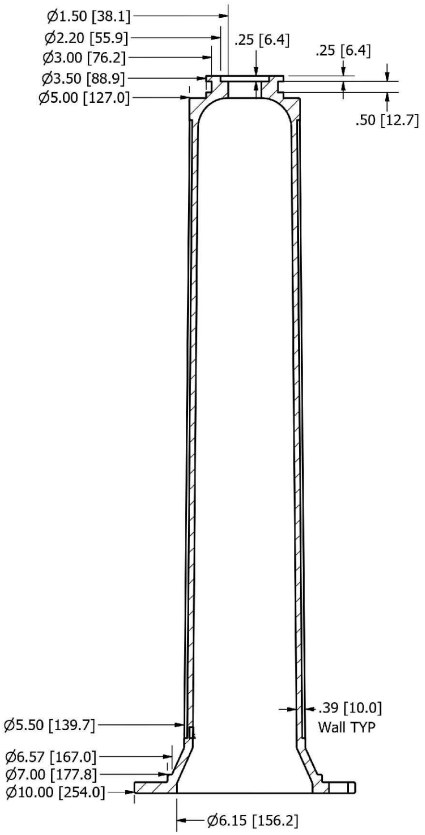

SECTION A-A

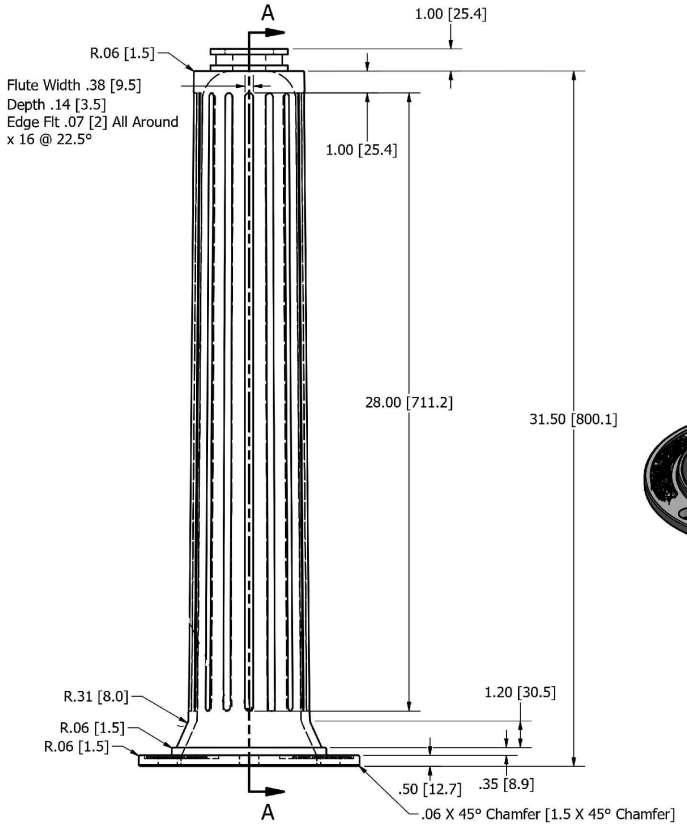

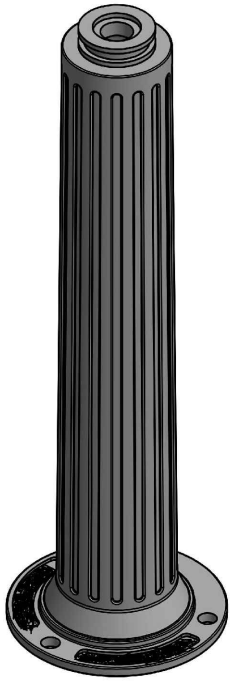

Notes:
1) Material: Ductile Iron ASTM A536 Grade 65-45-12
2) Clean and deburr, remove all sharp edges
3) Entire exterior surface must be machined, no voids/cracks allowed
4) Max. exterior surface roughness 125 micro inches

UNLESS OTHERWISE SPECIFIED: DIMEMSIONS ARE IN INCHES	DESIGN	7/16/14
TOLERANCES: ANGULAR: MACH ± 0.5° BEND ±1° THREE PLACES DECIMAL: ± 0.010 TWO PLACES DECIMAL: ± 0.050 ONE PLACE DECIMAL: ± 0.100	ENGINEER	7/16/18
	VERIFY	7/16/18
	APPROVED	7/16/18

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

TITLE

Bollard Base R-7530-B

SIZE		DWG NO	REV
C		0270	B3

SHEET 1 OF 1