
1

REVERSE THE TRUCK UPTO DISTANCE OF 150 - 200 MM FROM THE D/L LIP

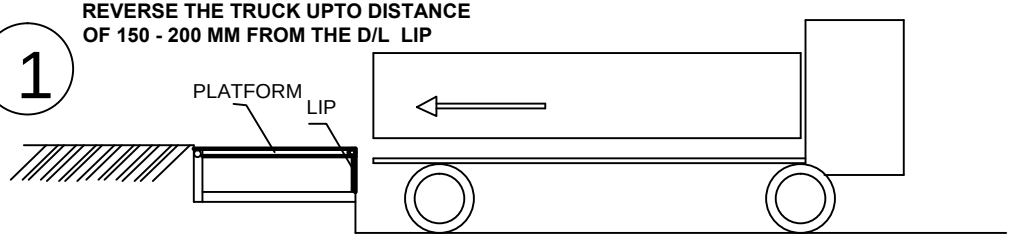


NOTE : ENSURE THAT EDGES OF TRUCK LOAD BODY ARE OUTSIDE LIP WIDTH I.E. CHECK ALIGNMENT OF LIP WITH TRUCK BODY.

2

HOLD PLATFORM UP BUTTON IN PRESSED POSITION.


PLATFORM WILL BE LIFTED TILL TOP MOST POSITION.

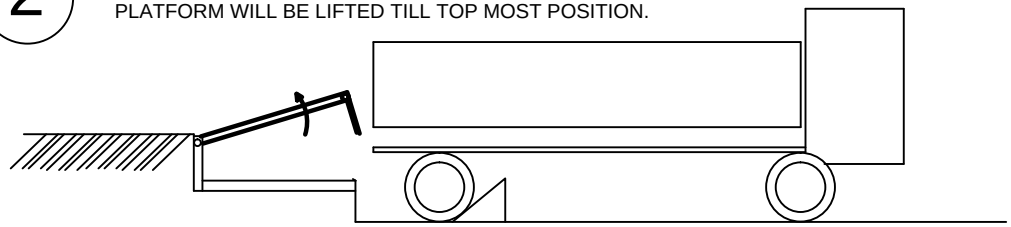

3

HOLD LIP UP BUTTON IN PRESSED POSITION.


LIP WILL BE LIFTED TILL IT STOP.

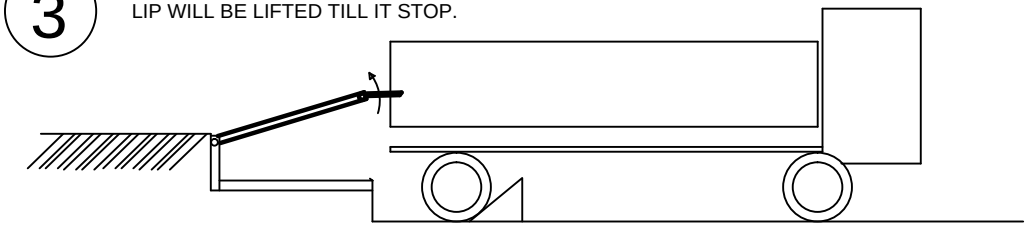

4

HOLD PLATFORM DOWN BUTTON IN PRESSED POSITION.


LIP WILL BE RESTED ON TRCK BED.

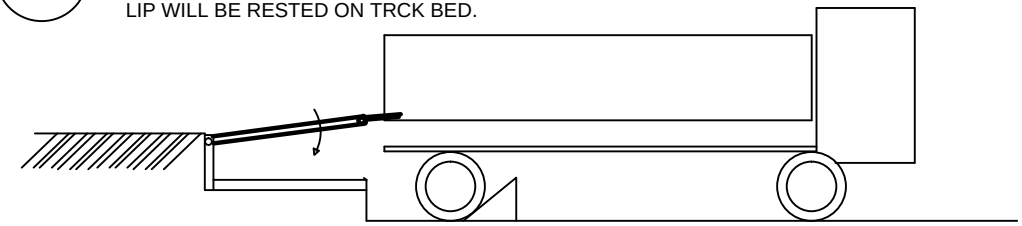

UNLOAD OR LOAD THE MATERIAL FROM THE TRUCK.


5

PRESS PLATFORM UP TO CLEAR THE LIP FROM TRUCK BED THAT TIME THE LIP WILL COME DOWN .

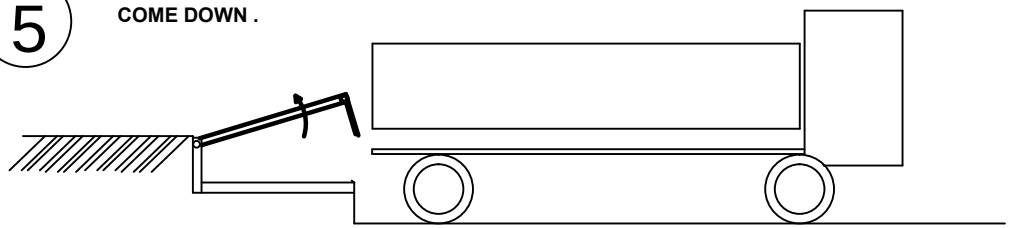

6

DRIVE THE TRUCK AWAY FROM D/L.

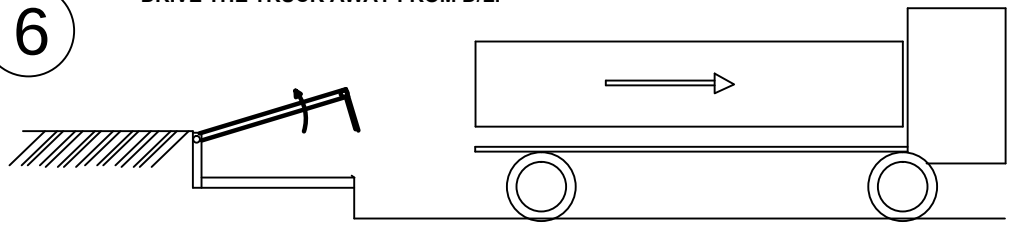

7

HOLD PLATFORM DOWN BUTTON .

LIP WILL BE PARKED TO ITS ORIGINAL POSITION.



OPERATING INSTRUCTION FOR DOCK- LEVELER.