

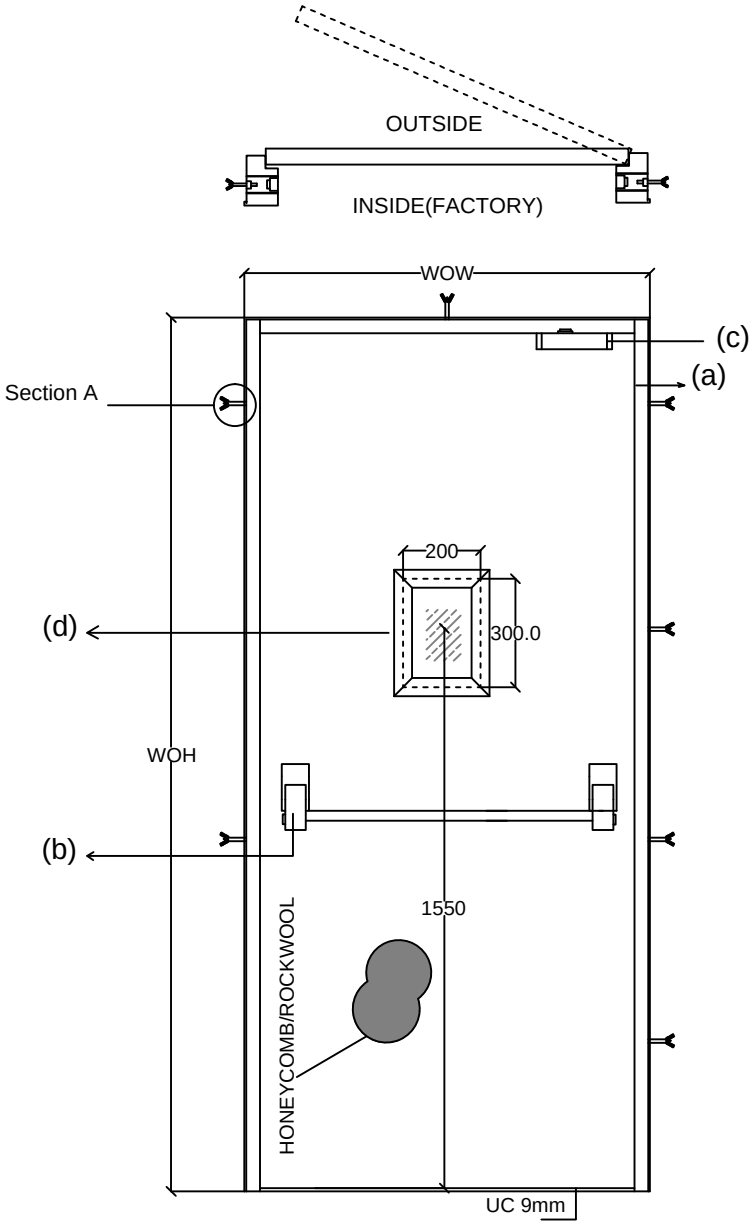


Inside Elevation



Top View

Abbrevation's:
WOW-Wall Opening Width
WOH-Wall Opening Height
UC-Under Cut
FFL-Finished Floor Level

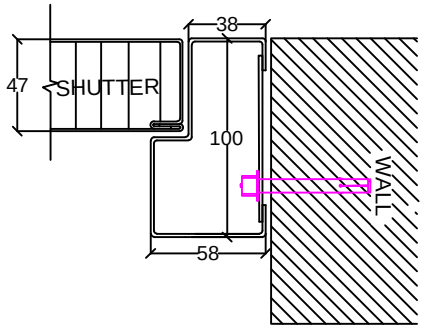

Detail view of Section A

ASSESORIES DETALES

(a) HINGES: SS Ball bearing butt hinges 100x75x3mm

(b) LOCK : Panic bar with external trim, mortise dead lock with half cylinder.

(c) DOOR CLOSER: F8500

(d) GLASS : 5mm Thk. Vision Glass of size 200x300mm.

Shutter thickness : 47 mm
Frame Sheet thick : 1.20mm
Shutter sheet thick : 0.80mm
Fixing : On Soliid Brick plasterd wall with Anchors

NOTE:- *All Dimensions are in mm.
*Tolerance:-All Linear Dimensions ±3mm,Others ±0.5mm.
*The Drawing Is For Location of Hardware only. Drawing Does Not Represent The Hardware For More Clarity, Please Go Through Hardware Broucher.

FIRE RATED EXIT DOOR					
SR. NO.	WOW	WOH	TYPE 3	QUANTITY	LOCATION
1	960	2130	1	1	SHOP ENTRY

COLOR- RAL 9006(White Aluminum)

This drawing & design is the property of NIHVA TECHNOLOGIES. Not be sold or copy to any other concern.

FIRE RATED EXIT DOOR

CLIENT APPROVAL

ALL DIMENSION ARE IN mm

	NAME	DATE	SIGN.
DRAWN	SURAJ	25/04/17	
CHECK	SAGAR P.	25/04/17	
REV.	0		
APPRD.			
MFG			

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:-www.nihva.com

CLIENT -
PROJECT -
SITE -
DWG. NO. - NIHVA/17-18/VDR/0017
SCALE: 01 | WT: | SHEET: 01 OF 01
If any queries contact : projects@nihva.com