



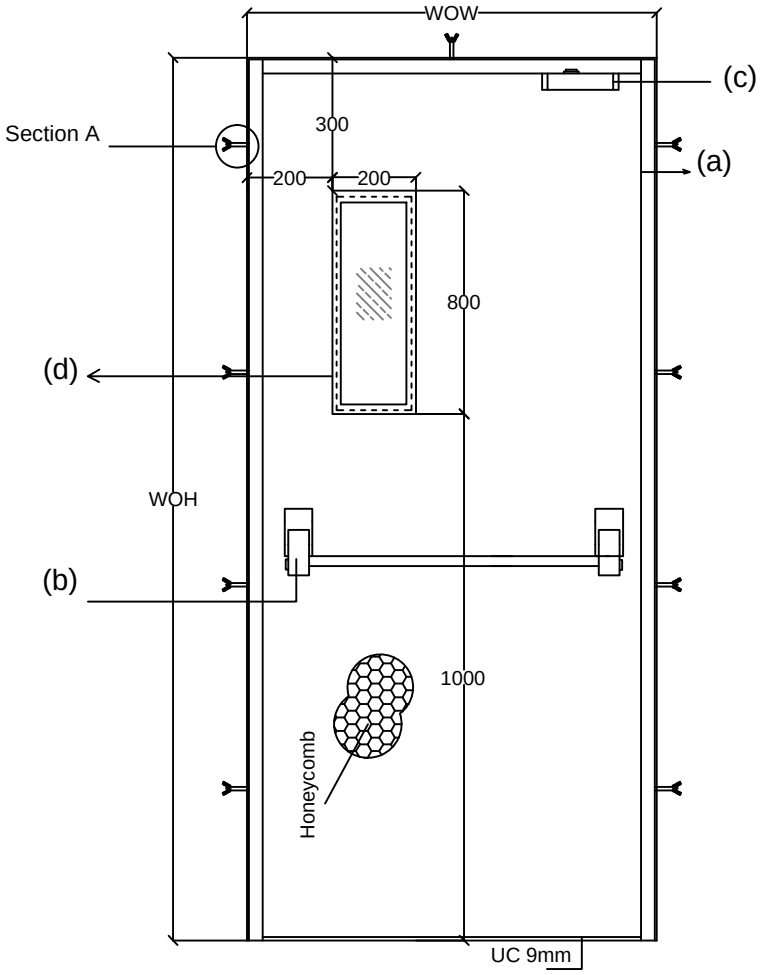


Elevation



Top View

Abbrevation's:
WOW-Wall Opening Width
WOH-Wall Opening Height
UC-Under Cut
FFL-Finished Floor Level

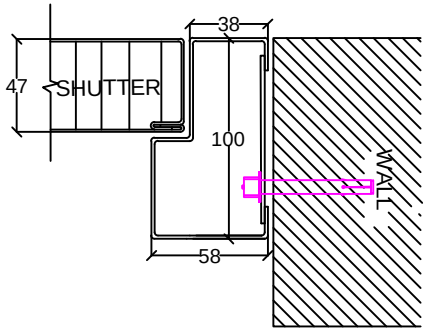

Detail view of Section A

ASSESORIES DETALES

(a) HINGES: SS Ball bearing butt hinges 100x75x3mm (iclean)

(b) LOCK : Panic Bar (iclean), Mortise lock with half cylinder External trim (iclean)

(c) DOOR CLOSER (iclean)

(d) GLASS : Single Glazed Vision size 200x800mm.

Shutter thickness : 47 mm
Frame Sheet thick : 1.20mm
Shutter sheet thick : 0.80mm
Fixing : On Soliid Brick plasterd wall with Anchors

NOTE:- *All Dimensions are in mm.
*Tolerance:-All Linear Dimensions ±3mm,Others ±0.5mm.
*The Drawing Is For Location of Hardware only. Drawing Does Not Represent The Hardware For More Clarity, Please Go Through Hardware Broucher.

DOOR TYPE	NOMENCLATURE	WOW	WOH	LOCATION	RO=TYPE 3	TOTAL
FIRE DOOR	1SD	1000	2100	GROUND FLOOR-GRID Y3TOY15	5	6
				FIRST FLOOR OFFICE STAIR	1	

COLOR - RAL 7035

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not be sold or copy to any other concern.

Fire Door

CLIENT APPROVAL

ALL DIMENSION ARE IN mm

	NAME	DATE	SIGN.
DRAWN	OMKAR	18/03/16	
CHECK	ANIL	18/03/16	
REV.	00		
APPRD.			
MFG			

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGY PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:-www.nihva.com

CLIENT - TAIIN STEEL FAB & INFRA PVT.LTD.
PROJECT - HYOSUNG T&D
SITE -
DWG. NO. - NIHVA/15-16/238
SCALE: 01 | WT: | SHEET: 01 OF 01
If any queries contact : projects@nihva.com