

Abbrevation's:
WOW-Wall Opening Width
FW-Frame Width
SW-Shutter Width
WOH-Wall Opening Height
FH-Frame Height
SH-Shutter Height
UC-Under Cut
FFL-Finished Floor Level

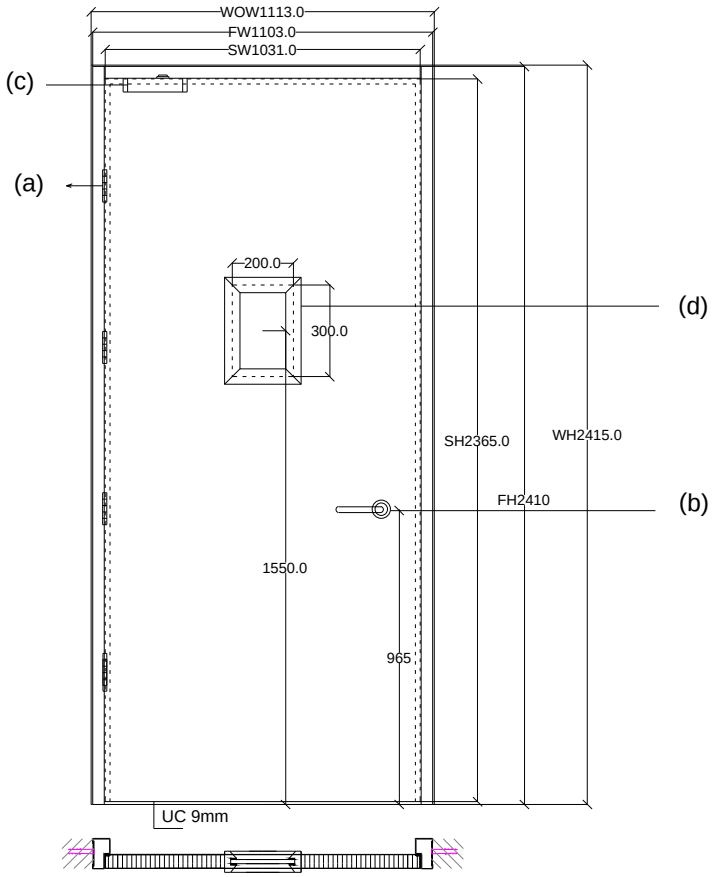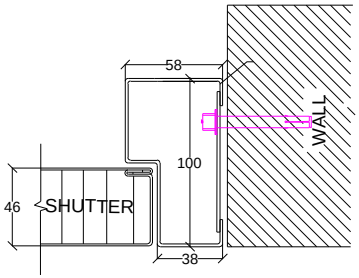


## ASSESORIES DETALES

DOOR QTY : 17 No.

(a) HINGES: 2 No. SS Ball bearing butt hinges 100x75x3mm

(b) LOCK : Mortise lock Withe Lever Handle

(c) DOOR CLOSER: 1 No. Door Colser TS 71 with std arm

(d) GLASS : 1No. Clear fire Vision Glass Clear 6mm of size 350x300mm.

(e) FLUSH BOLT : ----------

Shutter thickness : 46 mm
Frame Sheet thick : 0.80mm
Shutter sheet thick : 1.20mm
Fixing : On Soliid Brick plasterd wall with Anchors

NOTE:- *All Dimensions are in mm.
*Tolerance:-All Linear Dimensions ±3mm,Others ±0.5mm.
*The Drawing Is For Location of Hardware only. Drawing Does Not Represent The Hardware For More Clarity, Please Go Through Hardware Broucher.

| | |
|---|---|
| CLIENT : NIHVA TECHNOLOGIES PVT LTD | DRAWN BY : DILEEP |
| PROJECT : | CHECKED BY : XXXXXXXXXXXX |
| TITLE : Fire Exit Door | D R G. N O. : IHMS/GE2015/ 030 REV 0 |
| | DATE : 12/12/2015 |
| | NOT TO SCALE |