

DRAWING

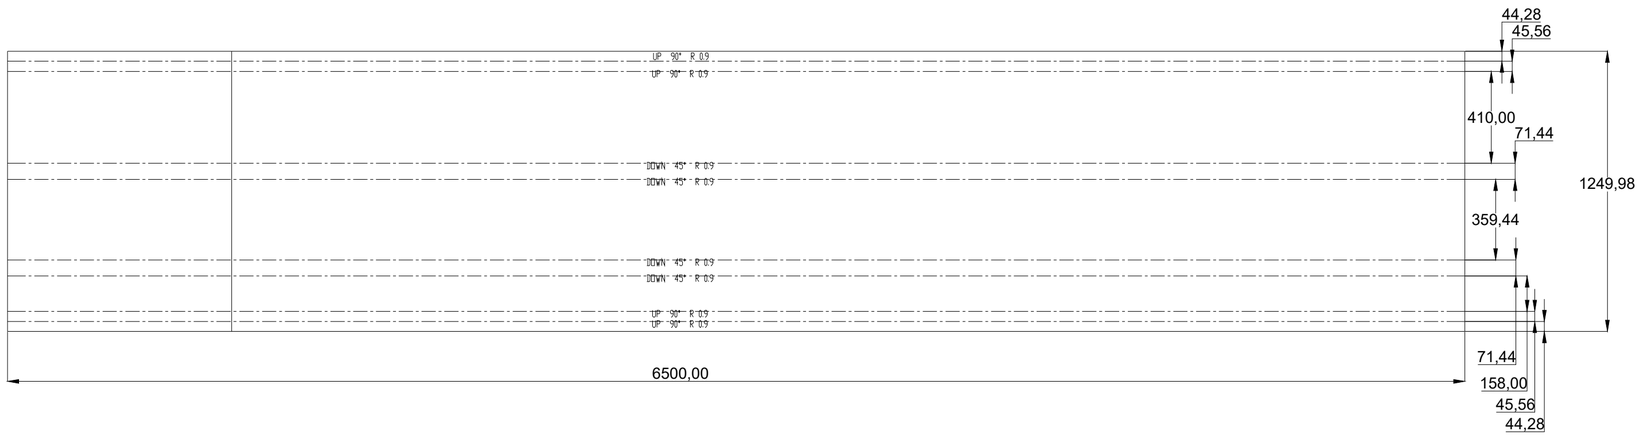


ARCEDGES _ Shutter Size W6000 x H6000 - 3nos
Name - Hood Cover (1250x0.9 mm)- 6500 MM L
Material - G.I.
Thk - 0.9 mm
QTY - 03 NOS

## TECHNICAL SPECIFICATION:-

| SR. | SPECIFICATION | DETAILS |
|---|---|---|
| 1. | DESCRIPTION & DRIVE | MOTORIZED ROLLING SHUTTER (INDIRECT DRIVE) |
| 2. | LOCATION AREA | INSIDE AREA / OUTSIDE AREA |
| 3. | MOUNTING SURFACE | SIDE BRACKETS: OPTIONAL = ON CONCRETE/STEEL&SIDE |
| 4. | SLAT | GI SLAT- 1.2MM THICK (75 MM WIDTH) |
| 5. | BOTTOM PROFILE | MS PLATE100 x 3.15 MM THICK WITH ANGLE 35X35X5 MM . |
| 6. | GUIDE PROFILE | M.S." T " SHAPED PROFILE 100X150X3 MM THICK. |
| 7. | HOOD COVER & MOTOR COVER | MADE OF GI SHEET THICKNESS 0.9 MM. |
| 8. | SURFACE FINISH | SYNTHETIC ENAMEL PAINT |
| 9. | PUSH BOTTON | 3 WAY PUSH BUTTON ON BOTH SIDE |

## SHUTTER SIZES :- (FOR MANUFACTURING COMPLEX)

| SR. | CLEAR WIDTH | CLEAR HEIGHT | QTY. |
|---|---|---|---|
| 01 | 6000 mm | 6000 mm | 03 |

| RIVISION. | DATE |
|---|---|
| REV 01 : SLAT THICKNESS CHANGE 1MM TO 1.2MM<br>BOTTOM PLATE THICKNESS CHANGE 2.5MM TO 3.15MM<br>ANGLE STIFFENER CHANGE 35X35X3 MM TO 35X35X5 MM | 03-12-2025 |

NOTE-
1. ALL CIVIL WORK WILL BE CLIENT'S SCOPE.
2.IF STRUCTURE REQUIRED FOR SHUTTER IS IN CLIENT'S SCOPE.

NOTE :
GALVANISATION SHALL BE MIN 230 g/SQ.M
PUSH BUTTON BOTH SIDE

SPECIAL INSTRUCTION'S :

TITLE - DOOR AUTOMATION

DWG NO - NTPL- 300-PM-01

NIHVA TECHNOLOGIES PVT.LTD.PUNE
Website - www.nihva.com

| | NAME | SIGNATURE | DATE | | |
|---|---|---|---|---|---|
| DRAWN | V.W. | | 08-12-2025 | PROJECT NO - NTPL- 300 | REVISION - 01 |
| CHK'D | B.S. | | 10-12-2025 | SITE LOCATION-GUJARAT | WEIGHT - 77 kg |
| APPV'D | V.T. | | 10-12-2025 | MATERIAL - MS | QTY - 03 NOS |
| IF ANY QUERIES CONTACT - Design@nihva.com | | | | PROJECTION METHOD | SCALE : |
| ALL DIMENSIONS ARE IN 'MM' | | | A2 | | SHEET 1 OF 1 |

PRODUCT - MOTORIZED ROLLING SHUTTER