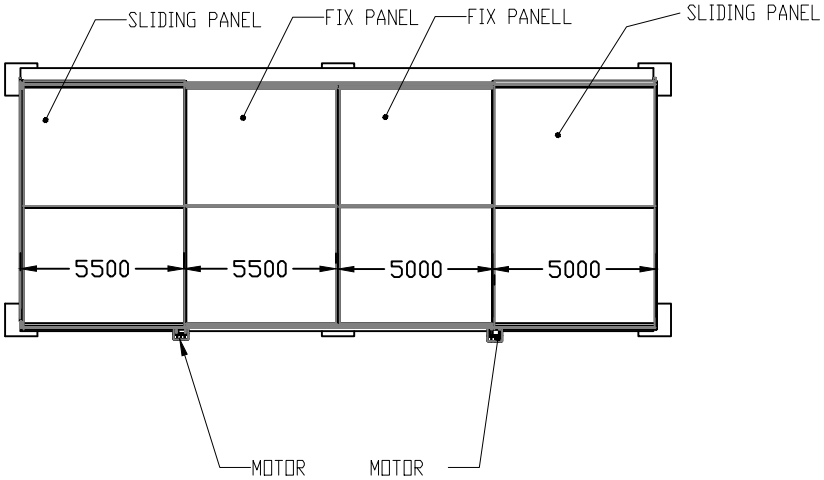

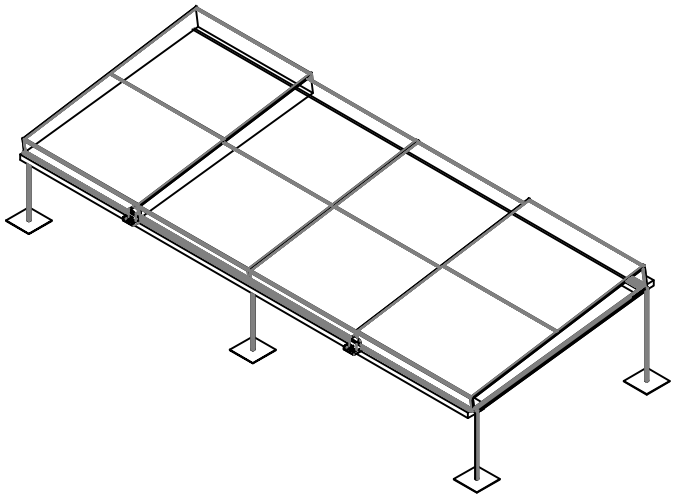

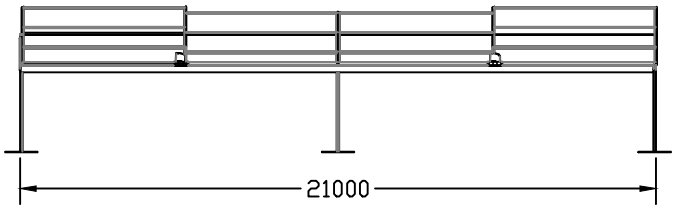



CLOSE POSITION

NOTE
1. THE STRUCTURE/ PARAPET AROUND THE CUT OUT SHOULD BE OF FLAT SURFACE FOR PROPER FASTENING OF ROOF.
2. TOP SURFACE SHOULD BE OF PARALLEL / FLAT FOR SMOOTH FUNCTIONING OF ROOF.
3. ROOF EXTENSION IS SHOWN FOR ONLY REFERENCE. IT CAN BE MODIFIED AS PER THE WORK UNDERTAKEN.
4. GRADIENT OF 50MM X 60 MM NEED TO BE PROVIDED ALONG THE OUTER LENGTH TO AVOID WATER STAGNANCY IN GUIDE RAIL.
5. AL PROFILE - POWDER COATED
6. GASKET - EPDM
7. MOTOR - ITALIAN/GERMAN MAKE
8. ELECTRICAL REQUIREMENT -
9. ALL DIMENSION IN MM.
10. ALL CIVIL WORK ARRANGEMENT IS IN CLIENT SCOPE.

NOTE - THIS IS CONCPETIUL DRAWING ONLY FOR STUDY PURPOSE

TITLE - PROPOSED PLAN LAYOUT				NIHVA TECHNOLOGIES PVT.LTD.PUNE Website - www.nihva.com
	NAME	SIGNATURE	DATE	CLIENT -
DRAWN	D.V.		25.07.2023	PRODUCT - RETRACTABLE ROOF
CHK'D	P.M.		25.07.2023	SITE LOCATION -
APPV'D	V.T.		25.07.2023	
if any queries contact - supportautomation@nihva.com				REVISION - 0
ALL DIMENSION ARE IN mm		A3		SCALE - 1.1 SHEET 1 OF 1