
Rolling Shutters:-
The widespread and broadly used amongst all the categories of doors is the motorised Rolling shutter

Rolling shutter:-

Single Wall Rolling Shutter:-

❖ Motorized & Non motorised.

- M.S / Galvanised Rolling shutter.
- Grilled Rolling Shutter.
- Stainless Steel Rolling shutter.
- Transparent Rolling shutter.

Double Wall Rolling Shutter:-


❖ Motorized & Non motorised.

- Galvanised Iron Rolling shutter.
- Aluminium Insulated Rolling Shutter.
- Aluminium Non-Insulated Rolling Shutter.


Single Wall Slat



Double Wall Slat

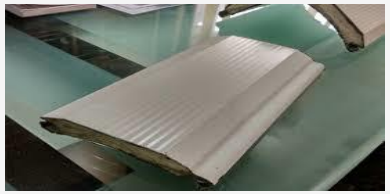


Perforated Slat

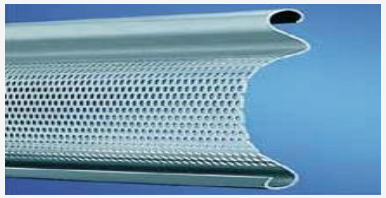

Motorized



Direct Drive



Indirect Drive



Non – Motorized
(Gear Operated & Manual)



Why Rolling shutter ?

The shutters are widely used across the market for both commercial and residential use.

It is designed as a cost effective measure to prevent entry and to enhance security levels as opposed to grills and doors.

All shutters are light and easy to handle. It is ideal for shop fronts, garage openings, small and

ow-value warehouses, stairwell opening and car parks.

It is designed to withstand normal wear and tear from rain and dirt, long term durability and high volume usage.






Technical specifications for Rolling shutter

Door type	**Rolling Sutter**
Clear Opening dimension	W)..... x (H) ..... std. dimension or non. std. dimension
Opening Direction	Vertical - from bottom to Top
Mounting Location area	Inside area
Mounting Surface	Side Brackets: Optional = On Concrete /Steel & Side Guides : Optional = On Concrete/Steel / Masonry
Opening/Closing Speed	0.1 m/sec
Door Material	
Curtain material	GI/MS/AL
Curtain Panel	The panel made of 1.0mm thick CRCA steel
Curtain panel size	75 – 150 mm wide
Curtain Profile	Curved/Flat
Slat Thickness	0.9 mm to 1.2 mm (As per IS 6248)
Bottom Profile	M. S. Plate 100 mm x 2.5 mm thick with angle stiffener
Side Guide Profile	M.S." U" Shaped profile 65 mm -150 mm x 3 mm thick (as per the opening width dimension)
Roller Shaft	M.S. Tubular Pipe with Flange & machined shaft at the ends Pipe Dia -100 to 300 mm as per w x h
Side Brackets	MS Plate 3 mm to 10 mm thick , as per the opening dimension
Hood Cover	Made of GI Sheet Thickness 0.8 mm with 25x25x3mm angle stiffener
Surface finish	
Painting	2 Coats (each coat of 35 microns DFT) of EPOXY polyamide based enamel finish of approved color and make over a Coat (each one coat 25 microns DFT) of EPOXY polyamide based red oxide zinc phosphate primer
Options Available	Perforation in Slat Profile / Rolling Grill
Automation	
Control Type	Optional = Dead man / Pulse Control
Drive Unit & Mounting Type	Option 1) Electric Motor (Imported German Make) (Single Phase/Three Phase) - Direct Mounting on Shaft Option 2) Electric Motor (Imported China make) (single phase / three phase) - Indirect Mounting - Sprocket chain arrangement

1 MS Rolling shutter:-



1A. Features:-

- ✓ Slat thickness 1 mm .
- ✓ Slat Material MS as per the requirement
- ✓ Slat Profile Curved.
- ✓ Perforation available in all above profiles
- ✓ Bottom Profile MS Plate
- ✓ Optional - Bottom Rubber Sealing
- ✓ Side Guide MS Plate
- ✓ Hood Cover GI Plate
- ✓ Brackets and Roller Shaf. Mild steel
- ✓ Surface Finish Natural MS Finish

2 Aluminum Rolling shutter:-



2A. Features:-

Motorised and Non-motorised method of closure

- ❖ Optional Features:
- ✓ Air pressure safety bottom sensor
- ✓ Powder coated wood effect
- ✓ Wireless remote control
- ✓ Guide silencer strips

2B. Specifications:-

- ❖ Optional features include:
- ✓ Powder coated
- ✓ Air pressure safety bottom sensor
- ✓ Extra upper limit safety switch
- ✓ Steel wind lock at both ends
- ✓ Wireless remote control
- ✓ Stainless steel guides
- ✓ Guide silencer strips
- ✓ Up to 7000mm (Width) x 6000mm (Height)

3 Galvanised Iron Rolling shutter:-



3A. Features:-

- ✓ Slat thickness 1 mm .
- ✓ Slat Material GI as per the requirement
- ✓ Slat Profile Curved.
- ✓ Perforation available in all above profiles
- ✓ Bottom Profile MS Plate
- ✓ Optional - Bottom Rubber Sealing
- ✓ Side Guide MS Plate
- ✓ Hood Cover GI Plate
- ✓ Brackets and Roller Shaf. Mild steel
- ✓ Surface Finish Natural MS Finish

4 Transparent Rolling shutter:-



The most popular and widely used amongst all the categories of doors is the Transparent Rolling Shutter The symbolic feature of our Transparent Rolling Shutter is its robust structure obtained due to the use of high strength metals in the making of slate and guide profile. This feature acts as a shield and protection against burglary, vandalism & storms

4A. Features:-

- ✓ Mounting Location- Vertical
- ✓ Heat Insulation-Inside
- ✓ Mounting Surface-Concrete, Steel
- ✓ Opening/Closing Speed-0.05m-0.1m/sec

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

NIHVA – Major Client List

Automobile

TATA MOTORS
Mercedes-Benz
Mahindra
FIAT
NISSAN
BAJAJ

Industrial

SANDVIK
PARKER
EPCOAT
BEKAERT
eisenmann
FINEARC SYSTEMS
KONECRANES
EATON
faurecia
ATS Group
SKF
PMP INDUSTRIES
Stanley Black & Decker
MAGNA COSMA INTERNATIONAL
FUKOKU
SIEMENS
Atlas Copco
ROSS
SIGNODE
TAKENAKA INDIA
JELLY
TATA TOYO
WF
SULZER
GIFT
ALSTOM
RAWAT
IR
GE
WILO
Mather + Platt
TATA
adani
ZF INDIA
BOSCH
Invented for life
DUPONT
BASF
SEIL
SKIPPER
RELIANCE

Food

Puratos
COLGATE-PALMOLIVE
FERRERO
Haldiram's
INBISCO
INBISCO
BARRY CALLEBAUT
Nestle
MARS

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

Pharmaceuticals:

LUPIN
ajanta pharma limited
Abbott
A Promise for Life
Emcure
Success through Innovation

Contractor / PEB

Shapoorji Pallonji
SAMARTH GROUP
Kalbhor Group
REWARD
KHAMKAR CONSTRUCTIONS PVT. LTD.
PHOENIX INFRA
TRUTH IS OUR ORNAMENT
PHOENIX INFRA ESTATE INTERNATIONAL LTD.
ZAMIL STEEL
iVRCL
ROHAN
M/s.Sandip Nanavati
ADITYA CONSTRUCTIONS
SHMZ
Chitale Constructions
NYATI GROUP

Architects / PMC

CRN
VMS
Venkataramanan Associates
ARCHIVISTA
ARCHICON
Simplifying Spaces
snpc
SHAH & TALATI
Engineering & Architecture
JLL
synefra
SMPS
CONSULTANTS LLP
CONSULTANTS TO INDUSTRY
ICL
PHENIX
Creative Simplified
Knight Frank

Jewellery & Fashion

SWAROVSKI

Thank You !!!!

www.nihva.com

NIHVA

NIHVA Technologies Pvt. Ltd.