

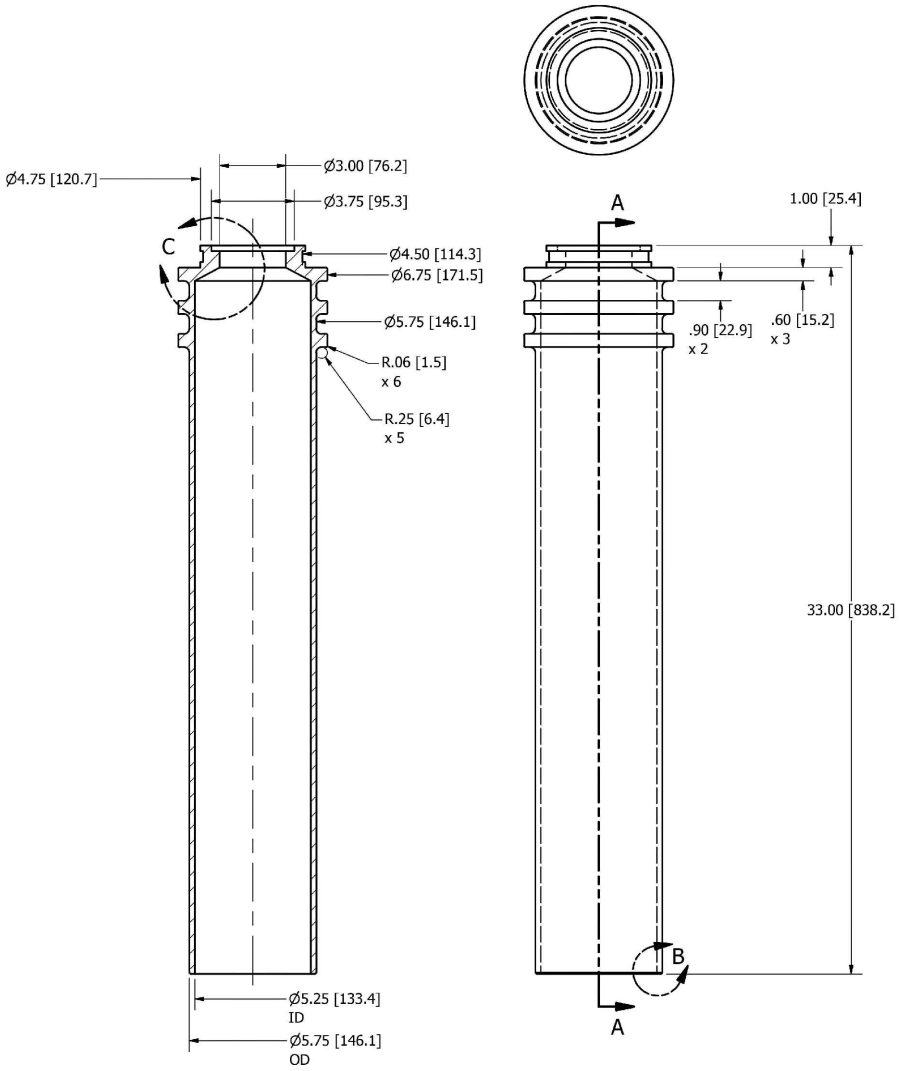



SECTION A-A



DETAIL C

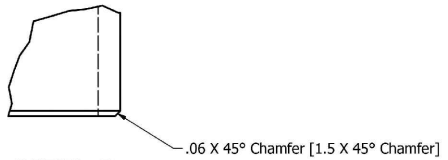

DETAIL B

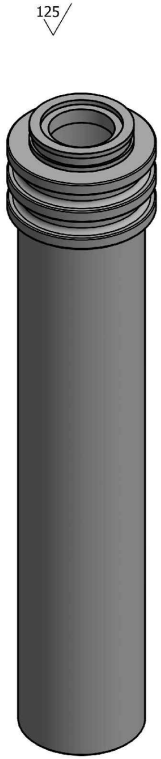

Notes:
1) Material: Ductile Iron ASTM A536 Grade 65-45-12
2) Clean and deburr, remove all sharp edges
3) Entire exterior surface must be machined, no voids/cracks allowed
4) Max. exterior surface roughness 125 micro inches

UNLESS OTHERWISE SPECIFIED: DIMEMSIONS ARE IN INCHES	DESIGN	2014-06-26
TOLERANCES: ANGULAR: MACH ± 0.5° BEND ±1° THREE PLACES DECIMAL: ± 0.010 TWO PLACES DECIMAL: ± 0.050 ONE PLACE DECIMAL: ± 0.100	ENGINEER	2014-06-26
	VERIFY	2014-06-26
	APPROVED	2014-06-26

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

TITLE

Bollard Base R-7501-B7

SIZE		DWG NO	REV
C		0269	B1

SHEET 1 OF 1