

HYD CYL - Ø50 (Bore) X 35(Rod)X 426 (Stroke length) (Single Acting)

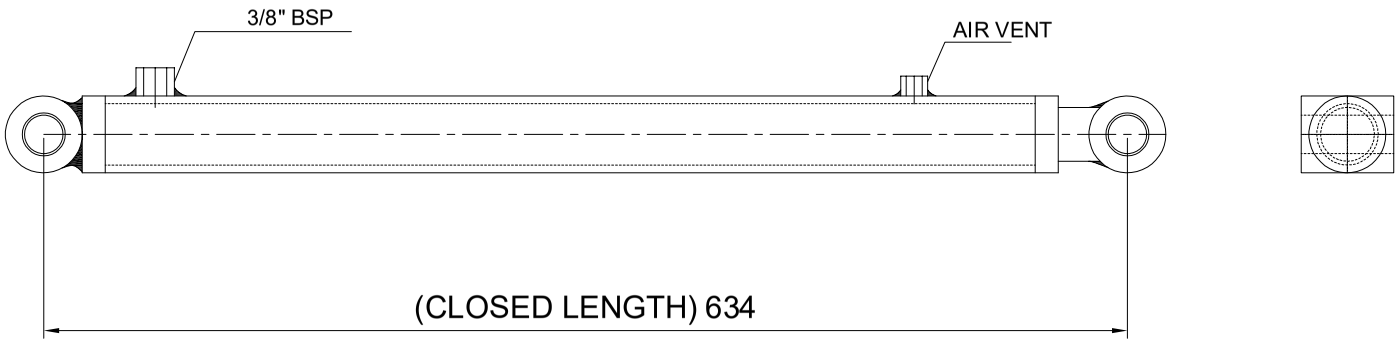

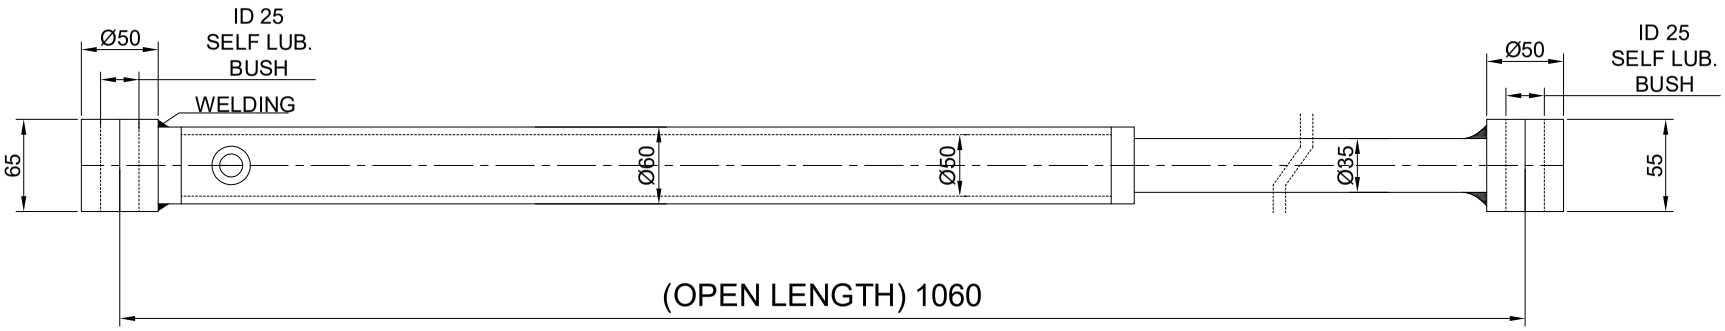

SPECIFICATION :-

- BORE :- Ø50mm
- STROKE :- 426 mm
- PISTON ROD :-Ø35mm
- MOUNTING :-BOTH END CLEVIS
- MEDIUM :-HYDRAULIC OIL
- DESIGN :-WELDED TYPE.(SINGLE ACTING)
- BOTH END PORT CONNECTION :-3/8" BSP
- WORKING PRESSURE :- 200 BAR.
- OPERATING TEMPERATURE :-20 'C TO 100'C (DEPENDING ON SEAL)
- MAX RECIPROCATING SPEED :-12m/min
- STROKE TOLERANCE :-0 TO +1mm
- CYLINDER COATED WITH ONE COAT OF GRAY PRIMER AND ONE COAT OF PAMPAC GRAY PAINT

QUANTITY- 08 NOS

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE			NIHVA TECHNOLOGIES PVT. LTD. PUNE
DECK CYLINDER			Tel : 020 66304033 Email:- info@nihva.com Website:- www.nihva.com
	NAME	DATE	
DRAWN	SUJATA	17/04/2023	CLIENT - NIHVA TECHNOLOGIES PVT LTD
CHECK	A.K	17/04/2023	PROJECT -DL
APPRD.	V.T	17/04/2023	SITE LOCATION - PUNE
If any queries contact : design1@nihva.com			DWG. NO. : NIHVA/23-24/VDR/0122 / REV- 0
ALL DIMENSION ARE IN mm			SCALE: NTS / WT: / SHEET: 01 OF 01