

HYD CYL - Ø50 (Bore) X 25(Rod)X 140 (Stroke length) (Single Acting)

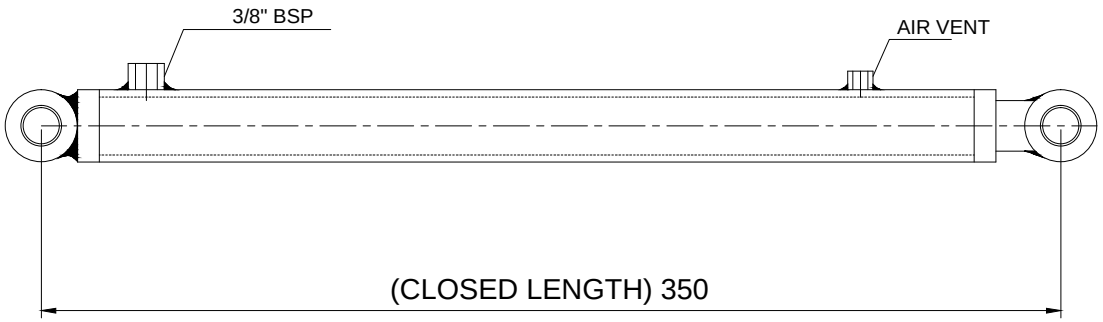

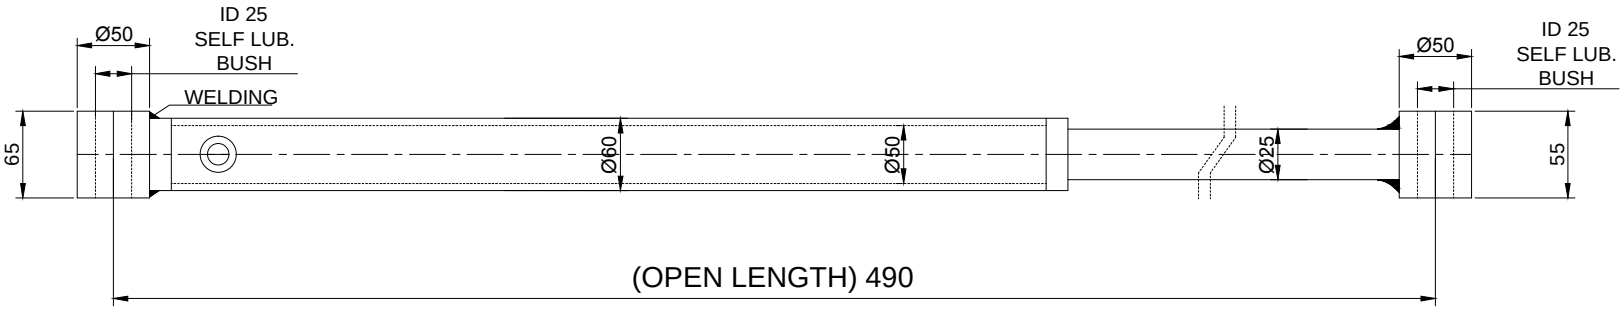

SPECIFICATION :-

- BORE :- Ø50mm
- STROKE :- 140 mm
- PISTON ROD :-Ø25mm
- MOUNTING :-BOTH END CLEVIS
- MEDIUM :-HYDRAULIC OIL
- DESIGN :-WELDED TYPE.(SINGLE ACTING)
- BOTH END PORT CONNECTION :-3/8" BSP
- WORKING PRESSURE :- 160 BAR.
- OPERATING TEMPERATURE :-0 'C TO 50'C (DEPENDING ON SEAL)
- MAX RECIPROCATING SPEED :-12m/min
- STROKE TOLERANCE :-0 TO +1mm
- CYLINDER COATED WITH ONE COAT OF GRAY PRIMER AND ONE COAT OF PAMPAC GRAY PAINT

QUANTITY- 1 NO

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE				
LIP CYLINDER				NIHVA TECHNOLOGIES PVT. LTD.
	NAME	SIGN	DATE	
DRAWN	P.A		12.12.18	CLIENT -
CHECK	P.A		12.12.18	PROJECT - DLAG1010
APPRD.	P.A		12.12.18	SITE LOCATION -

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

If any queries contact : design@nihva.com	DWG. NO. :NIHVA/18-19/VDR/276		REV- 0
ALL DIMENSION ARE IN mm	SCALE: NTS	WT:	SHEET: 01 OF 01