


DRAWING

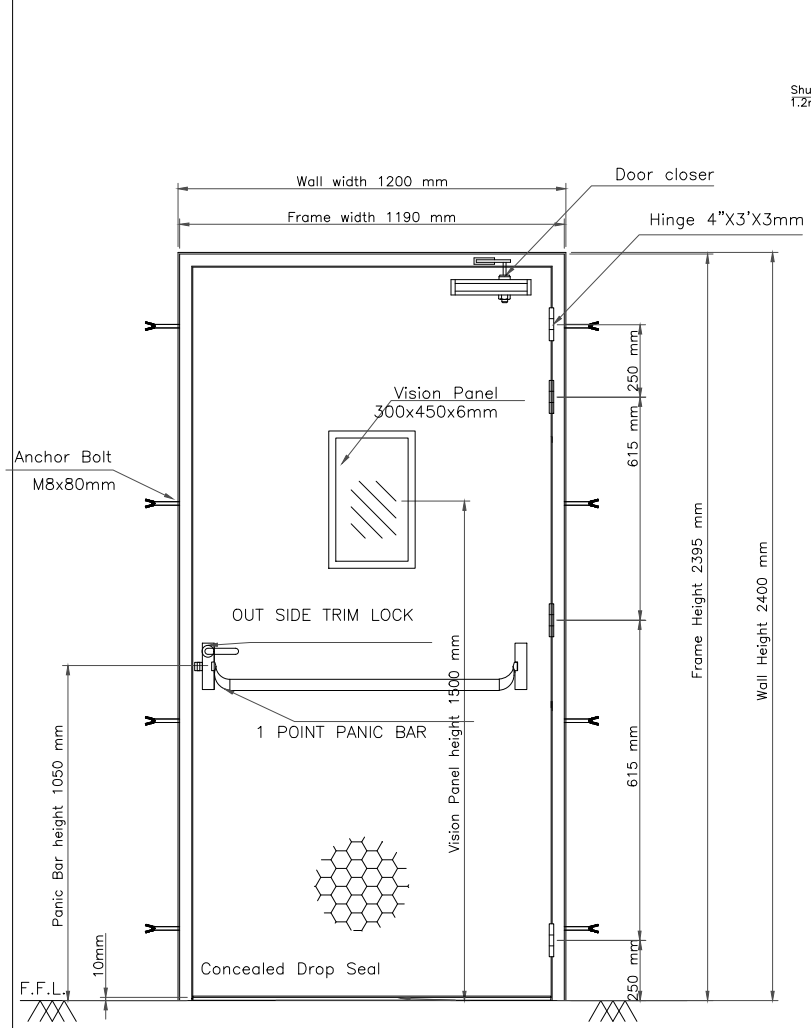

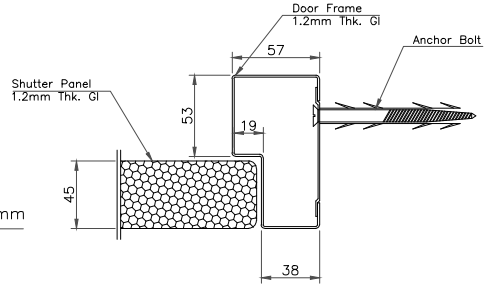

Section S1–S1
Frame Details



HANDING DETAILS

LHR	Inside / Outside key	LEFT HAND REVERSE
RHR	Inside / Outside key	RIGHT HAND REVERSE

NOTES :–

Frame Joint Type :– Bolted joint

Frame Profile(DxH):– 100 x 57mm.

RAL Shade Code :– RAL

Infill :– Honey Comb

Type :– 2Hr un–insulated door as per IS 3614–2021

Hardware/Accessories Description

1. SS BB Hinges "4x3x3"–Geze
2. Door Closer Std Arm – Geze TS 1000
3. Single Point Panic Bar– Geze
4. External trim with half EPC – Geze
5. 2 Hr.Fire Rated Vision Glass 300 x 450mm
6. Concealed Drop Seal
7. Door Stopper

SINGLE LEAF DOOR

NOTE :

LOCATION :

	WH01A		WH01B		WH02		WH03		WH04		TOTAL
	LHR	RHR	LHR	RHR	LHR	RHR	LHR	RHR	LHR	RHR	
	1 NOS	1 NOS	0 NOS		1 NOS	0 NOS	1 NOS	0 NOS	1 NOS	1 NOS	6 NOS

TITLE - DOOR AUTOMATION				NIHVA TECHNOLOGIES PVT.LTD.PUNE Website - www.nihva.com
DWG NO - NTPL-308-PM-01				
	NAME	SIGNATURE	DATE	PRODUCT - FIRE RATED DOOR
DRAWN	J.P.		10-12-2025	PROJECT NO - NTPL- 308 REVISION - 01
CHK'D	B.S.		10-12-2025	SITE LOCATION - CHENNAI
APPV'D	V.T.		10-12-2025	MATERIAL - QTY - 15
IF ANY QUERIES CONTACT - Design@nihva.com				PROJECTION METHOD SCALE :
ALL DIMENSIONS ARE IN 'MM'		A2		SHEET 1 OF 1