www.tgpsystems.com

Offer Date: 03/12/2024

Offer No: T533

Project: Requirement of Motorized Guillotine Window

Subject: Guillotine System Sbs

Dear Pranav Marne

TGP Systems offer is **22514.17** This offer includes below mentioned features and quantities.

Currency Type USD

Poz No	Description	W mm	H mm	L mm	W ft	H ft	L ft	Qty	Unit	Unit Prices	Total Price
1	**GUILLOTINE WINDOW SBS (2+1)**	2197	3360		7.21	11.02		1.00	Pcs	2292.66	2292.66
Glass : *24 mm - 4 mm Clear Float Glass + 16 mm Air G + 4 mm Clear Float Glass* ***Packing :*** *Will be dispatched in special designed crate* ***Motor :*** *Becker -120* ***R/C :*** *Becker Group of 16*											
2	**GUILLOTINE WINDOW SBS (2+1)**	3200	3360		10.50	11.02		2.00	Pcs	2713.27	5426.53
Glass : *24 mm - 4 mm Clear Float Glass + 16 mm Air G + 4 mm Clear Float Glass* ***Motor :*** *Becker -120*											
3	**GUILLOTINE WINDOW SBS (2+1)**	2520	3360		8.27	11.02		2.00	Pcs	2421.33	4842.65
Glass : *24 mm - 4 mm Clear Float Glass + 16 mm Air G + 4 mm Clear Float Glass* ***Motor :*** *Becker -120* ***Note :*** *(W : 5041 mm) Since this crossing the maximum product width, it is design in 2 parts.*											
4	**GUILLOTINE WINDOW SBS (2+1)**	1592	3380		5.22	11.09		1.00	Pcs	2041.53	2041.53
Glass : *24 mm - 4 mm Clear Float Glass + 16 mm Air G + 4 mm Clear Float Glass* ***Motor :*** *Becker -120*											
5	**GUILLOTINE WINDOW SBS (2+1)**	3340	3380		10.96	11.09		1.00	Pcs	2771.83	2771.83
Glass : *24 mm - 4 mm Clear Float Glass + 16 mm Air G + 4 mm Clear Float Glass* ***Motor :*** *Becker -120*											
6	**GUILLOTINE WINDOW SBS (2+1)**	1900	3360		6.23	11.02		1.00	Pcs	2168.54	2168.54
Glass : *24 mm - 4 mm Clear Float Glass + 16 mm Air G + 4 mm Clear Float Glass* ***Motor :*** *Becker -120*											
7	**GUILLOTINE WINDOW SBS (2+1)**	2435	3360		7.99	11.02		1.00	Pcs	2390.44	2390.44
Glass : *24 mm - 4 mm Clear Float Glass + 16 mm Air G + 4 mm Clear Float Glass* ***Motor :*** *Becker -120*											
8	**PACKAGING**							2.00	PCS	250.00	500.00
9	**Customs Charge**							1.00	PCS	80.00	80.00
								TOTAL		USD	22514.17

Offer validity is 7 days

1- Delivery

Price are EXW ISTANBUL

2- Payment

Payment in Advance to below account

ACCOUNT NAME: MERS YAPI MALZEMELERI SANAYI VE TICARET A.S.
TURKIYE IS BANKASI MERTER BRANCH ISTANBUL - TURKEY
BRANCH CODE : 1156 ACCOUNT NO : 590180
IBAN : TR08 0006 4000 0021 1560 5901 80 SWFT CODE: ISBKTRISXXX

3- Delivery Schedule

The estimated delivery time (ready for loading) is 30 days after the receipt of the payment

• The dimensions have been calculated according to the details on the form

• The goods will be delivered as unmounted.


• If you need montage help from our team, all expenses (visa-plane ticket-accomodiation) will be covered from you. Daily cost for one technician is 250 Usd / day.

• Or you may send one of your technician to our facilites so that we can train him in Istanbul.

4- Warranty

1 - The goods will be delivered as in the below drawings with the requested dimensions that both parties are agreed on. The state of the above technical specifications in accordance with the reference inquiry form. We guarantee the above-mentioned characteristics for a period of 2 years (as of the production date), only applies if the product has not been damaged as a result of exterior contact, either mechanical or chemical, and if it has been stored in good conditions in its original packaging. TGP does not, in any case, guarantee any damage resulting from the installation. We strongly advise our installers to take on decennial liability insurance to cover the installation

2- TGP reserves the right to examine the damaged goods. If required, the claimant is obliged to return the articles to TGP. Should certain products no longer conform to the two above-mentioned points, TGP will bear only the expenses for the replacement product, but will not, in any case, bear the costs of dismantling the defective product, or reinstallation, nor any other direct or indirect expense.

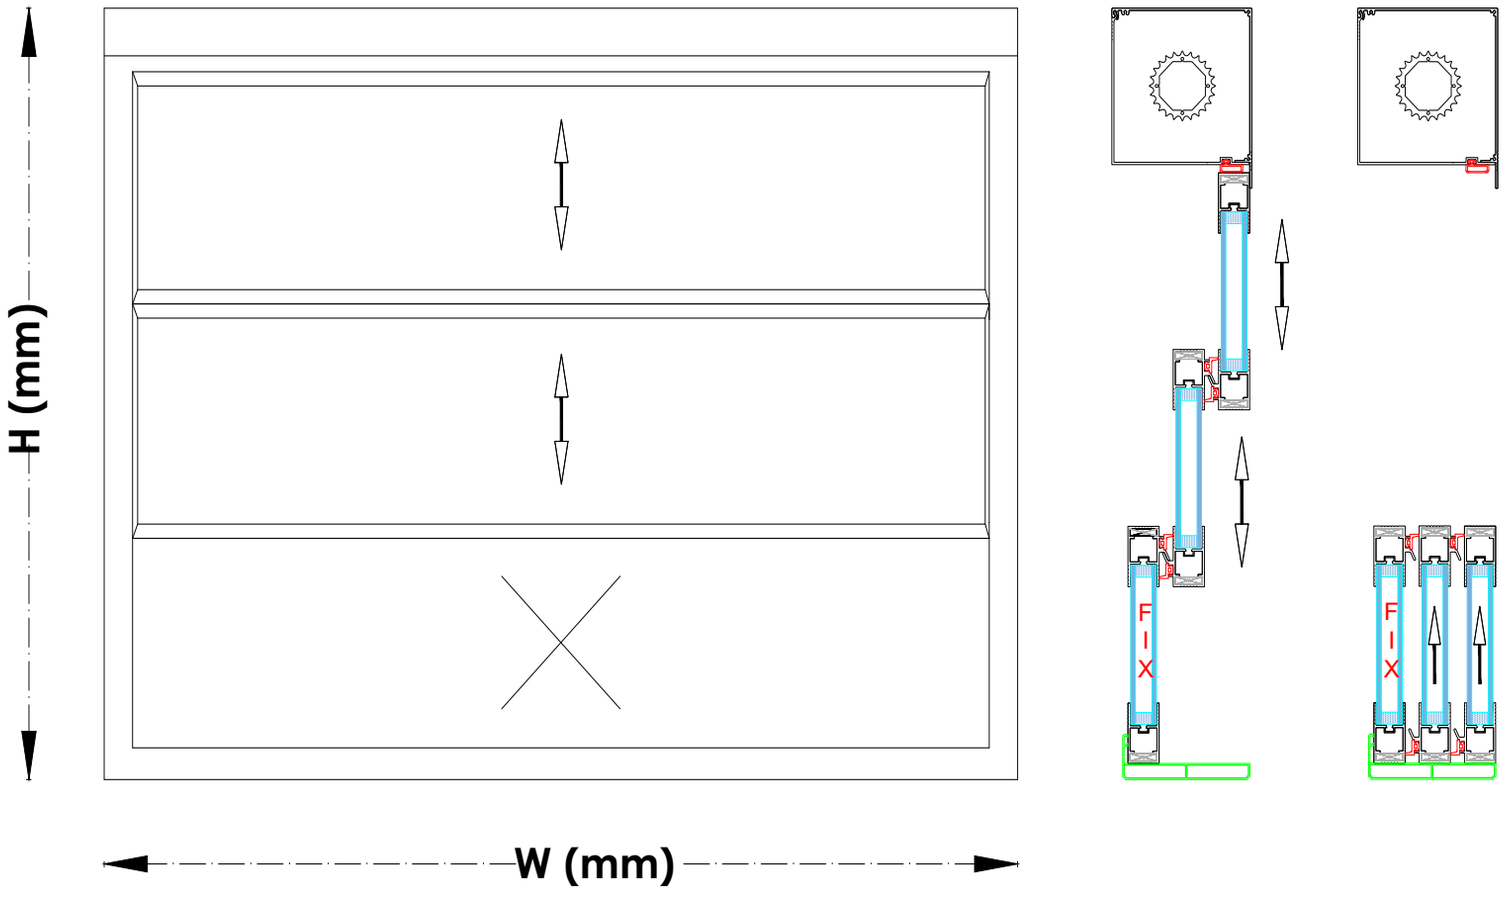

1 Fix + 2 Mobile


SBS Standart Bottom Stationary

Profiles: NOT thermal insulated.
Glazing: 20 mm glass (double) or 8 mm (single glass) is available.
Dimension: max 4000mm W x2500mm H or max 3500mm Wx3000mm H
Available Schemas: A,B,C,D
Protection: Hand protection profile
Insulation: Brush,
Color: All colors available in Ral Color Chart
Motion: Belt
Motor: 230 V/50 Hz. (For countries with different voltage values, we have a no-motor shipping option.)
Note: We are able to go wider or higher dimension. Please feel free to contact for TGP Systems technical staff advices.

Performance Calculation Results

Outside

Inside



Interior Angle 90°

Layers – From Outside to Inside		mm
L1	Clear Float Glass	4
L2	Cavity (100% Air)	16
L3	Clear Float Glass	4

Outer Pane : 4 mm Clear Float Glass
Cavity : 16 mm 100% Air
Inner Pane : 4 mm Clear Float Glass

Daylight Properties (EN 410)

Daylight Transmittance	:	82%
Daylight Reflectance Outdoor	:	15%
Daylight Reflectance Indoor	:	15%
Color Rendering Index (Ra)	:	98

Solar Energy Properties (EN 410)

Total Solar Energy Transmittance Solar Factor / g	:	78%
Solar Energy Direct Transmittance	:	74%
Solar Energy Reflectance Outdoor	:	13%
Solar Energy Absorption	:	13%
Shading Coefficient	:	0.90
UV Transmission	:	53%

Thermal Conductivity (EN 673)

U Value W/(m²K)	:	2.7

Sound Insulation Values

Rw (C, Ctr)	:	30 dB (-1, -3)

"Daylight" and "Solar Energy" properties are calculated using spectral measurements in compliance with EN 410:2011. "U-value" is calculated according to EN 673:2011.

The emissivity measurements used for calculations comply with EN 673:2011 (Annex A) and EN 12898:2019. Thermal stresses or building codes may require the use of heat-treated glass. This document is not an evaluation of the risk of glass breakage from thermal stresses. Please contact Sisecam Flat Glass to ensure the correct form of glass to be supplied for the structure.

Sisecam Flat Glass cannot guarantee the applicability of the calculated combinations.

Data on acoustic parameters such as "Weighted Reduction (Rw)" and "Spectrum Adaption Terms C / Ctr" are specified based on estimations determined as the best result for this glazing composition and have not been tested. Performance on-site can be different, related to the sizes of the glazing, frame design, noise sources, etc.

Technical and other data are based on information available at the time of preparation of this document and are subject to change by Sisecam Flat Glass without notice.

This document is only for informational purposes. Sisecam Flat Glass cannot be held responsible for any deviations between the presented data and the conditions on the site. Please contact your sales representative about whether the products you use in the calculation are available in our stock, whether they can be selling to your region, and the production time.