



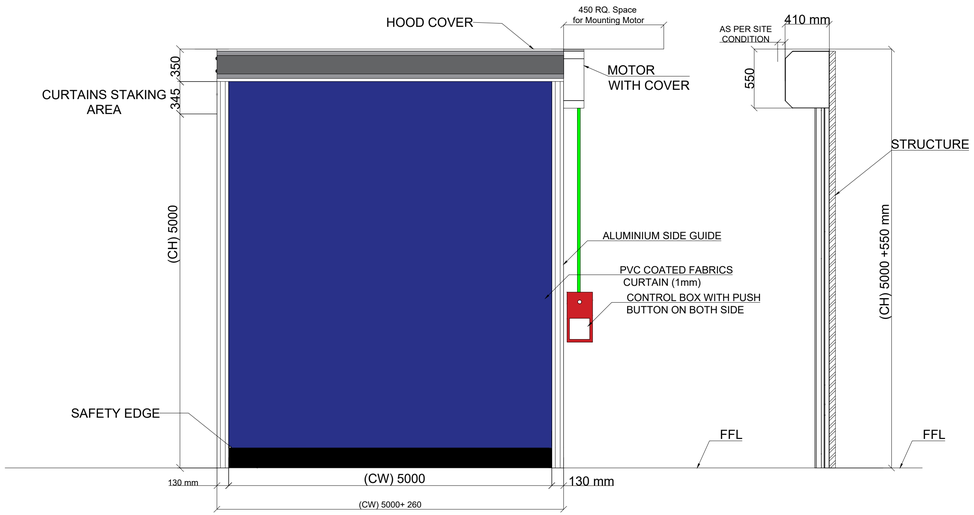




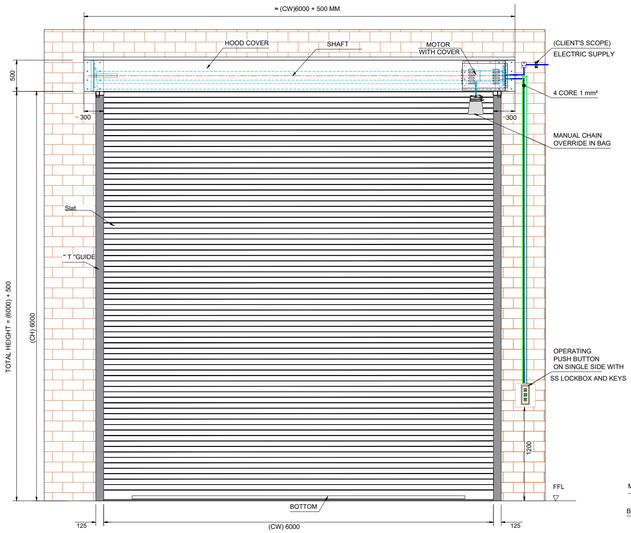



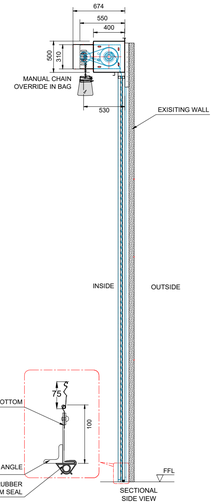

TECHNICAL SPECIFICATION ROLLING SHUTTER :-

SR.	SPECIFICATION	DETAILS
1.	SLAT	75 MM GALVALUME STEEL - 1 MM THK
2.	BOTTOM PROFILE	MS PLATE 100 x 2.5 MM THICK WITH ANGLE STIFFENER
3.	GUIDE PROFILE	M.S." T " SHAPE PROFILE 65 MM -150 x 3.0 MM THICK.
4.	HOOD COVER & MOTOR COVER	MADE OF GI SHEET THICKNESS 0.9 MM
5.	COLOR	RED OXIDE WITH COLOR

TECHNICAL SPECIFICATION HIGH SPEED DOOR :-

1.	CURTAIN	PVC FABRIC THICKNESS 1 MM
2.	GUIDE MATERIAL	ALUMINUM
3.	OPENING SPEED	UPTO 1.5 M/S
4.	CLOSING SPEED	0.8 M/S
5.	HOOD COVER & MOTOR COVER	GALVALUME STEEL
6.	EMERGENCY	CRANK HANDLE

NOTE :- ON THE SHUTTER GUIDE,WE ARE INSTALLING AN MS STRUCTURE,ON WHICH WE WILL BE MOUNTING THE HIGH-SPEED DOOR.

R01- IN THE PREVIOUS DRAWING,THE CLEAR WIDTH WAS RECORDED AS 6500 MM;THE ACTUAL CLEAR WIDTH IS 6000 MM,AS MENTIONED IN THE SITE REPORT.

SR	PRODUCT NAME	CLEAR WIDTH (CW)	CLEAR HEIGHT (CH)	QTY
1	ROLLING SHUTTER	**6000**	**5720**	01
2	HIGH SPEED DOOR	**5000**	**5000**	01

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE :- MOTORISED ROLLING SHUTTER

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Website:- www.nihva.com

	NAME	DATE	
			CLIENT - GE AEROSPACE
DRAWN	B.S.	29/07/2025	PROJECT - MOTORISED ROLLING SHUTTER
CHECK & APPROVAL	V.T.	29/07/2025	FORMAT NO - NIHVA-DD-F-03
			DWG. NO. : NIHVA/25-26/GE/2907001 — REV-01
			SCALE: NTS — WT: — SHEET: 01 OF 01
ALL DIMENSION ARE IN mm			If any queries contact : design2@nihva.com