
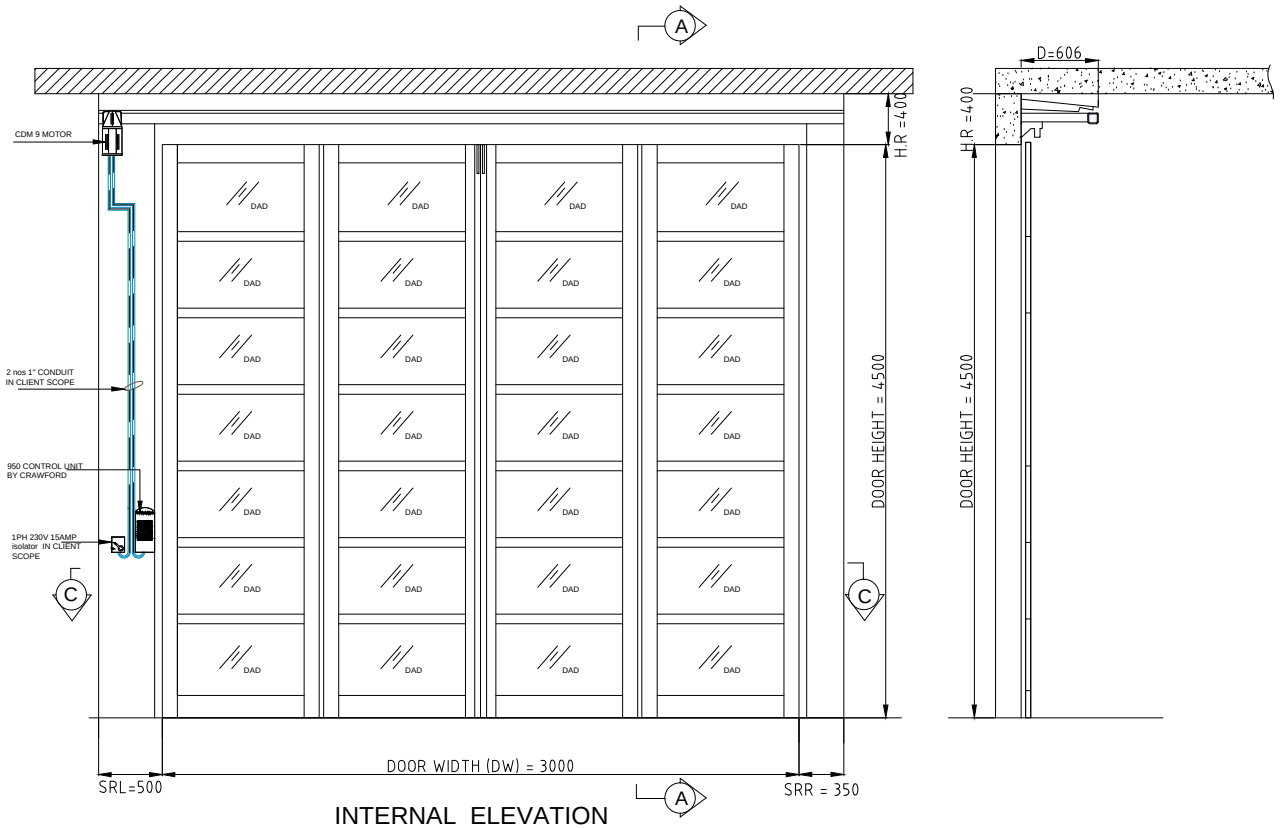


INTERNAL ELEVATION

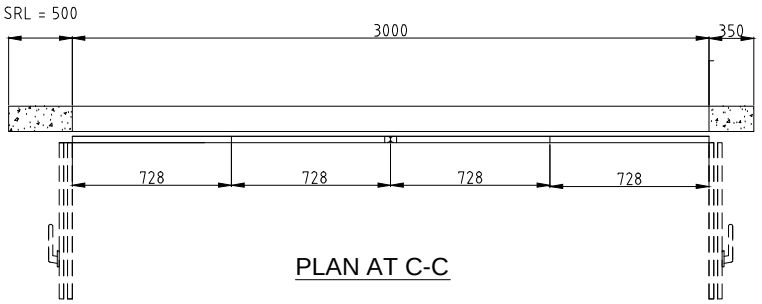

PLAN AT C-C

QTY	DOOR WIDTH DW	DOOR HEIGHT DH	HEAD ROOM (HR)	SIDE ROOM LEFT (SRL)	SIDE ROOM RIGHT (SRR)	DEPTH D
04	3000	4500	400	500	350	600

NOTES

(TO BE PROVIDED BY CONTRACTOR)

1) SURFACE FOR FIXATION
a) SURFACE TO BE FLUSH AND IN ONE LEVEL
b) ANY OF THE FOLLOWING MATERIALS ARE SUITABLE FOR FIXATION (CONCRETE,HOLLOW BLOCKS IN FILLED WITH CONCRETE,STEEL,WOOD)
2) STRUCTURE TO CARRY THE ENTIRE WEIGHT OF THE DOOR

ELECTRICAL REQUIREMENTS

2) 1 PHASE 230V 15AMP INCOMING POWER SUPPLY NEAR THE CONTROL PANEL WITH ISOLATED SWITCH 15-A
3) 1"CONDUIT 1no FROM THE CONTROL UNIT TO OPERATOR TO BE PROVIDED BY CONTRACTOR
4) 1"CONDUIT 1no FROM THE ISOLATOR TO OPERATOR TO BE PROVIDED BY CONTRACTOR

MODEL NUMBER	220 FD
COLOUR	Anodised aluminum
CONFIGURATION	2+2

OPERATOR: CDM9 MOTOR TECHNICAL SPECIFICATION	
OPERATION	CDM-9
SUPPLY VOLTAGE VOLTAGE ELECTRICAL (INTERNAL) MOTOR	230 V 1-PHASE 50/60HZ 230V AC
IP CLASS	

Client:

Project:

SUB CONTRACTOR / SUPPLIER:

Crawford
A company in a nanda group

DUBAI
P.O. BOX: 80983
TEL: 04-8852888
FAX: 04-8854919

ABU DHABI
P.O. BOX: 32996
TEL: 02-6318200
FAX: 02-6210607

DESIGNED BY:-	DATE:sept-24-15
DRAWN BY:-RTA	ALL DIMENTIONS ARE IN MM
CHECKED BY:Vargh	SCALE:- N.T.S
APPROVED BY:-	
DRAWING NUMBER ME-10193-220FD-00A	REV:- 00