
HYD CYL - Ø50 (Bore) X 35(Rod)X 455 (Stroke length) (Single Acting)

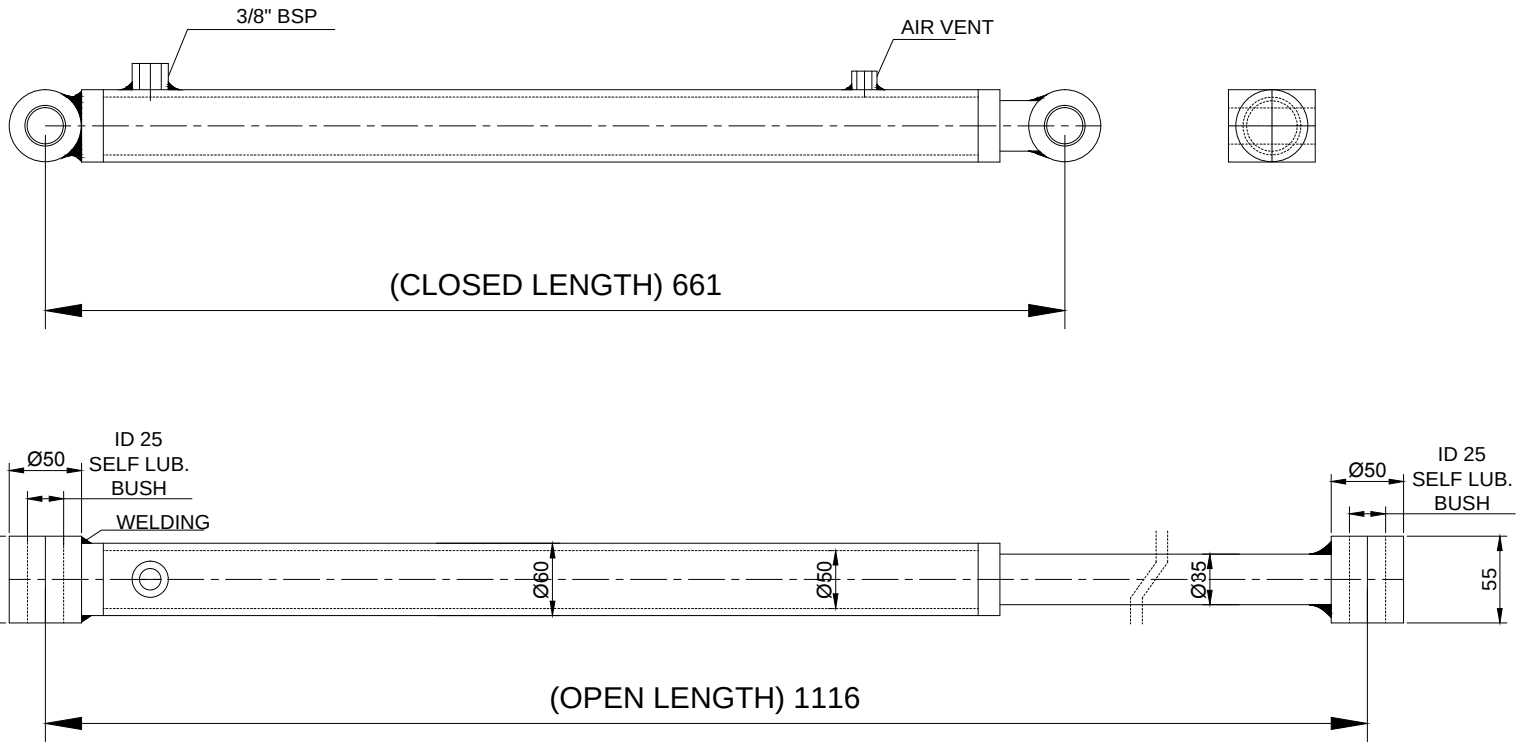

SPECIFICATION :-

- BORE :- Ø50mm
- STROKE :- 455 mm
- PISTON ROD :-Ø35mm
- MOUNTING :-BOTH END CLEVIS
- MEDIUM :-HYDRAULIC OIL
- DESIGN :-WELDED TYPE.(SINGLE ACTING)
- BOTH END PORT CONNECTION :-3/8" BSP
- WORKING PRESSURE :- 200 BAR.
- OPERATING TEMPERATURE :-20 'C TO 100'C (DEPENDING ON SEAL)
- MAX RECIPROCATING SPEED :-12m/min
- STROKE TOLERANCE :-0 TO +1mm
- CYLINDER COATED WITH ONE COAT OF GRAY PRIMER AND ONE COAT OF PAMPAC GRAY PAINT

QUANTITY- 2 NOS

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE: DECK CYLINDER			NIHVA TECHNOLOGIES PVT. LTD.
	NAME	SIGN	DATE
DRAWN	PRADEEP		14.04.2018
CHECK	PRADEEP		14.04.2018
APPRD.	PRADEEP		14.04.2018
If any queries contact : design@nihva.com			
ALL DIMENSION ARE IN mm			

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

CLIENT -			
PROJECT - DLMP1004			
SITE LOCATION -			
DWG. NO. : NIHVA/18-19/VDR/006			REV- 0
SCALE: NTS	WT:		SHEET: 01 OF 01