



Abbrevation's:
WOW-Wall Opening Width
WOH-Wall Opening Height
UC-Under Cut
FFL-Finished Floor Level

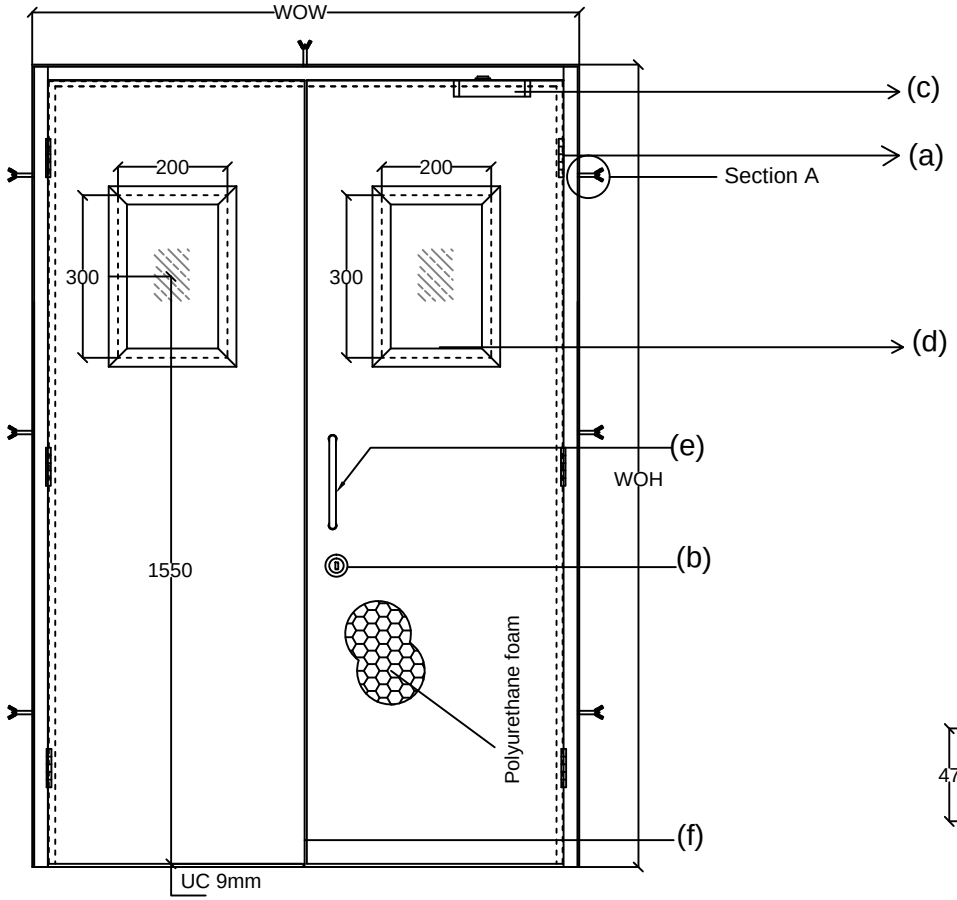

Inside Elevation



Top View

ASSESORIES DETALES

(a) HINGES: 6 No. SS Ball bearing butt hinges 100x75x3mm (iclean)

(b) LOCK : Mortise Dead lock,Cylinder(Both side key) with Escutcheon (iclean)

(c) DOOR CLOSER (iclean)


(d) GLASS : Single glazed 5mm Thick Vision Glass of size 200x300mm.

(e) HANDLE : D Handle(254 mm)(iclean)

(f) CONCEALED FLUSH BOLT (iclean)

Shutter thickness : 47 mm
Frame Sheet thick : 1.2mm
Shutter sheet thick :0.8mm
Fixing : On Soliid Brick plasterd wall with Anchors
Electrostatic powder coated

NOTE:- *All Dimensions are in mm.
*Tolerance:-All Linear Dimensions ±3mm,Others ±0.5mm.
*The Drawing Is For Location of Hardware only. Drawing Does Not Represent The Hardware For More Clarity, Please Go Through Hardware Broucher.

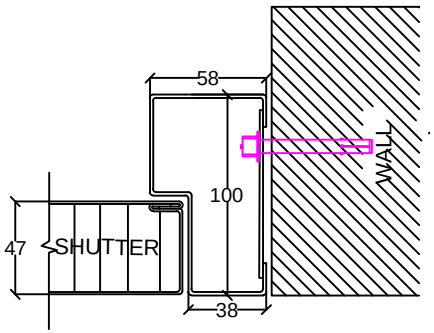

Detail view of Section A

STEEL DOOR SIZES			
WOW	WOH	QUANTITY	LOCATION
2000	2100	2	GROUND FLOOR
1800	2100	12	
1800	2100	1	FIRST FLOOR

COLOR - RAL 7035 LIGHT GREY

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not be sold or copy to any other concern.

DOUBLE LEAF STEEL DOOR

CLIENT APPROVAL

ALL DIMENSION ARE IN mm

	NAME	DATE	SIGN.
DRAWN	OMKAR	09/03/16	
CHECK	ANIL	09/03/16	
REV.	01		
APPRD.			
MFG			

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGY PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:-www.nihva.com

CLIENT - HYOSUNG T&D
PROJECT -
SITE -
DWG. NO. - NIHVA/15-16/212
SCALE: 01 | WT: | SHEET: 01 OF 01
If any queries contact : projects@nihva.com