JIELONG
JIE LONG SHUTTER MOTORS LTD.
杰 龙 机 电

THE NATIONAL STANDARDS FOR ROLLING DOOR OPENER INDUSTRY WERE WRITTEN BY JIELONG

杰龙--行业标准主编单位



门窗智能驱控专家

Jie Long Shutter Motors Ltd.
Add: No.27 Xiaogang North Road, Lantian Industrial park, Longwen District,Zhangzhou, Fujian,China P.C.363005
Tel: (86-596) 216-0168
Fax: (86- 596)216-7788
Website: www.jielong.com.cn, www.jlon.com.cn
E-mail: info@jlon.com.cn

漳州市杰龙机电有限公司
地址：福建省漳州市龙文区蓝田工业区小港北路27号
电话：0596-2160168
传真：0596-2167788
网址：www.jielong.com.cn，www.jlon.com.cn
邮箱：Info@jlon.com.cn
全国服务热线：400-888-7556

CORPORATE SPIRIT:

Quality - Efficiency - Pragmatic - Pioneering

杰龙企业精神：品质 效率 务实 开拓



CORPORATE VALUES:

Honest and trustworthy, proficient in technology, win-win in cooperation and harmonious sharing

CORPORATE GOAL:

Success, excellence, sustainable development and to be a well-known enterprise of doors and windows industry in the world.

CORPORATE MISSION:

We strive to improve, innovate and serve the application of the intelligent door and window
as well as the improvement of relative control system.
We will continue to create value for our customers, staff, partners, shareholders and the society.

我们的价值观：
诚实守信、技湛艺精、合作共赢、和谐分享。

杰龙的愿景：
成功、卓越、永续，成为全球门窗业界公认的著名企业。

公司的使命：
不懈地致力于智能门窗应用及驱控产品的改善、创新与服务，满足人们对文明、和谐生活方式的追求；
并不断为客户、员工、合作伙伴、股东与社会创造价值。



感悟 展望 心声

博采众长 开拓创新 自强不息 追求卓越

More than twenty seven years, we Jielong focus on the innovation of intellectual controls and opener of doors and windows, as well as overcome numerous difficulties and create a lot success in the industry, inheriting the advanced technology, scientific management and excellent quality assurance, so as to forging a quiet good cultural brand of Jielong, the marvelous dragon, which is able to take the lead of the industry and gradually become one of the most famous door motor manufacturers in China.

We will continue to create value for our customers, staff, partners, shareholders and the society. We believe our continuous efforts to create and make progress could contribute to Jielong's success and development!

Thank you!

General Manager
Hong Junlong

二十多个春秋，二十多年的厉练，我们专注于门窗智能驱控的创新，我们战胜了无数的困难、创造了一次一次的成功，传承着行业领先的技术、科学的管理和优良的品质保证，锻造了良好的“杰龙”品牌文化形象，跻身于行业先进，成为中国知名的门机制造商。

客户的赞誉，社会的认可，我们深感欣慰；员工的认同，合作伙伴的信任，我们心存感激！感谢各界新、老朋友对“杰龙”的关爱、协作与支持；感谢“杰龙”员工的拼搏、创造与努力；感谢社会给予“杰龙”一个良好的发展环境。


我们庆幸自己处于老一辈“杰龙”人辛勤创建出的厚重而夯实的平台之上，从一个高的起点开始新的征程。我们珍惜已有的果实，更期盼魅力“杰龙”永续。“杰龙”能够承担起对历史、对社会的责任与义务—恪守“诚实守信、技湛艺精、合作共赢、和谐分享”的准则；坚持“博采众长、开拓创新、自强不息、追求卓越”模式；不懈地致力于智能门窗应用及驱控产品的改善、创新与服务,为杰龙实现“成功、卓越、永续，成为全球门窗业界公认的著名企业”的理想和目标而奋发向上。

愿“杰龙”公司与您携手前进，共创美好未来！

总经理：洪俊龙

CONTENTS
目录


Company Profile	05	公司简介
Extensive Cooperation	07	广泛的合作
Jielong Honor	09	杰龙荣誉
Company's Brand Strategy	10	公司品牌战略
Product Certification	10	资质与认证
Company's Management	11	公司现代化管理
Strict Quality Control	13	严格品质检测
Rolling Door Motor Products	15	电动卷帘门机
ECR Single/Three Phase Roller Shutter Door Opener	16	ECR单/三相电动卷帘开门机系列
ECRD Roller Shutter Door Opener	19	ECRD直流电动卷帘开门机系列
Fire Roller Door Opener	21	防火卷帘门机
FJJ-JLFH/JLSL/DWWS Fire Roller Door Opener	22	FJJ-JLFH/JLSL/DWWS 防火电动卷帘开门机系列产品
FJJ-JLSL/DWWS Double Curtain Fire Door Opener	24	FJJ-JLSL/DWWS无机双帘防火卷帘门电机
JI36 Intelligent Fire Shutter Control System	25	JI36型智能防火卷帘控制器
DYG Smoke Protect Screen Tubular Motor	26	DYG挡烟垂壁用管状卷帘机系列
Industrial Door Opener Series	27	工业门开门机
GKH1/GKH2 Sectional Door Opener	29	GKH1/GKH2 工业滑升门开门机产品系列
GKJ2/GKJ3 Industrial Door Opener	30	GKJ2/GKJ3 工业门开门机系列产品
ECRS Roller Shutter Door Opener	31	ECRS机电分离式卷门机
GKHDC Sectional Door Opener	32	GKHDC 直流滑升门开门机
Other Products	33	其他产品
Swing Gate Opener	34	平开门机
JLG Tubular Motor	35	JLG管状卷帘电机系列
Central Motor	36	中装卷门机
Sliding Gate Opener	37	平移门机
Spring Balanced Door Opener (Australian Door Opener)	38	弹簧平衡门机(澳式门机)
Remote Control	39	遥控器
Lock Box	39	杰龙锁盒
Reserve power Supply	40	储备电源
Safety Brake	40	刹车安全器
Temperature-control release device	41	温控释放装置
Infrared Photo Cell	41	红外线对射器
Blocked Rebound Device and Alarm	41	遇阻反弹装置与报警器

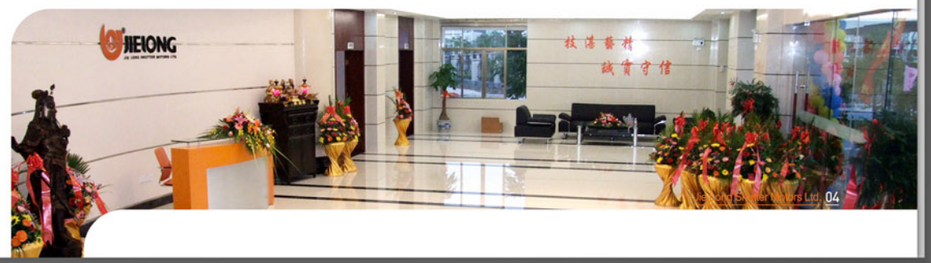



COMPANY PROFILE
公司简介

Honest and Trustworthy
Proficient in Technology
Win-win in Cooperation
Harmonious Sharing



Since Jielong Shutter Motors Ltd established in 1988, following accumulated technical experience, management system for more than twenty seven years, Jielong has gradually become the most renowned manufacturer for Drives of rolling shutter door and related peripherals in China.

The company is located in Zhangzhou City which 55 Kms from Xiamen airport. The whole land area of Jielong is more than 44000㎡, with more than 30000 square meters building area for modern office, R&D building and standard workshops.

The staffs with college degrees for 40%, gathering a group of higher skilled experts for R&D and manufacturing team, The production capacity of drives has reached 150000 units per year.

The mainly product include: Sectional door opener, Industrial shutter door opener, Fireproof door motor, Rolling shutter door motor and their accessories.

.Jielong Company has promoted the ISO quality managing system since April, 2004, and has been carried out ISO 2001-2008 standard. The Chinese professional standard of rolling door motor and fire motor is made by Jielong company.

Jielong have more than 20 offices in China, as well as international markets in Europe, Australia, South America, Middle East countries and Southeast Asia. We are very proud of our quality that worldwide clienteles are very appreciated.

诚实守信
技湛艺精
合作共赢
和谐分享

漳州市杰龙机电有限公司创建于1988年，是专业研发和制造电动门窗驱动和控制产品的机电一体化实业公司，传承二十多年积累的技术经验、管理体系和经营实力，成为国内电动门窗机行业的龙头企业。

公司座落于经济繁荣、四通八达的漳州市蓝田工业开发区。花园式厂区占地66亩(四万多平方)，拥有建筑面积三万多平方米的现代化办公、研发大楼和标准化生产车间；大中专以上学历员工占比40%，集聚一批由技艺精湛的高中级职称专家组成的研发、制造技术团队；配备了先进的计量检测仪器、生产设备和高效组装生产线，形成了国内一流的电动门窗机生产制造工艺技术，各种电机的年生产能力已达15万台。

公司确立“品质、效率、务实、开拓”的企业精神，始终以市场为导向，持续致力于科技创新，不断开发新产品和科学改良工艺技术，铸就了机电一体的“杰龙”牌“电动门窗机”专有核心技术；形成了以“工业滑升门机”、“防火卷帘用卷门机”等为主导的九大类电动门机及其配套控制装置的独具特色的产品体系。现拥有“杰龙”等自主知识产权商标16个；先后获得“电动卷帘门的防滑装置”等19项国家专利。公司从2004年起推行贯彻ISO 2001-2008 标准质量管理体系；并获得了CE，CCC，SASO,INMETRO等认证。

“杰龙”品牌定位于中高端市场，深受广大用户喜爱，始终保持在国内同行业的领先地位。产品销售遍及全国30多个省市，以及欧洲、澳洲、南美洲、中东、东南亚等数十个国家和地区。企业综合实力持续发展壮大，受到了欧美多家知名集团公司的青睐与好评。

“杰龙”坚持以一流的技术、一流的品质、为客户提供一流的产品和服务；恪守“以人为本、和谐分享、诚实守信、共赢发展”的理念；充满活力的“杰龙”将一如既往地为您和社会创造价值！

EXTENSIVE COOPERATION
广泛的合作





Customer`s demand is our target of continuous innovation
Customer`s trust is the power of our continuous improvement

客户的需求——是我们不断创新的目标
客户的信赖——是我们不断改善的动力

THE NATIONAL STANDARDS FOR ROLLING DOOR OPENER INDUSTRY WERE WRITTEN BY JIELONG 杰龙--行业标准主编单位





JIELONG HONOR
杰龙荣誉

- In 2000, in the competition of National Fire Products Industry Chamber of Commerce, Jielong "fire rolling door motor and control system both be selected for "first choice products "
- In 2001, Member unit of the China Fire Protection Association 2001
- In 2006, Awarded the "Fujian AA grade credit enterprise" by Fujian Enterprise Evaluation Center to be the first vice editor of "GA603 fire door motor " industry standards of Security ministry of China
- In 2008, Ministry of Construction electric roller doors open industry standards editor.
- In 2009 Awarded "Fujian Famous Brand" by Fujian Provincial Administration for Industry and commerce.
- In 2011 Ministry of Construction Sectional door opener industry standards vice editor.
- In 2012 Awarded the "Top 10 Enterprise of door and windows export" in China.
- In 2012 Awarded the "Top 10 Enterprise of door opener and sensor " in China.
- In 2013 The electric rolling doors opener chief editor of Building and Construction industry standards.



- 2000年“昆明消防产品行业商会”全国业内产品公开竞标审评会上，“杰龙”防火卷门机与控制器系列产品被综合评定为“首选产品”
- 2001年中国消防协会会员单位
- 2005年福建省企业评价中心授予《福建AA级信用企业》
- 2006年中华人民共和国公共安全行业标准“GA603防火卷帘用卷门机”第一参编单位
- 2007年建设部“门标委”自动门车库门标准化技术委员会常务委员单位
- 2008年建设部“电动卷门开门机”行业标准主编单位
- 2009年福建省工商行政管理局授予《福建省著名商标》荣誉
- 2011年建设部“工业滑升门开门机”行业标准参编单位
- 2012年获得“全国门窗产品出口十强企业”荣誉
- 2012年获得“全国门用开门机、传感器十强企业”荣誉
- 2013年建工行业标准“电动卷门开门机”主编单位













COMPANY'S BRAND STRATEGY
公司品牌战略

PRODUCT CERTIFICATION
资质与认证



COMPANY'S MANAGEMENT

公司现代化管理





Advanced production technology and process ---- make the details to be perfect

先进的生产工艺及流程　把细节做到极致

Following more than twenty years of researching technology, production and manufacturing technology, management experience and quality standard, improved tools and methods, supported by advanced management and information system, Jielong strives to "produce any required amount of products only when needed", it always adheres to the criteria of "zero defect , zero stock, zero complaint, zero fault" and the goal of "creating the most perfect products through the most perfect process".








公司秉承二十多年的研发技术、制造工艺、管理经验和质量基石之传承，极力吸收并推行国际上先进的管理模式精益生产，消除企业所有环节上的不增值活动，充分运用价值流分析、看板管理、准时化生产,以达到降低成本、缩短研发周期和生产周期、改善质量、提高对多变的市场的适应能力的目的，以应对市场多变的小订单多品种甚至个性化需求的挑战。始终追求“零缺陷、零库存、零抱怨、零故障”和“用尽善尽美的过程为客户创造尽善尽美的价值”之目标。


STRICT QUALITY CONTROL
严格品质检测

STRICT QUALITY CONTROL TO ENSURE THE QUALITY OF EACH PRODUCT

For more than twenty years, our company consistently promotes the enterprise spirit of "quality, efficiency, pragmatic and pioneering, and always gives top priority to "quality", fully implements the ISO9001 quality management system at the beginning and consistent implements effectively out in the following times, so as to ensure that the product quality can be stable and promoting. As a result, Jielong products have been selected as "preferred products" by the industry and received recognition and praises by the majority of users.

Through the efforts of all staff, our company successfully has passed the stages of quality inspection, statistical quality management and entered into total quality control stage. As a result, Jielong Company's quality management is full with the characteristics of participating, comprehensive, preventive and service.

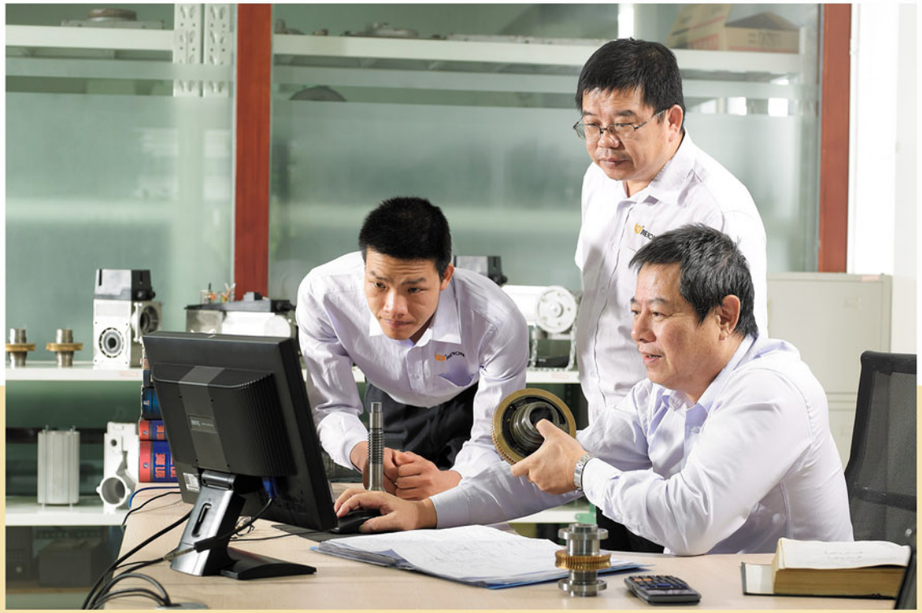

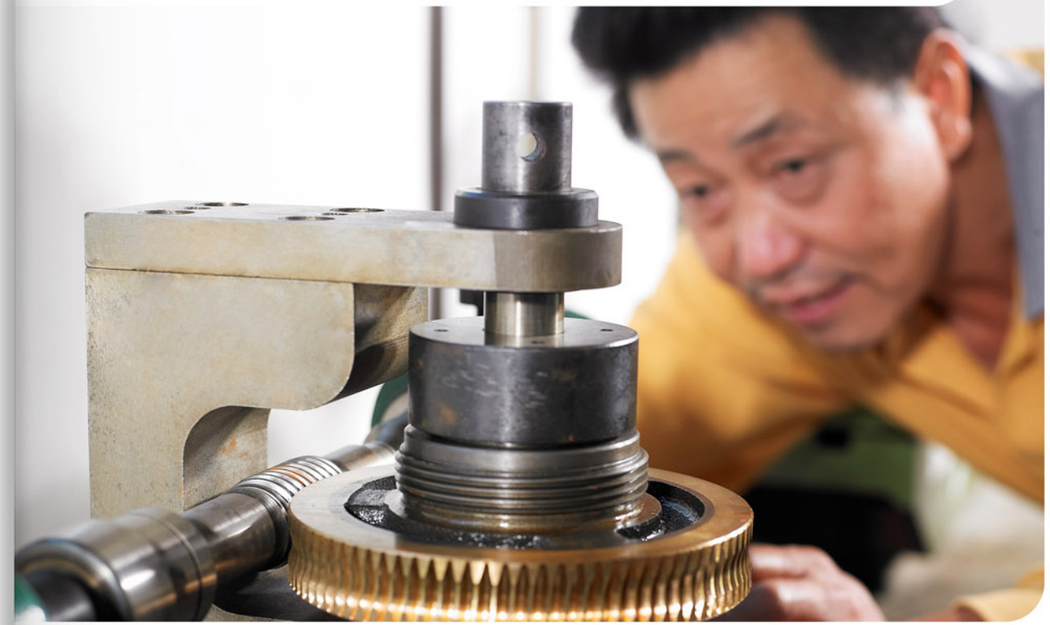

严格的质量管理　保证每一件产品的品质

二十多年来，公司持之以恒地发扬“品质、效率、务实、开拓”之企业精神，并始终将品质放在首位，创业之初就全面推行ISO9001质量管理体系并坚持不懈地有效运行，确保了公司的产品质量得以稳定并不断提升，杰龙产品在业界被评选为“首选产品”并获得了广大用户的肯定和赞许。

通过全员的努力，公司顺利跨越检验质量管理、统计质量管理阶段而进入全面质量管理阶段，公司的质量管理更加具有全员性、全面性、预防性和服务性。





Testing Instrument
部分检测仪器和设备


Brinell Hardness Instrument
布洛维硬度计


Gauge Micro Balanced
微电脑秒表仪


Spring Test Device
弹簧试验机


Platform Measuring Plate
平台测量平板方箱


Worm Comprehensive Measuring Instrument
蜗杆副综测仪


Gear Beats Tester
齿轮跳动检查仪


Three-phase Digital Electric Parameters Tester
三相数字电参量测试仪


Withstand Voltage Tester
耐电压测试仪


Turn Impulse Withstand Voltage Tester
匝间冲击耐压测试仪

ROLLING DOOR MOTOR PRODUCTS
电动卷帘门机



ECR SINGLE/THREE PHASE ROLLER SHUTTER DOOR OPENER
ECR单/三相电动卷帘开门机系列

The ECR roller shutter motor has been produced by Jie Long for many years. It utilizes the most advanced production techniques with the latest techniques available to provide reliability with diverse functionality. The product is known for its quality, it is simple to install, and it has proven to be a reliable accessory in a wide variety of applications.

JL-ECR单/三相电动卷帘门机系列是“杰龙”主导产品，严格按照并严于建工行业标准的《JG/T411-2013 电动卷门开门机》企业标准设计和制造，产品设计完善、工艺成熟、品质优良。广泛应用于商场、厂房、仓库、车库等建筑物卷门(卷帘式、卷闸式等) 的电动启闭，是现代建筑物的理想配套产品。

PRODUCTS FEATURES:

- Pleasing designs with powerful drive.
- With 120℃ overheat protection, overload protection.
- Safety Brake, accurate limited control positioning, with double limit switch protection, can prevent door over roll-up.
- Manual operation when power-off.
- Powerful, low noise, lower energy consumption.
- Easy to install, easy to maintain and long useful life.
- With the national patent of Chain-break protection device.

产品性能特点

- 采用四继电器(或接触器)控制线路，标准设计、规范制造，电气性能可靠、安全。
- 电机带120℃热保护功能，遇异常过载自动停机保护；机温降至70℃时可恢复常态操作。
- 制动平稳可靠，行程限位控制定位精确；配置双限位保护，防止卷门冲顶。
- 卷门机带手、电动自动切换装置，断电或维护、调整时可手动启闭操作。
- 强劲有力、运行平稳、低噪音、能耗小。
- 易安装、易调试、质量稳定、可靠耐用。
- 配置有断链防坠保护装置(国家专利)



型号:ECR-225-1P/3P
(额载400kg,单/三相2继电器控制线路)
(rated-load 400kg,
single phase/three phase 2 relay control circuit)



型号:ECR-168/343/412-1/3P
(额载300kg/500kg/600kg,单/三相4继电器控制线路)
(rated-load 300kg/500kg/600kg,
single phase/three phase 4 relay control circuit)



型号:ECR-647/809-1/3P
(800kg/1000kg,单/三相4继电器控制线路)
(rated-load 800kg/1000kg,
single phase/three phase 4 relay control circuit)



型号:ECR-1401/1617-3P
(额载1300kg/1500kg,三相接触器控制线路)
(rated-load 1300kg/1500kg,
three phase contactor control circuit)



型号：ECR-2450-3P
(额载2000kg,三相接触器控制线路,洞外式安装)
(rated-load 2000kg,
three phase contactor control circuit, out-door installation)


ECR phase motor specifications and technical parameters
ECR产品系列主要型号、规格及技术参数表

型号规格 Model	额定输出转矩 (N·m) Rated output torque(N·m)	额定输出转速 (r/min) Rated output speed(r/min)	电机功率 (W) Motor power (W)	额定电压/频率 (V/Hz) Rated voltage/frequency (V/Hz)	额定电流 (A) Rated current (A)	持续工作时间 (min) Continuous working time (min)	标定卷升参数 Standard roll up parameter			
							卷筒外径 (mm) Drum dube outer diameter (mm)	最大提升力 (kg·f) Maximum Lifting power (kg·f)	最大提升高度 (m) Maximum lifting height (m)	帘片厚度 (mm) Profile thickness(mm)
										15 / 20
单相交流电动卷帘开门机 ECR Single phase motor specifications and technical parameters										
ECR—84—1P	84	5.0	75	220/50	2.8	7	89	200	4	4.5
ECR—168—1P	168	5.0	250	220/50	2.8	7	114	300	6	7
ECR—225—1P	225	4.2	180	220/50	1.8	7	114	400	6	7
ECR—343—1P	343	4.8	370	220/50	3.2	7	140	500	6	7
ECR—412—1P	412	4.8	370	220/50	3.3	7	140	600	6	7
ECR—647—1P	647	4.0	400	220/50	4.7	7	165	800	7	7
ECR—809—1P	809	3.5	400	220/50	4.9	7	165	1000	6	7
ECR—1617—1P	1617	3.3	700	220/50	8.2	7	219	1500	9	10
三相交流电动卷帘开门机 JL-ECR three phase motor specifications and technical parameters										
ECR—168—3P	168	5.0	250	380/50	1.5	15	114	300	6	7
ECR—225—3P	225	4.2	180	380/50	0.75	15	114	400	6	7
ECR—343—3P	343	4.8	250	380/50	1.5	15	140	500	6	7
ECR—412—3P	412	4.8	250	380/50	1.5	15	140	600	6	7
ECR—647—3P	647	4.0	370	380/50	2.3	15	165	800	7	8
ECR—809—3P	809	3.5	370	380/50	2.8	15	165	1000	6	7
ECR—1401—3P	1401	4.4	850	380/50	3.2	15	219	1300	7	8
ECR—1617—3P	1617	5.2	1000	380/50	3.8	15	219	1500	8	9
ECR—2450—3P	2450	3.6	1000	380/50	4.1	15	245	2000	12	13

Remark: If you need any special design we can make it for you as your request.
注:若客户对卷帘门机的“最大提升力”、“最大提升高度”、“卷筒外径”及“输出转速”等使用性能参数及其参数组合，有超出主要型号规格配置之外的特殊变化的需求，可向本公司定制特配(拓展型)产品。



型号：ECR-3000kg-3P
(特种配置电机，额载3000KG，需特殊定制。
Special Model ECR-3000Kg-3P，Special Order.)



ECR MOTOR ACCESSORIES:

bracket board, Side board, a big sprocket wheel,
a small sprocket wheel, 3discs, a chain, a bearing, a shaft,

ECR卷帘门机出厂时还随机标配有
规范、实用的成套附件，使卷帘门的安装和使用实现简单、便捷：

附板、附板轴承座、附板轴承、传动板(洞外式不配)、
支承板2片(洞外式4片)、芯轴。

We can produce special model if customer request
如客户有特殊使用需求，还可向我司订制其他特制规格卷帘门机。











AVAILABLE OPTION FOR JL-ECR SERIES DEVICES:
Jielong also provides the following related peripherals such as remote control, Infrared photocell and other security products,

可供选配与JL-ECR系列产品配套的功能、器件：
客户还可根据自身使用的个性化需求，选配下列遥控、安保等功能性配套产品与JL-ECR卷帘主机匹配应用。

YKQ-988-S remote control (fixed code)
YKQ-988-S遥控器(固定码基本型)



Infrared (can be connected with remote control)
红外线对射装置(插接在控制器上使用)



Double layer stainless surface lock box
双层普通不锈面锁盒



Door safety devices
遇阻反弹



Safety brake
卷帘门刹车安全器



Reserve power supply
储备电源



ECRD ROLLER SHUTTER DOOR OPENER

ECRD直流电动卷帘开门机系列

JL-ECRD DC rolling door motor is "Jie long" new product series, design and produce in accordance with the construction industry standard of JG/T411-2013 electric rolling door motor enterprise standard strictly, The DC motor should be installed with electric control system. Normally it can be used by electric power, transmit to DC for motor drive. If the power off, the control system automatically switch for its built-in battery supply for DC motor, so you can also drive the door open and close easily.

JL-ECRD直流式电动卷帘门机是“杰龙”公司创新开发的一档系列产品，严格按照严于建工行业标准的《JG/T411-2013 电动卷门开门机》企业标准设计、制造，“直流式电动卷帘门机”应外挂“变电备电控制器”配置一起工作，通过“变电备电控制器”插接市电使用，在有市电时经“变电备电控制器”整流、变压为“直流式电动卷帘门机”供给直流电源,停电状况下“变电备电控制器”自动切换为其内置蓄电池为“直流式电动卷帘门机”供电，解决了普通交流卷帘门机遇外接市电断电即停机的缺陷，使您在外电异常时仍能从容、方便的启闭卷帘门，其优越的功能是商场、厂房、仓库、车库等现代建筑物卷门(卷帘式、卷闸式等)最理想的配套产品。

ECRD MOTOR FEATURES:

- Full function with JL-ECR series motors but more useful.
- Powerful, lower noise, a long useful life.
- With the variable electric controller can be used easily when power off.
- Easy to install and maintain.

主机性能特点

- 完全具备JL-ECR系列卷帘门机的工作功能，性价比更高。
- 采用低电压大功率直流电动机，具有效率高、动力强、噪音小的特点，整机运行更平稳，使用寿命更长。
- 配带“变电备电控制器”工作，在外电断电等异常时仍能从容、方便的启闭卷帘门。
- 外挂“变电备电控制器”替代本机控制电气线路，多方面拓展了门机操控功能，优化了产品结构，整机电气性能更安全，使门机安装、使用和维护更简便、可靠。



型号:ECRD-225-DC24V
(额载 rated load 400kg)

型号:ECRD-412-DC24V
(额载 rated load 600kg)

型号:ECRD-647-DC24V
(额载800kg)(rated load 800kg)

AVAILABLE OPTION FOR JL-ECRD SERIES DEVICES:
Jielong also provides the following related peripherals, such as remote control, Infrared photocell and other security products.

可供选配与JL-ECRD系列产品配套的功能、器件：
客户还可根据自身使用的个性化需求，选配下列遥控、安保等功能性配套产品与JL-ECRD卷帘主机匹配应用。



Door safety devices
遇阻反弹



Infrared (can be connected with remote control)
红外线对射装置(插接在控制器上使用)



Safety brake
卷帘门刹车安全器



Variable speed limiter
可变速限位器

ECRD THE CONTROLLER FEATURE:

- When power connected the controller working directly for DC motor with built-in rectifier transformer, the battery energy would not be damaged.
- With 12v4.5ah battery, when energy lost automatically display and charged.
- When the power off, it can automatically switch to battery powered for motor, the battery ensures can be working 10 times with full power.
- Control system made by microchip.
- Remote control with long distance transmit and strong anti-interference ability.
- Can be connected with infrared and other related devices.

ECRD控制器性能特点

- 市电工作时，通过内置的整流变压器直接为电动机输送直流电源，不损耗蓄电池。
- 内置12V4.5Ah蓄电池，蓄电池欠电时自动显示保护并在有市电时自动充满电。
- 市电断电时,自动切换为蓄电池对电动机供电，蓄电池满电时可确保全程工作启闭10次。
- 控制器采用微电脑芯片的智能化控制系统，工作稳定、反应灵敏。
- 带遥控功能，抗干扰能力强，遥控距离远。
- 可插接红外线对射器等装置配套使用，实现安保防护。

ECRD phase motor specifications and technical parameters
ECRD产品系列主要型号、规格及技术参数表

型号规格 Model	额定输出转矩 (N·m) Rated output torque(N·m)	额定输出转速 (r/min) Rated output speed(r/min)	电机功率 (W) Motor power (W)	工作电压/频率 (V/Hz) Rated voltage/ frequency (V/Hz)	主机 输入电压 (V) Input Voltage	主机 额定电流 (A) Rated Current	标定卷升参数 Standard roll up parameter 卷筒外径 (mm) Drum dube outer diameter (mm)	最大提升力 (kg·f) Maximum Lifting power (kg f)	最大提升高度 (m) Maximum lifting height (m) 帘片厚度 (mm) Profile thickness(mm) 15	20
ECRD—225	225	3.5	180	220/50	24	12	114	400	6	7
ECRD—412	412	3.8	300	220/50	24	15	140	600	6	7
ECRD—647	647	3.0	330	220/50	24	19	165	800	6	7

Remark: If you need any special design we can make it for you as your request.
注:若客户对卷帘门机的“最大提升力”、“最大提升高度”、“卷筒外径”及“输出转速”等使用性能参数及其参数组合，有超出主要型号规格配置之外的特殊变化的需求，可向本公司定制特配(拓展型)产品。

FIRE ROLLER DOOR OPENER
防火卷帘门机



FJJ-JLFH/JLSL/DWWS
FIRE ROLLER DOOR OPENER
FJJ-JLFH/JLSL/DWWS 防火电动卷帘开门机系列产品

Main purpose: supporting the use of intelligent fire shutter controller, the event of a fire within the building, equipping fire shutter is closed, the smoke of the the partition fire risk area, fire intelligent drive control, widely used in buildings, garages, shopping malls, factories, warehouses, docks, airports and other construction sites, supporting the ideal of the modern building fire safety.

主要用途：与智能防火卷帘控制器配套使用，对建筑物内发生火灾时为封闭、隔断火险区域的烟、火灾等配置装备的防火卷帘进行智能化驱动控制，广泛适用于楼宇、车库、商场、厂房、仓库、码头、机场等建筑场所，是现代建筑物的安全防火的理想配套产品。

PRODUCTS FEATURES:

- Pleasing designs with powerful drive
- With 120℃Coverheat protection, overload protection;
- Stable and reliable braking, accurate limited control positioning, with double limit switch protection, can prevent door over roll-up.
- Manual operation when power-off
- Powerful, low noise, lower energy consumption.
- Easy to install, easy to maintain and long useful life.
- With the national patent of Chain-break protection device

性能特点

- 主机配套使用的GA386防火卷帘控制器电气性能可靠、安全，与标准消防中控系统完全匹配、完美联动。
- 主机电机采用铜芯，动力强劲、效率高，能耗低、噪音低，具热保护和过载自动停机保护等功能，机温降至70℃时，可恢复常态使用。
- 主机制动平稳可靠、耐久性好；行程限位控制定位精确，配置双限位保护，具防止卷门冲顶功能。
- 主机设置有阻尼机构以降低速放下降速度，提高安全性能。
- 主机设置电动、手动切换装置，当断电、维护或调整时，可手动启闭操作。
- 传动装置支架设置有断链防坠保护装置(国家专利)，确保运行安全。
- 传动装置支架厚实，运行平稳，噪音低，传动效率高，能耗低。
- 整机易安装、易调试、质量稳定、可靠耐用。
- JLSL型(无机双帘、双轴)适用于双重隔火帘，且前后帘中心距连续可调；DWWS型(洞外式无机双帘、单轴)适用于特大跨度的防火分区场合。
- 可依用户个性需求，定制特殊规格和配置的各类拓展型产品。



型号:FJJ-225-3P-JLFH (400)
(额载400kg单/三相防火卷帘门机)
(rated-load 400kg, single phase/three phase fireproof motor)



型号:FJJ412-3P-JLFH (300-600)
(额载300kg/500kg/600kg单/三相防火卷帘门机)
(rated-load 300kg/500kg/600kg, single phase/three phase fireproof motor)



型号:FJJ809-3P-JLFH (800/1000)
(额载800kg/1000kg单/三相防火卷帘门机)
(rated-load 800kg/1000kg, single phase/three phase fireproof motor)



型号:FJJ1617-3P-JLFH (1300/1500)
(额载1300kg/1500kg三相防火卷帘门机)
(rated-load 1300kg/1500kg/600kg, single phase/three phase fireproof motor)



型号:FJJ2450-3P-JLFH (2000)
(额载2000kg三相防火卷帘门机,洞外式安装)
(rated-load 2000kg, three phase fireproof motor for out-door installation)

FJJ Fire motor specifications and technical parameters
FJJ 产品系列主要型号、规格及技术参数表

型号规格 Model	额定输出转矩 (N·m) Rated output torque(N·m)	额定输出转速 (r/min) Rated output speed(r/min)	电机功率 (W) Motor power (W)	额定电压/频率 (V/Hz) Rated voltage/frequency (V/Hz)	额定电流 (A) Rated current (A)	持续工作时间 (min) Con inued work time (min)	标定卷升参数 Standard roll up parameter 卷筒外径 (mm) Drum dube outer diameter (mm)	最大提升力 (kg·f) Maximum Lifting power (kg·f)	最大提升高度 (m) Maximum lifting height (m) 帘片厚度 (mm) Profile thickness(mm) 15	20
三相交流防火卷帘用卷门机 Three phase 3P fireproof m tor										
FJJ 168-3P	168	5.0	250	380/50	1.5	15	114	300	6	7
FJJ 225-3P	225	4.2	130	380/50	0.75	15	114	400	6	7
FJJ 343-3P	343	4.8	250	380/50	1.5	15	140	500	6	7
FJJ 412-3P	412	4.8	250	380/50	1.5	15	140	600	6	7
FJJ 647-3P	647	4.0	370	380/50	2.3	15	165	800	7	8
FJJ 809-3P	809	3.5	370	380/50	2.8	15	165	1000	6	7
FJJ 1401-3P	1401	4.4	850	380/50	3.2	15	219	1300	7	8
FJJ 1617-3P	1617	5.2	1000	380/50	3.8	15	219	1500	8	9
FJJ 2450-3P	2450	3.8	1000	380/50	4.0	15	245	2000	12	13

The FJJ is model of main motor, if for a compelet set shoul add JLFH for fire door motor, or JLSL for double curtain door motor, and DWWS for one motor drive two doors motor .
注：上述防火系列产品为主机型号，整机（含配件）分为单帘防火（JLFH）系列规格、无机双帘（JLSL）系列规格及一拖二（DWWS）系列规格。

FJJ-JLSL/DWWS
DOUBLE CURTAIN FIRE DOOR OPENER
FJJ-JLSL/DWWS无机双帘防火卷帘门电机



型号:DWWS-412～2450-3P
(额载600kg～2000kg)
洞外式无机双帘三相防火卷帘用开门机(单轴)
(rated-load 600-2000kg,three phase fireproof motor)
DWWS motor accessories: bracket board, 2 Side board, a big sprocket wheel, 2small sprocket wheel, 6discs, a chain, 2 bearing, 2 shaft









型号:FJJ412-2450-3P
(额载300kg～2000kg)
无机双帘三相防火卷帘用开门机(双轴)
(rated-load 300-2000kg,three phase fireproof motor)



JLSL MOTOR ACCESSORIES:

bracket board, Side board, a big sprocket wheel, a small sprocket wheel, stretching wheel, 6 discs, a chain, a bearing, a shaft

JLSL无机双帘防火卷帘门机随机配置附件有：

主附加板链轮组件、张紧轮组件、附板、从附加板、轴承座、附板轴承、传动板2片(重型3片)、支承板4片、芯轴、链条。

JL36 INTELLIGENT FIRE SHUTTER CONTROL SYSTEM

JL36型智能防火卷帘控制器

CONTROL SYSTEM FEATURES:

- Made of advanced microchip technology, with25 program function.
- Circuit capacity reaction quickly.
- There are multiple plug socket can be connect with smoke sensor, temperature sensor and the fire center control signal linkage.
- There are multiple fault detection, and fault parts display, with sound light larm function.
- With phase sequence detection, and overload protection, phase correction.
- Power backup, can be working when power off.
- Easy to install.



Rated voltage:
Three-phase: AC 380V
Single phase: AC 220V
Frequency: 50HZ
Power backup: DC12V

额定电压:
三相：AC 380V
单相：AC 220V
频率：50HZ
储备电源：DC12V

控制器性能特点

- 采用先进微处理器技术，信息处理量大、抗干扰能力强，具有25种程序功能。
- 主控回路容量大，反应迅速、可靠，工作精度高。
- 控制系统具备多种接口，可接收烟感、温感及消防中心操控信号联动，并向消防控制中心反馈状态、故障等信息联络。
- 具有多种故障检测、故障部位显示等声光报警功能。
- 具有相序自动检测，纠正和短路、缺相过载保护功能。
- 内置储备电源，在断市电状态下,仍可检测烟温感信号、消防中心信号，并依信号驱动卷门速放、中停、关闭等程序动作。
- 控制器系统设置的指示标识简明易懂，安装、调试方便快捷。

AVAILABLE OPTION FOR JL-FJJ/WSFJ/DWWS SERIES DEVICES:
可供选配与JL-FJJ/WSFJ/DWWS 三种系列产品配套的功能、器件：



Fire fuse:68℃±3℃
WBK-2型

WBK-2型温控释放装置：
动作温度:73℃±0.5℃



Fire fuse:73℃±0.5℃
WK-2型

WK-2型温控释放装置：
动作温度:73℃±0.5℃



Smoke And Temperature Sensors
烟感、温度感应器



SD-36 type electronic lock box
SD-36型电子锁盒:



Safety brake
卷帘门刹车安全器

DYG SMOKE PROTECT SCREEN TUBULAR MOTOR

DYG挡烟垂壁用管状卷帘机系列

The SMOKE PROTECT SCREEN can be used for prevent the smoke spread when the fire happened. It must install with control system.

主要用途：与智能防火卷帘控制器配套使用，对建筑物内发生火灾时为封闭、隔断火险区域的烟、火灾等配置装备的防火卷帘进行智能化驱动控制，广泛适用于楼宇、车库、商场、厂房、仓库、码头、机场等建筑场所，是现代建筑物的安全防火的理想配套产品。



DYG 45-35/12
DYG 45-50/12

DYG accessories: mounting plate, socket, plug, electronic lock box

DYG挡烟垂壁管状卷帘机随机配置附件有：安装板、梅花孔插座、附板、尾插、电子锁盒。



DY-02 electronic lock box

DY-02型电子锁盒

PRODUCTS FEATURES:

- Made by high quality material spare parts to be used for high temperature working condition.
- Powerful, good running, long service life design by fire standard with refractory heat protection.
- Motor with fireproof protection.
- When power off it can release down by gravity.

产品性能特点

- 完全具备“JLG系列管状卷帘电机”的工作功能，为应对高温极端环境工况，产品采用了高品质零部件、电气元件，整机质量稳定、更强劲有力、运行更平稳、可靠性更好、寿命更长。
- 按防火标准设计、规范制造，整机具备耐火耐热防护。
- 电气控制部分分体外挂,电气性能更可靠、安全。
- 外挂智能控制器，控制卷帘机运行更精确。
- 产品既可电动升降也可在断电时打开电磁离合依自重下降。

DYQ-G-500 SMOKE PROTECT SCREEN CONTROL SYSTEM

DYQ-G-500型挡烟垂壁控制器

Rated voltage:
Single phase: AC 220V
Frequency: 50HZ
Output power: 500W
Power backup: DC12V

额定电压:
单　相：AC 220V
频　率：50HZ
输出功率：500W
储备电源：DC12V



JL-DYQ phase motor specifications and technical parameters
JL-DYQ 产品系列主要型号、规格及技术参数表

型号规格 Model	额定输出转矩 (N·m) Rated output torque(N·m)	额定输出转速 (r/min) Rated output speed(r/min)	电机功率 (W) Motor power (W)	额定电压/频率 (V/Hz) Rated voltage/frequency(V/Hz)	额定电流 (A) Rated current (A)	限位圈数 Limit circle	机管外径 (mm) Tube Outside diameter(mm)	机管长度 (mm) Tube length (mm)	标定卷升参数 Standard rollup parameter	
									卷筒直径 (mm) Drum tube diameter(mm)	最大提升力 (kg·f) Maximum lift (kg·f)
DYG 45-35/12	35	12	310	220/50	1.20	30	45	593.5	Φ88/Φ84	70
DYG 45-50/12	50	12	310	220/50	1.35	30	45	623.5	Φ88/Φ84	100

INDUSTRIAL DOOR OPENER SERIES

工业门开门机系列

Main Appilications:

Widely applicable to places of building, garage, shopping malls, hotels, factories, warehouses, docks, airports and so on, it is a best choice of door opener.


主要用途：广泛适用于楼宇、车库、商场、宾馆、工厂、仓储、码头、机场等建筑物场所，是各行各业生活、生产首先理想的电动门控产品。

PRODUCTS FEATURES:

- The opener is composed of motor, gearbox, manual release mechanism and control system.
- Using high efficiency worm reducer, large speed ratio, high efficiency, low power, safety and good self-locking.
- The closed transmission system using advanced lubricating oil sealing, lubrication, low noise, long use life, no pollution.
- The built-in control system with remote control, manual control, limiting accurate, convenient adjustment, easy operation.
- The motor with thermal protection and overload automatic shutdown protection function.
- Nice design, beautiful appearance, compact structure, small volume.
- The suitable working environment temperature is between -20℃~55℃, IP54 protection class with stable performance and safety.
- Some customized special specifications for customer request.

主要特征

- 整机由电动机、变速箱、手动机构和控制器四部分组成。
- 采用高效蜗轮蜗杆减速机构，速比大、效率高、功率低、自锁可靠、安全性好。
- 密闭式变速箱传动系采用高级润滑油密封润滑，工作噪音低、使用寿命长、无环境污染。
- 整机内置智能控制系统，集遥控、墙控、手动于一体，限位精确，调整方便、操作舒适。
- 主机具热保护和过载自动停机保护等功能。
- 产品外观设计款式新颖、美观大方、结构紧凑、体积小不占空间。
- 适用的工作环境温度-20℃~55℃，防护等级IP54，具有性能稳定、安全可靠、经久耐用等优点。
- 可依用户个性需求，定制特殊规格和配置的各类拓展型产品。

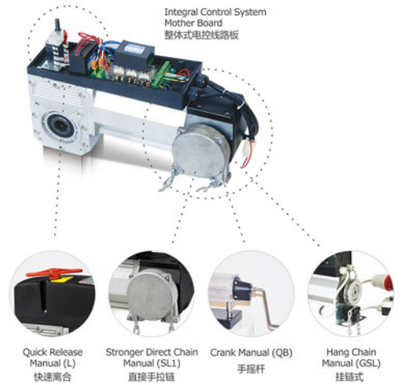

PRODUCTS FEATURES:

- With 4 standard mechanical rotary limit switches, based on user requirements increase to 6 limit switch or optional electronic positioning.
- There are three manual release modes can be choose: Direct chain manual release (SL1), indirect chain manual release (GSL) and the crank manual release (QB).
- There is a group of peripheral interface, can connect with infrared photocell, safety edge switch and door safety protection device.
- There are two model control system: built-in control panel and separate control box,

性能特点

- 标配采用机械回转式限位开关4个，可依用户要求增配至6个限位开关或可选配电子定位。
- 三种手动模式供选择：直接链条手动(SL1)、间接链条手动(GSL)和曲柄手动(QB)。
- 控制器备有一组外设接口，可插接红外保护、压力电波开关或门中门保护等安全器件。
- 控制器两种结构供选择：整体式(控制器直接安装在主机上)和分体式(控制器以控制箱形式，外挂安装在墙壁上)。

GKH1/GKH2
SECTIONAL DOOR OPENER
GKH1/GKH2工业滑升门开门机产品系列

APPLICATION:
GKH1/GKH2 sectional door opener can be used for torsion spring balance industrial doors.
The opener can be installed by directly drive (shaft drive), also can be installed by indirect drive (by the other chain sprocket drive).

适用范围：
GKH1/GKH2 工业滑升门开门机产品系列适用于带扭簧平衡系统的工业滑升门。
开门机可安装直接驱动(轴驱)，也可安装间接驱动(通过侧边增加一链轮链条传动)。

PERFORMANCE CHARACTERISTICS:
- GKH1 can lift 400kg door weight (door height 7 meters).
  GKH2 can lift 600kg door weight (door height 7 meters).
- The optional quick release mechanism.

性能特点
- GKH1可提升重达400kg的门(门洞高7米)；GKH2可提升重达600kg的门(门洞高7米)。
- 可选配门快速启闭机构，通过撬纵杆操控离合器啮合或分离，必要时可完全脱开传动机构，让人工直接拉动弹簧平衡的门板实现开启或关闭或在任意位置停止。



GKH1滑升门机,电控一体、间接手动(LT1)
GKH1 Sectional Door Opener
System, Indirect Chain release(LT1)



GKH1滑升门机,电控一体、直接手动(LT2)
GKH1 Sectional Door Opener
System, direct Chain release(LT2)



GKH1 滑升门机，电控分体、快速离合(L)
GKH1 Sectional Door Opener
Separate Control System,Quick Release(L)

JL-GKH sectional door opener specifications and technical parameters
JL-GKH工业滑升门开门机系列主要型号、规格及技术参数表

型号规格 Model	额定输出转矩 (N·m) Rated output torque (N·m)	额定输出转速 (r/min) Rated output speed (r/min)	主电机转速 (r/min) Motor speed (r/min)	电机功率 (W) Motor power (Kw)	工作电压/频率 (V/Hz) Rated voltage /frequency (V/Hz)	额定电流 (A) Rated current (A)	控制电压 DC (V) control voltage (VDC)	噪声压级 (dB) noise pressure level (dB)	负载周期率(%) Load cycle rate(%)	输出轴工作限位圈数 Limit number of output shaft	输出轴孔径 (mm) output shaft diameter (mm)
GKH1-100/22-3P	100	22	1250	500	380/50	2.2	24	65	25	18	25.4
GKH1-50/22-1P	50	22	1250	370	220/50	3.1	24	68	15	18	25.4
GKH2-150/17-3P	150	17	1250	650	380/50	2.5	24	65	40	20	30/31.75
GKH2-100/17-1P	100	17	1250	550	220/50	4.5	24	68	25	20	30/31.75

GKJ2/GKJ3
INDUSTRIAL DOOR OPENER
GKJ2/GKJ3工业门开门机系列产品

APPLICATION:
GKJ2/GKJ3 industrial door opener can be used for industrial rolling door but also for no torsion spring balance industrial doors.
The opener can be installed by directly drive (shaft drive), also can be installed by indirect drive (by the other chain sprocket drive).

适用范围：
GKJ2/GKJ3 工业门开门机系列产品适用于工业卷帘门，也可用于不带扭簧平衡系统的工业滑升门。
开门机可安装直接驱动(轴驱)，也可安装间接驱动(通过侧边增加一链轮链条传动)。

PERFORMANCE CHARACTERISTICS:
- The opener can lift door up to 6 meters.
- There is a device of drop down protection , do not need other safety brake.

性能特点
- 开门机可提升门的门洞升高最大可达6米。
- 内部设置有防坠落机构，不需要再配置防坠落的安全器。



GKJ2卷门机,电控分体、直接手动(LT2)
GKJ2 rolling door drive,separate
control system, direct manual (LT2)



GKJ3卷门机,电控分体、直接手动(LT2)
GKJ3 rolling door drive, separate
control system, direct manual (LT2)



分体式电控箱
Separate Control System

JL-GKJ Rolling shutter door drive specifications and technical parameters
JL-GKJ工业卷门机系列主要型号、规格及技术参数表

型号规格 Model	额定输出转矩 (N·m) Rated output torque (N·m)	额定输出转速 (r/min) Rated output speed (r/min)	主电机转速 (r/min) Motor speed (r/min)	电机功率 (W) Motor power (Kw)	工作电压/频率 (V/Hz) Rated voltage /frequency (V/Hz)	额定电流 (A) Rated current (A)	控制电压 DC (V) control voltage (VDC)	噪声压级 (dB) noise pressure level (dB)	负载周期率(%) Load cycle rate(%)	输出轴工作限位圈数 Limit number of output shaft	输出轴孔径 (mm) output shaft diameter (mm)
GKJ2-150/18-3P	150	18	1250	750	380/50	2.2	24	65	40	15	30/31.75
GKJ2-220/12-3P	220	12	1250	750	380/50	2.4	24	65	40	15	30/31.75
GKJ3-260/16-3P	260	16	960	1100	380/50	3	24	65	40	15	40
GKJ3-400/11-3P	400	11	960	1100	380/50	3.2	24	65	40	15	40

ECRS ROLLER SHUTTER DOOR OPENER
ECRS机电分离式卷门机



NEW FEATURES:

- Electromechanical separate rolling machines, which uses separate execution module and control module approach
- With wireless remote control, external manual switch, external optical protection switching function;
- Easy maintenance: Can do the independent maintenance on the control part only, so as to avoid the trouble of disassemble the whole machine
- Low logistics cost: With any problem, just send back the control box, but not need to send the whole machine, save the logistics cost.

新品特点

- 机电分离式卷帘机，其采用执行模块与控制模块分离的方式，
- 具有无线遥控、外接手动开关、外接光电保护开关功能；
- 维护方便：可对控制部分独立维修，从而免去拆卸整机的麻烦；
- 物流成本低：只需把控制盒寄回维修即可，省去寄整机的麻烦及节省物流费用；



Control panel separated motor
机电分离式卷门机



Control Panel With Remote Control
控制部分含遥控器

GKHDC SECTIONAL DOOR OPENER
GKHDC 直流滑升门开门机

The DC Sectional door opener is a new product, it brings the brushless DC motor technology to the original sectional door opener, with advantage in the control system of brushless motor. It is used in the sectional door with torsion spring balance.

直流滑升门机是最新研发的一款性能优越、功能完备的滑升门机。它将直流无刷电机技术运用到工业滑升门机上，充分发挥了无刷电机在控制上的优势，在国内外均属首创。它主要用于厂矿企业的车间、仓库、物流中心等场所安装有扭簧平衡的滑升门上。

NEW FEATURES:

- Slow start, slow stop.
- Built-in encoder.
- The LCD status display.
- Rebound blocked.
- If power off can search base point automatically.
- With all the normal function of the ordinary control system.

新品特点

- 缓启动，缓停止。
- 内置编码器。
- LCD液晶显示屏。
- 遇阻反弹。
- 如遇停电可自动搜寻基础定位点。
- 并具有其他工业门机的控制功能。







DC Opener Main Technical Parameters
主要技术参数表

型号 Model	输出扭矩 Rated torque Nm	输出转速 Rated speed r/min	电压/赫兹 Operating power V/Hz	马达功率 Motor power Kw	马达电流/A Motor current rating A	控制电压 Control voltage DC	S3工作制 S3 Duty cycle %	S2工作制 S2 Duty cycle Min	限位器圈数P Limit switch range R	防护等级IP Protection grade IP	噪音等级 Noise pressure level (dB)	环境温度 Temperature range C	输出轴尺寸 Sleeve shaft mm
GKHDC-65/22	65	22	230/50	0.5	3	24	20	10	19	54	<65	-20/+45	25.4
GKHDC-100/22	100	22	230/50	0.8	5.5	24	20	10	19	54	<65	-20/+45	25.4

OTHER PRODUCTS
其他产品



SWING GATE OPENER
平开门机

PERFORMANCE CHARACTERISTICS:

- The intelligent life go wall gate door machine type.
- The design of an automatic locking mechanism, driving, locked freely; host installed in the door hinge side away from the action, energy saving, reliable, high efficiency.
- The configuration of intelligent controller (AC and DC) to realize remote control, automatic detection, alarm and intelligent operation.
- Has complete functions, large starting torque, compact structure, convenient installation and other excellent characteristics.
- The 0 ~ 180 degrees - wide angle to open the door.
- The power failure, can easily switch from the electric state to the manual state through the special key switch.
- And the time sequence of open, closed adjustable, single, double door selection.
- The resistance automatically stop, and return back when the door is closing.
- The infrared, UPS interface.
- The running time protection (adjustable).

产品性能特点

- 走轮式的智能化院墙大门开门机。
- 设计有自动锁定机构，驱动、锁定自如；主机安装在大门远离铰链一侧，动作高效、省电、可靠；
- 配置有智能控制器(交直流两用)实现遥控、自动检测识别、报警等智能化运行。
- 具有功能齐全、启动力矩大、结构紧凑、安装方便等优异特点。
- 0～180度超广角度开启大门。
- 停电时，通过专用钥匙开关能方便的从电动状态切换为手动状态。
- 顺序开、关门及时间可调，单、双开门选择
- 遇阻自动停止，并返回（关门时）
- 红外线、UPS接口
- 运行时间保护（可调）



JL Swing Gate Opener Controller
Running time: 50 seconds single protection
Opening time difference: 1
Environment temperature: - 30℃ ~ 60℃
Remote control distance: 50m
Frequency: 315MHZ
Configuration Power: 35W × 2
Voltage: AC220V ± 10%
Working voltage: DC24V

JI平开门机控制器
运行保护时间:单次50秒内
开门时间差:1秒
环境温度: - 30℃ ~ + 60℃
遥控距离:50m内
频率:315MHZ
配置功率:35W×2
市电电压:AC220V±10%
工作电压:DC24V

JL swing gate opener motor specifications and technical parameters
JL平开门机主要型号、规格及技术参数表

型 号	电机功率 (W) Motor power (W)	额定电压 AC／DC (V) Rated voltage AC/DC (V)	工作参数				
			使用环境温度 (℃) Work environment (℃)	开关门推力 (N) Closing the door thrust (N)	升降落差 (mm) Lifting gap (mm)	运行速度 (m／min) Running speed (m/min)	遥控距离 (mm) Remote control distance (mm)
PKM160	35×2	220/24	-40～+50	500	0～300	10～15	50

JLG
TUBULAR MOTOR
JLG管状卷帘电机系列

JLG tubular shutter motor series are widely used in residential, garage, shopping malls, hotels and other places of the shutter doors and windows and sunshade, tent machine, screen machine device for opening and closing; It also widely used in the new field which brings great convence for people`s life.

JLG管状卷帘电机系列广泛适用于住宅、车库、商场、宾馆等场所的卷帘门窗以及遮阳棚、帐篷机、银幕机等装置的启闭；它还被不断的应用于各类新的领域，为人们的生活带来了极大的便利。

PERFORMANCE CHARACTERISTICS:

- The whole transmission multi-stage planetary gear transmission, large speed ratio, compact structure, small volume, low noise.
- The installation of the product will be the main body directly inserted in the door / window reel, good concealment and does not occupy space, keep buildings comfortable environment and beautiful decoration.
- The operation of remote control (optional remote control), wall control, manual operation, precise spacing, convenient adjustment, comfortable to manipulate.
- The configuration of the torsion spring, increase the door (window) curtain roll-up ability.
- The optional reserve power supply, avoid cannot open the door (window) when power failure.

产品性能特点

- 整机变速多级行星齿轮传动，速比大、结构紧凑、体积小、工作噪音低
- 产品安装将主机体直接插入在卷帘门/窗的卷筒内，隐蔽性好且不占空间，保持建筑物的宜人环境和美观装饰
- 运行可遥控(选配遥控器)、墙控、手动操作，限位精确，调整方便、操控舒适
- 可配置扭簧，加大启闭门(窗)帘的卷升能力
- 可选配储备电源，避免停电时无法开启门(窗)帘



JLG tubular motor specifications and technical parameters
JLG管状卷帘机系列主要型号、规格及技术参数表

型号规格 Model	额定输出转矩 (N·m) Rated output torque (N·m)	额定输出转速 (r/min) Rated output speed (r/min)	电机功率 (W) Motor power (Kw)	额定电压/频率 (V/Hz) Rated voltage /frequency (V/Hz)	额定电流 (A) Rated current (A)	连续工作时间 (min) continuous working time (min)	限位圈数 Limit number	机管外径 (mm) Pipe diameter (mm)	机管长度 (mm) Pipe length (mm)
JLG45-20/12	20	12	240	220/50	0.90	4	30	45	580
JLG45-50/12	50	12	300	220/50	1.35	4	30	45	623.5
JLG59-80/12	80	12	350	220/50	1.50	4	30	59	630

CENTRAL MOTOR
中装卷门机

PERFORMANCE CHARACTERISTICS:

- Suitable for light rolling shutter or rolling door which with torsional spring balance system.
- The machine equipped with intelligent controller, has the characteristics of complete functions, simple installation, reliable operation, long service life etc..
- And optional plug-in reserve power supply, alarm system, infrared system and other functions related products, to adapt to different customer needs

产品性能特点

- 适用于轻型卷帘或带扭簧平衡系统的卷门。
- 整机配置有智能控制器，具有功能齐全、安装简捷、运行可靠、寿命长等特点。
- 并可选配插接储备电源、报警系统、红外对射系统等功能配套产品，适应不同客户需求。



Central motor specifications and technical parameters
中装卷门机主要型号、规格及技术参数表

型 号 Model	额定功率 (W) Rated power (W)	额定电压/频率 (V/Hz) Rated voltage /frequency (V/Hz)	最大提升力 (kg·f) Maximum lifting force (kg·f)	空载转速 (rpm) No-load speed (rpm)	负载转速 (rpm) Overload speed (rpm)	最大提升高度 (m) Maximum lifting height (m)	使用环境温度 (℃) Work environment (℃)
CM150	360	230AC/50～60	130	10.5	8.5	7	-20～50

SLIDING GATE OPENER
平移门机

PERFORMANCE CHARACTERISTICS:

- Has large starting torque, stable and reliable operation, beautiful appearance, convenient installation advantages of repair.
- The configuration of intelligent controller, stable operation, parking without inertia, accurate limit.
- The ultra low voltage operation, working voltage in 150V, more than the original design output power is up to 50%, more than 180V can work normally.
- Security friction clutch set of door opening machine, when the load exceeds the set value or a starting clutch friction encountered obstacles, motor idling.
- Overheat protector set of motor, motor over working hours of continuous operation for a period of time after the temperature reaches the set value.
- Motor power into the automatic protection, temperature recovery. Prolonging the service life of the motor.
- This machine is equipped with a fast clutch, power only when theclutch handle can be rotated 100 degrees to human push door.
- This machine adopts the advanced lubricating oil, or add lubricating oil without replacement.

产品性能特点

- 具有起动力矩大、运行平稳可靠、外型美观、安装维修方便等优点。
- 配置有智能控制器，整机运行平稳，停车无惯性，限位准确。
- 可超低压运行，工作电压在150V时，输出功率仍可达原设计的50%以上，180V以上即可正常工作。
- 开门机内设置安全摩擦离合器，当负荷超过设定值或遇障碍物时摩擦离合器启动，电机空转。
- 电机内部设置过热保护器，电机超过工作时限连续运行一段时间后温度达到设定值时，电机自动断电进入保护状态，降温可恢复工作。延长电机使用寿命。
- 本机设有快速离合器，停电时只需将离合手柄旋转100度即可人力推动大门。
- 本机采用高级润滑油，无需更换或添加润滑油。



JL sliding gate opener motor specifications and technical parameters
JL平移门机主要型号、规格及技术参数表

型 号 Model	额定功率 (W) Rated power (W)	额定电压/频率(V/Hz) Rated voltage /frequency (V/Hz)	启动电流 (A) Start current (A)	额定输出转速 (r/min) Rated output speed (r/min)	工作参数			
					开关门拉力 (kg·f) Switch the door pull (kg·f)	适应门重 (kg) Fit door weight (kg)	适用门跨 (mm) Adaptation across the (mm)	运行速度 (m/min) Running speed (m/min)
PYM-370	370	220/50	3	46.6	150	≤1000	≤15	12～20
PYM-550	550	220/50	3	46.6	180	≤1500	≤20	12～20

SPRING BALANCED
DOOR OPENER(AUSTRALIAN DOOR OPENER)
弹簧平衡门机(澳式门机)

This series of products for rolling door with a torsional spring balance system. Has the characteristics of complete functions, simple installation, reliable operation, long service life etc.. With optional plug-in reserve power supply, alarm system, infrared system and other functions related products, to adapt to different customer needs.

本系列产品用于带扭簧平衡系统的卷门。具有功能齐全、安装简捷、运行可靠、寿命长等特点。整机配置有智能控制器，采用直流电机驱动，安全电压DC24V。并可选配插接储备电源、报警系统、红外对射系统等功能配套产品，适应不同客户需求。

PERFORMANCE CHARACTERISTICS:

- The running speed fast, low noise.
- In the uplink, downlink rebound resistance function stops.
- The door body running with working lamp.
- Open the door after the automatic time delay closing function.
- The operation and setting manual or remote control.



产品性能特点

- 运行速度快，噪音小。
- 有上行遇阻停止、下行遇阻反弹功能。
- 门体运行时带有工作照明灯。
- 门体开启后有自动延时关门功能。
- 可手控或遥控方式操作与设置。

AVAILABLE OPTION FOR JLG AUSTRALIA STYLE MOTOR SERIES DEVICES:
可供选配与JL弹簧门机产品配套的功能、器件：



JLG Australia style motor specifications and technical parameters
JL弹簧平衡门机(澳式门机)主要型号、规格及技术参数表

型 号 Model	电机最大拉力 (N) maximum motor rally (N)	提升速度 (m/s) lifting speed (m/s)	电机功率 (W) Motor power (W)	待机功率 (W) Standby power (W)	额定电压/频率 (V/Hz) Rated voltage /frequency (V/Hz)	工作参数 Working parameters				
						噪声压级 (dB) noise pressure level (dB)	工作环境温度(℃) Work environment (℃)	最大提升高度(m) maximum lifting height (m)	最大门体面积(m^2) Maximum gate area (m^2)	遥控距离 (m) Remote control distance (m)
JL-THM-600	600	0.1～0.14	90	≤5	220/50	<55	-20/+60	≤2.5	≤8	≥50
JL-THM-800	1000	0.1～0.14	150	≤5	220/50	<55	-20/+60	≤3	≤12	≥50

OPTIONAL PRODUCTS
选择性配套产品

REMOTE CONTROL 遥控器

Remote Control: configure install the remote control, the implementation of the multi-function remote control operation of the electric door machine, but also can expand to the plug lighting, power reserve, infrared shooting, wireless door sensor, automatic alarm function devices can be easily and comfortable manipulation electric door, very convenient and safe. Jielong have a variety of remote control options available to customers.

遥控器：配置安装遥控器，可对电动门机实施多功能遥控操作，还可拓展插接照明、储备电源、红外对射、无线门磁、自动报警等功能器件，可轻松、舒适地操控电动门，非常方便、安全。杰龙备有多款的遥控器可供客户选择。



YKQ-988-S (fixed code)

YKQ-988-S(固定码基本型)
适用于杰龙普通常配型卷帘门电机



YKQ-988-X (multifunctional learning code)
To be used with Jielong rolling door motor,
optional: alarm device (J), reserve power supply(C),
infrared photocell (H), door sensor switch (M) f

YKQ-988-X(学习码多功能)
适用于杰龙普通常配型卷帘门电机,
可选配报报警器(J)、储备电源(C)、
红外对射(H)、门磁开关(M)等功能插口。



YKQ-988-G (rolling code type)
To be used with Jielong rolling door motor

YKQ-988-G(滚动码基本型)
适用于杰龙普通常配型卷帘门电机



Jielong tubular motor remote control (single rolling code)

管状电机遥控器(单龙滚动码)

LOCK BOX 杰龙锁盒

Jielong lock box is used to install the button switch on the wall, and can lock button switch to prevent wrong operation, it is beautiful and safe.

杰龙锁盒用于把主机的按钮开关固置于墙上，并可将按钮开关上锁，有效防止启动开关被不期或恶意触动和操作，既美观又安全。有5种型式、规格供用户选配。



Double-layer stainless surface lock box:
to be used for shutter doors motor

双层普通不锈面锁盒:
适用于普通卷帘门 门



Single-layer stainless steel surface fireproof lock box :
to be used for shutter doors motor

单层不锈面防火锁盒:
适用于普通卷帘门



SD-36 type electronic lock box:
To be used for PJK-SD-JL36 fire shutter controller

SD-36型电子锁盒:
专用于配置PJK-SD-JL36型防火卷帘控制器



DZ-A type of electronic lock box:
To be used for A2 fire shutter controller

DZ-A型电子锁盒:
专用于配置A2型防火卷帘控制器



DY-02 vertical wall controller smoke screen electronic lock box:
Dedicated to supporting the JL-DYQ-G-DC012-500 Smoke

DY-02型竖墙面电子锁盒:
专用于配置JL-DYQ-G-DC012-500型防烟垂壁控制器

RESERVE POWER SUPPLY 储备电源

Jielong reserve power supply can be used when power failure, so you can still operate the motor open and close the shutter doors, convenient and practical. There are three optional specifications.

- Advanced intelligent fuzzy control, complete automatic maintenance charge protection, discharge protection, power storage automatically maintain battery protection function.
- Blackout automatically switch to the reserve supply.
- Usually the system will automatically be converted to a standby (standby mode, the system without consuming electricity, so that extending the service time of battery when power failure).
- Thermal protection function.

杰龙储备电源用于在断市电时，仍可机动操作启闭卷帘门，方便实用。主要有3种选配规格。

- 采用先进的智能模糊控制，完成自动维护、充电保护、放电保护、蓄电自动维持等电池保护功能。
- 停电时自动切换至储备电源供电。
- 平时本系统将自动转换为待机状态(待机状态下本系统不耗电，从而延长停电时蓄电池的使用时间)。
- 具有热保护功能。



SAFETY BRAKE 刹车安全器

Safety Brake

Used to prevent the rolling door fall down with high-speed .

- when the safety brake running, the power will be cut at same time.
- This device can be used as bearing seat of shutter doors side plate
- can be used between 404 ~ 1017N.m


杰龙卷帘门刹车安全器

用于阻止卷门高速坠落。主要有3种选配规格。

- 能有效制止门帘突然快速下降
- 安全制动器作用时，可切断卷帘电机电源
- 本装置可作为卷帘门的附板端支承座
- 产品涵盖404~1017 N · m



404 brake safety
404型卷帘门刹车安全器



708 brake safety
708型卷帘门刹车安全器



1017 brake safety
1017型卷帘门刹车安全器

TEMPERATURE-CONTROL RELEASE DEVICE 温控释放装置

Jielong temperature-controlled release devices (fire safety fuse) can be used for fire shutter door motor automatically release when there is a fire.

When environment temperature reach the design of fuse, it can release the fire shutter motor's brake by spring force, so that the rolling door can fall down by gravity to block the fire .

杰龙温控释放装置(防火熔断器)是防火卷帘门机在火灾时自动执行速放关闭卷帘的控制装置。主要有2种选配规格。

当环境温度达到设计动作温度以上时，释放装置动作通过弹簧力推动防火卷帘机的制动脱开，让卷门在自重作用下迅速下降隔断火源。



WBK-2型温控释放装置:
动作温度:68℃±3℃

WBK-2型
Fire fuse:68℃±3℃



WK-2型温控释放装置:
动作温度:73℃±0.5℃

WK-2型
Fire fuse:73℃±0.5℃

INFRARED PHOTO CELL 红外线对射器

The Jielong infrared photocell can detect signal and transmitted to the control system to control the door stop operation or return up. The infrared distance from 1 meter to 15 meters; also can be set with remote control together.

杰龙红外线对射器是一组红外线检测系统,会将检测到的信号传递给控制系统,
可实现遇阻反弹，防盗报警等功能。
光控范围1米～15米;
具有超强敏感度，在1秒钟之内发出指令信号，无误动作;
工作性能稳定。



BLOCKED REBOUND DEVICE AND ALARM 遇阻反弹装置与报警器

The Device is installed in the bottom of rolling door two slats,
when something touch the bottom slats, the micro switch send signal to the motor,
the door will reopen to upwards. When the door close normally,
there is a electric magnetic valve will block the door,
it would not open even touch the bottom slats.

遇阻反弹装置安装在卷帘门底梁的两条帘片上,
利用帘片间隙碰触该装置的微动开关发出电感信号给电机,
使电机反向运行重新开启卷帘门。
当卷帘门正常关闭之后，该装置的电磁阀自动锁闭，门体不会因其他触碰而自动开启。



Blocked rebound device
遇阻反弹装置



Alarm buzzer
报警蜂鸣器

JIELONG SERVICE

---PROFESSIONAL, EFFICIENT, CUSTOMER SATISFACTION!

杰龙服务——专业、快捷、让客户满意！





Wherever you are Jielong Always on your side!
不论您在天涯海角　杰龙常在您的身边