

HYD CYL - Ø50 (Bore) X 35(Rod)X 426 (Stroke length) (Single Acting)

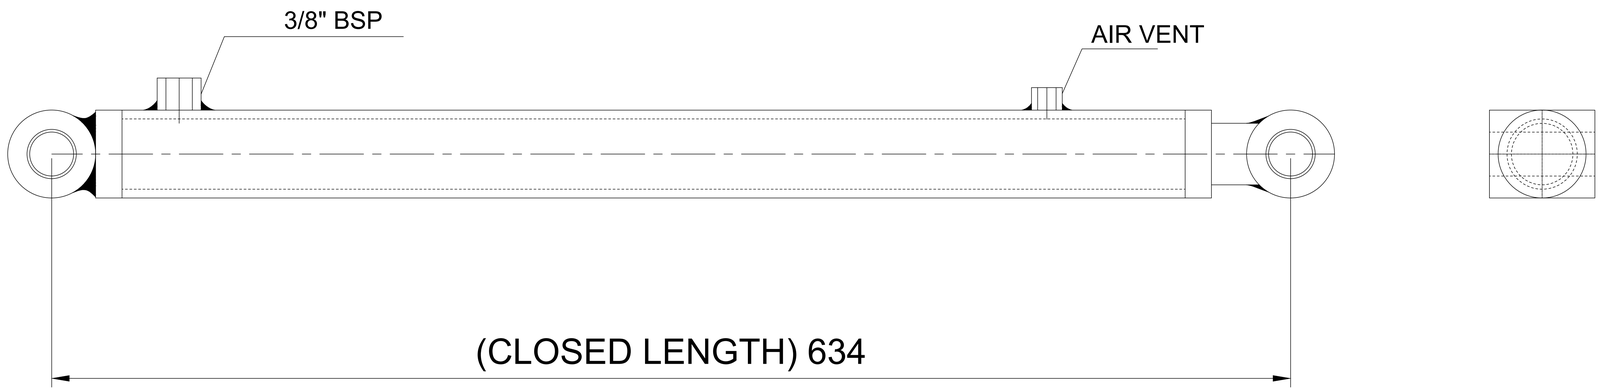

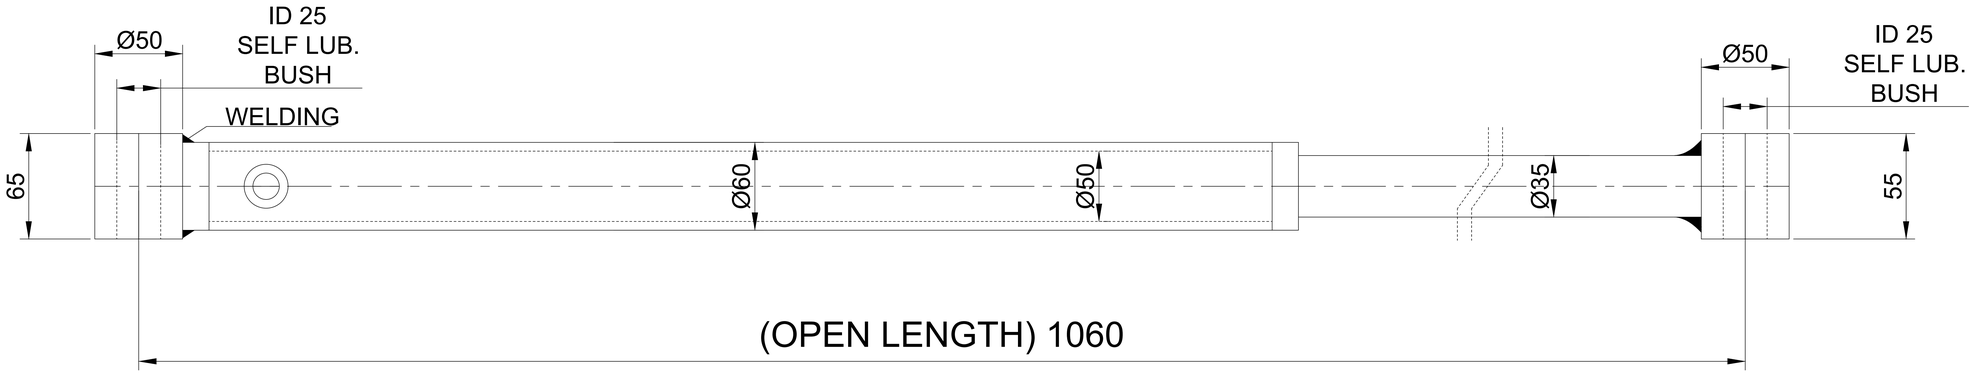

SPECIFICATION :-


- BORE :- Ø50mm
- STROKE :- 426 mm
- PISTON ROD :-Ø35mm
- MOUNTING :-BOTH END CLEVIS
- MEDIUM :-HYDRAULIC OIL
- DESIGN :-WELDED TYPE.(SINGLE ACTING)
- BOTH END PORT CONNECTION :-3/8" BSP
- WORKING PRESSURE :- 200 BAR.
- OPERATING TEMPERATURE :-20 'C TO 100'C (DEPENDING ON SEAL)
- MAX RECIPROCATING SPEED :-12m/min
- STROKE TOLERANCE :-0 TO +1mm
- CYLINDER COATED WITH ONE COAT OF GRAY PRIMER AND ONE COAT OF PAMPAC GRAY PAINT


QUANTITY- 02 NOS

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE			NIHVA TECHNOLOGIES PVT. LTD. PUNE
DECK CYLINDER			NIHVA TECHNOLOGIES PVT. LTD.
	NAME	DATE	Tel : 020 66304033
DRAWN	S.J		Email:- info@nihva.com
CHECK	A.K		Website:- www.nihva.com
APPRD.	V.T		SITE LOCATION - PUNE
If any queries contact : design1@nihva.com			DWG. NO. : NIHVA/23-24/00XX / REV- 0
ALL DIMENSION ARE IN mm			SCALE: NTS / WT: / SHEET: 01 OF 01

HYD CYL - Ø50 (Bore) X 25(Rod)X 140 (Stroke length) (Single Acting)

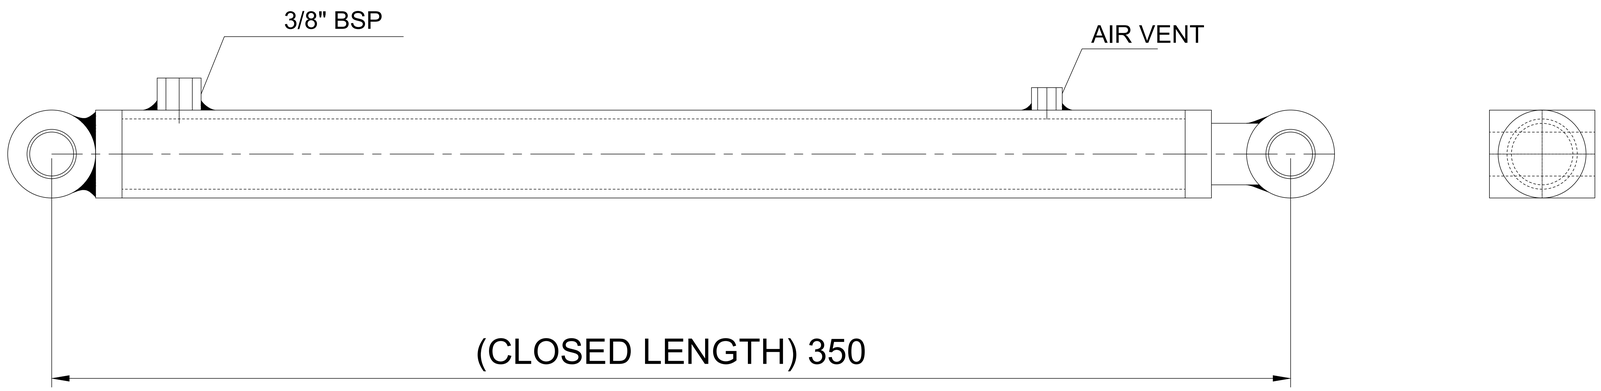

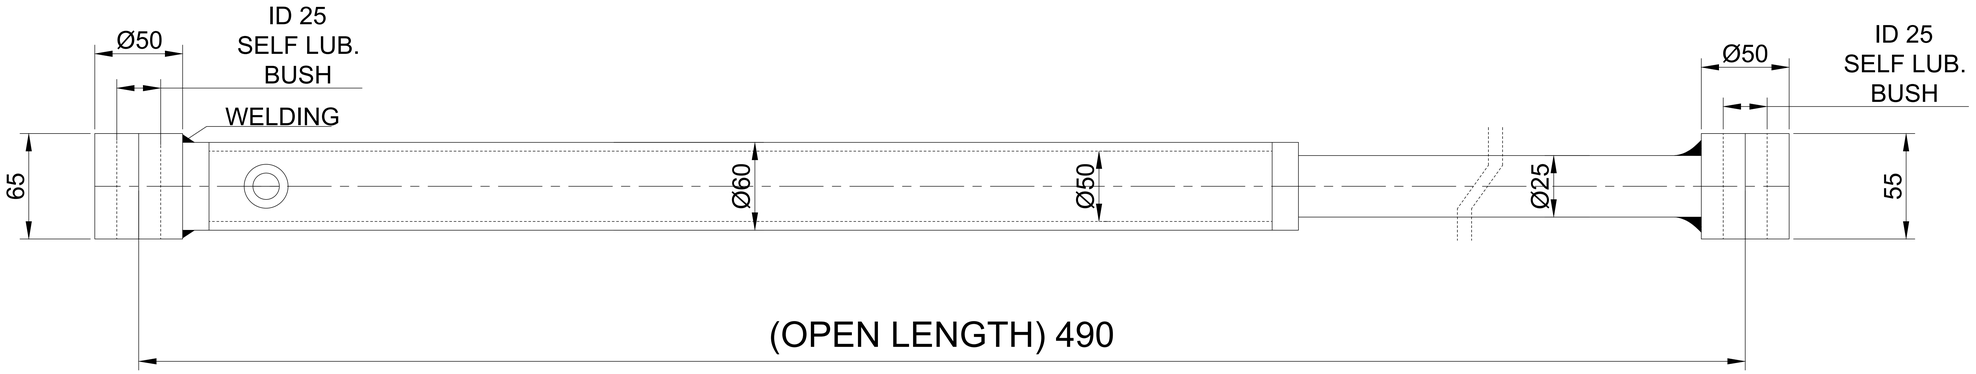

SPECIFICATION :-

- BORE :- Ø50mm
- STROKE :- 140 mm
- PISTON ROD :-Ø25mm
- MOUNTING :-BOTH END CLEVIS
- MEDIUM :-HYDRAULIC OIL
- DESIGN :-WELDED TYPE.(SINGLE ACTING)
- BOTH END PORT CONNECTION :-3/8" BSP
- WORKING PRESSURE :- 160 BAR.
- OPERATING TEMPERATURE :-20 'C TO 100'C (DEPENDING ON SEAL)
- MAX RECIPROCATING SPEED :-12m/min
- STROKE TOLERANCE :-0 TO +1mm
- CYLINDER COATED WITH ONE COAT OF GRAY PRIMER AND ONE COAT OF PAMPAC GRAY PAINT

QUANTITY- 01 NO

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE	LIP CYLINDER		NIHVA TECHNOLOGIES PVT. LTD.
	NAME	DATE	
DRAWN	S.J		
CHECK	A.K		
APPRD.	V.T		SITE LOCATION - PUNE
If any queries contact : design1@nihva.com			DWG. NO. :NIHVA/23-24/00XX — REV- 0
ALL DIMENSION ARE IN mm			SCALE: NTS — WT: — SHEET: 01 OF 01