
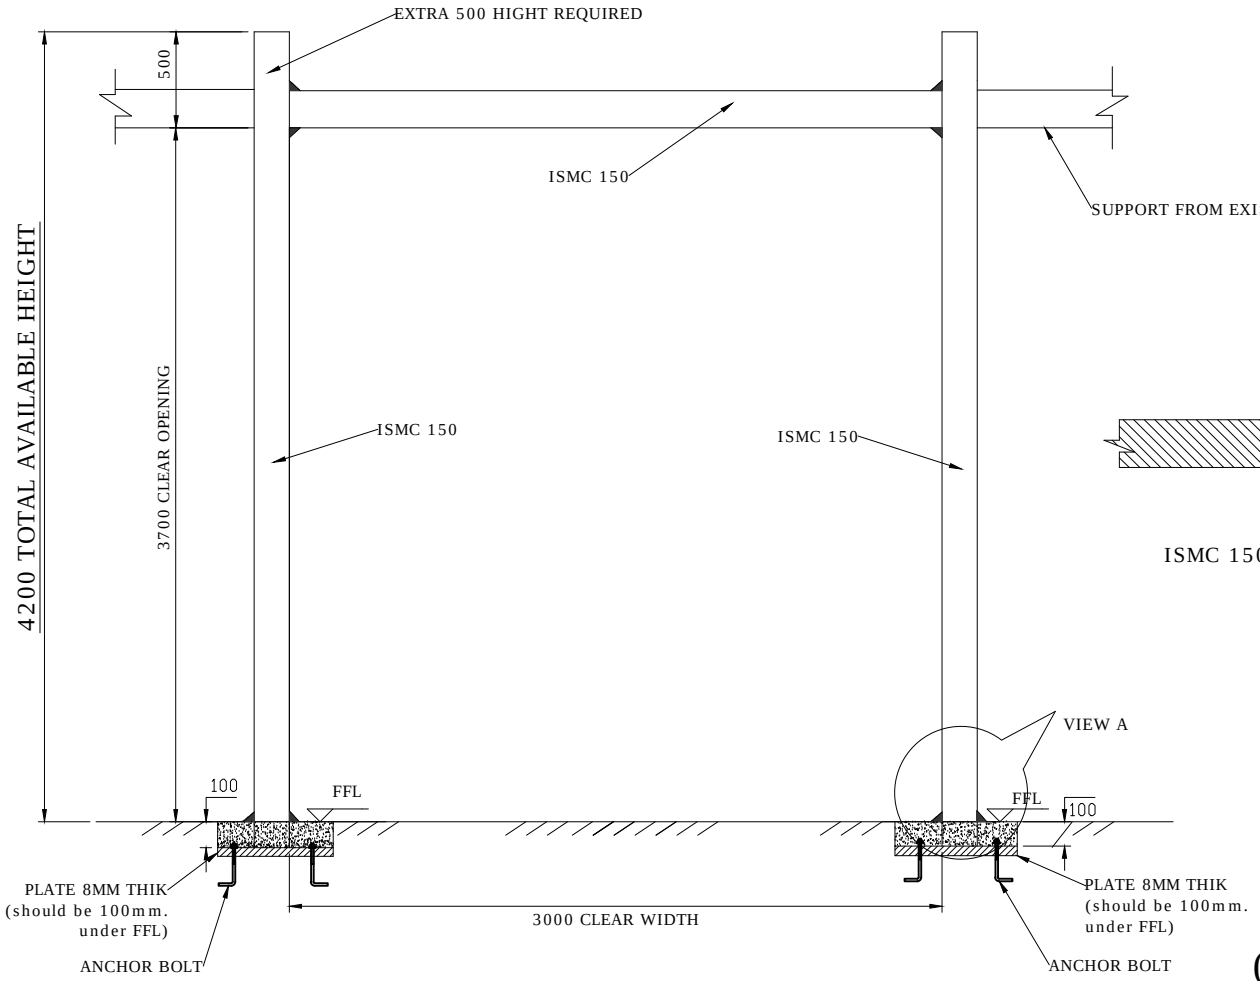


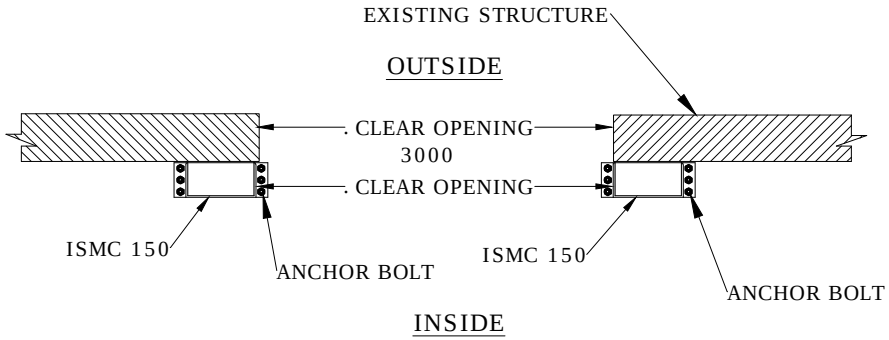

DETAIL VIEW A

(NEW CLEAR OPENING 3000X3700)

structure should be bear approx. 800 k.g. weight. (wind pressure included). While Door is in operation, structure should not be vibrate and bear/sustain all movements of High Speed Doors.

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not be sold or copy to any other concern.

TITLE

STRUCTURE FOR HIGH SPEED DOOR

CLIENT APPROVAL

ALL DIMENSION ARE IN mm

NIHVA TECHNOLOGIES PVT. LTD.

NIHVA TECHNOLOGY PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

	SIGN	DATE	
DRAWN	ABHIJIT	21/07/15	CLIENT -FERRERO
CHECK	ANIL	21/07/15	PROJECT-FERRERO
ENG			SITE -BARAMATI
APPRD.			DWG. NO. - NVA/15-16/060
MFG			SCALE: 01 | WT: | SHEET: 01
Ref. No.			If any queries contact : projects@nihva.com