

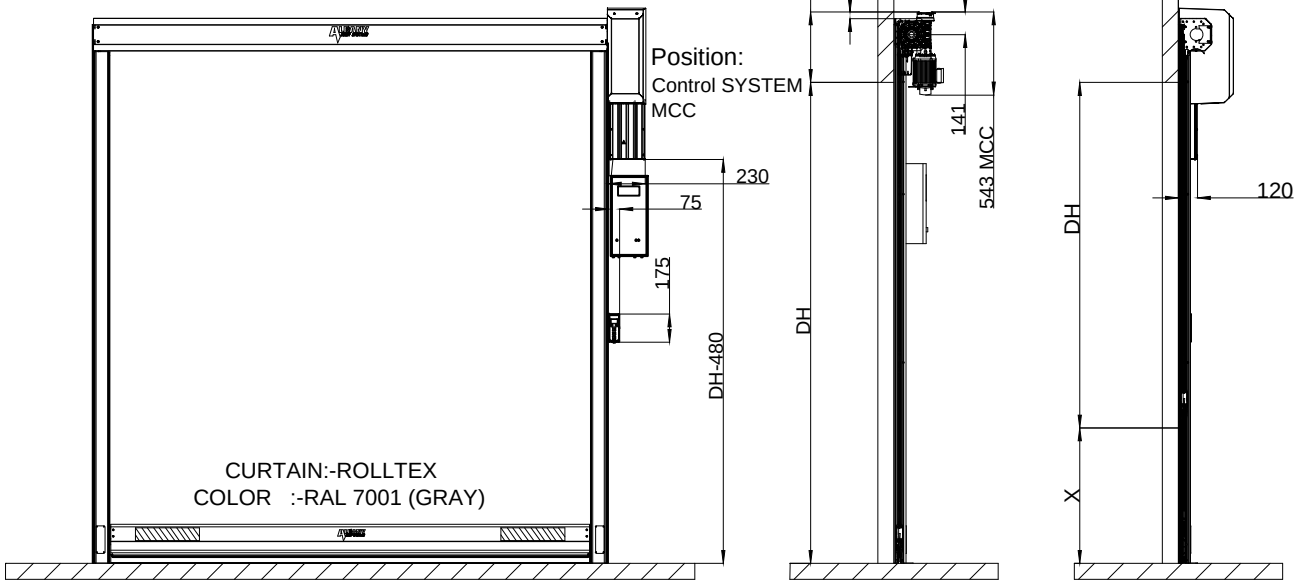


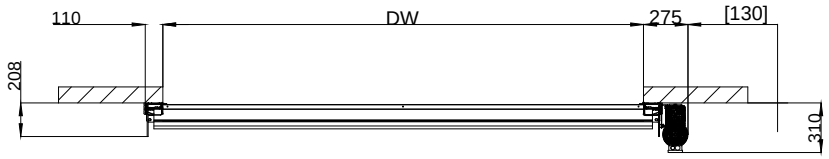

ohne Verkleidung
without cover

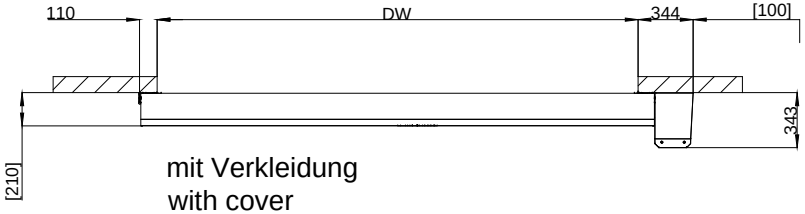

mit Verkleidung
with cover

NOTE :
1. CURTAIN : ROLLTEX.
2. COLOR : RAL 7001 (GRAY).
3. SAFETY EDGE AVAILABLE.
4. DOOR LINE (PRE RUNNING) PHOTOCELL AVAILABLE.
5. SUPPLY VOLTAGE REQUIRED : 415 VOLT, 3 PHASE (PAPL SCOPE).
6. CABLE REQUIRED : 4 CORE(PAPL SCOPE) FOR SUPPLY.
7. STD CABLE REQUIRED FOR MOTOR & PUSH BUTTON PENDENT FROM CONTROL BOX : NIHVA SCOPE.
8. STRUCTURE REQUIRED IS IN CLIENT SCOPE.
9. ALL DOOR SHOULD BE WITHOUT VISION WINDOW.
10. MOTOR POSITION - RIGHT SIDE

Tolerance ±3 mm (for all dimensions)

Dimensions in [ ] ==> clearance for installation

SR. NO.	CLEAR WIDTH(DW)	CLEAR HEIGHT(DH)	QTY
1.	1900mm	1800mm	01 NO

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE	HIGH SPEED DOOR RP300 & STRUCTURE			NIHVA TECHNOLOGIES PVT. LTD. PUNE
	NAME	SIGN	DATE	
DRAWN	P.A.		09.01.19	CLIENT :-
CHECK	P.A.		09.01.19	PROJECT :-
APPV'ED	R.D.		09.01.19	LOCATION :-

NIHVA TECHNOLOGIES PVT. LTD.
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

If any queries contact : design@nihva.com

DWG. NO. :- NIHVA/18-19/VDR/317 REV.:- R01

ALL DIMENSION ARE IN mm

SCALE: NTS WT: SHEET: 01 OF 01