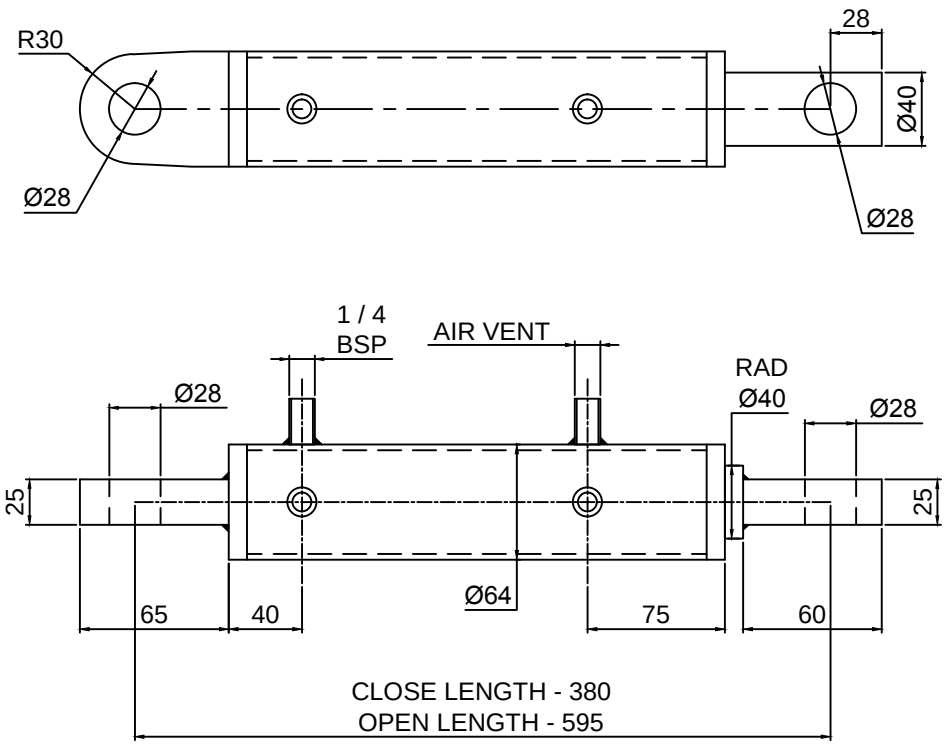


SPECIFICATION :-

- BORE :- 50mm
- STROKE :- 215 mm
- PISTON ROD :-Ø40mm
- MEDIUM :-HYDRAULIC OIL
- DESIGN :-WELDED TYPE.(SINGLE ACTING)
- END PORT CONNECTION :-1/4" BSP
- WORKING PRESSURE :- 200 BAR.
- OPERATING TEMPERATURE :-20 'C TO 100'C (DEPENDING ON SEAL)
- MAX RECIPROCATING SPEED :-12m/min
- STROKE TOLERANCE :-0 TO +1mm
- CYLINDER COATED WITH ONE COAT OF GRAY PRIMER AND ONE COAT OF PAMPAC GRAY PAINT

QTY : 3 NOS

TOLERANCE - ±1.00mm

REV NO	DATE	DRAWN	REMARK
R01	10.12.2018	P.A	1. DETAILS ADD.

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE: LIP CYLINDER

	NAME	SIGN	DATE
DRAWN	P.A		03.12.18
CHECK	P.A		03.12.18
APPRD.	R.D		03.12.18

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

CLIENT -

PROJECT -

SITE LOCATION -

If any queries contact : design@nihva.com

DWG. NO. : NIHVA/18-19/VDR/241/R01 | REV- R01

ALL DIMENSION ARE IN mm | SCALE: NTS | WT: | SHEET: 01 OF 01