

Abbreviation's:
WOW-Wall Opening Width
WOH-Wall Opening Height
FW- Frame width
FH- Frame height
FFL-Finished Floor Level

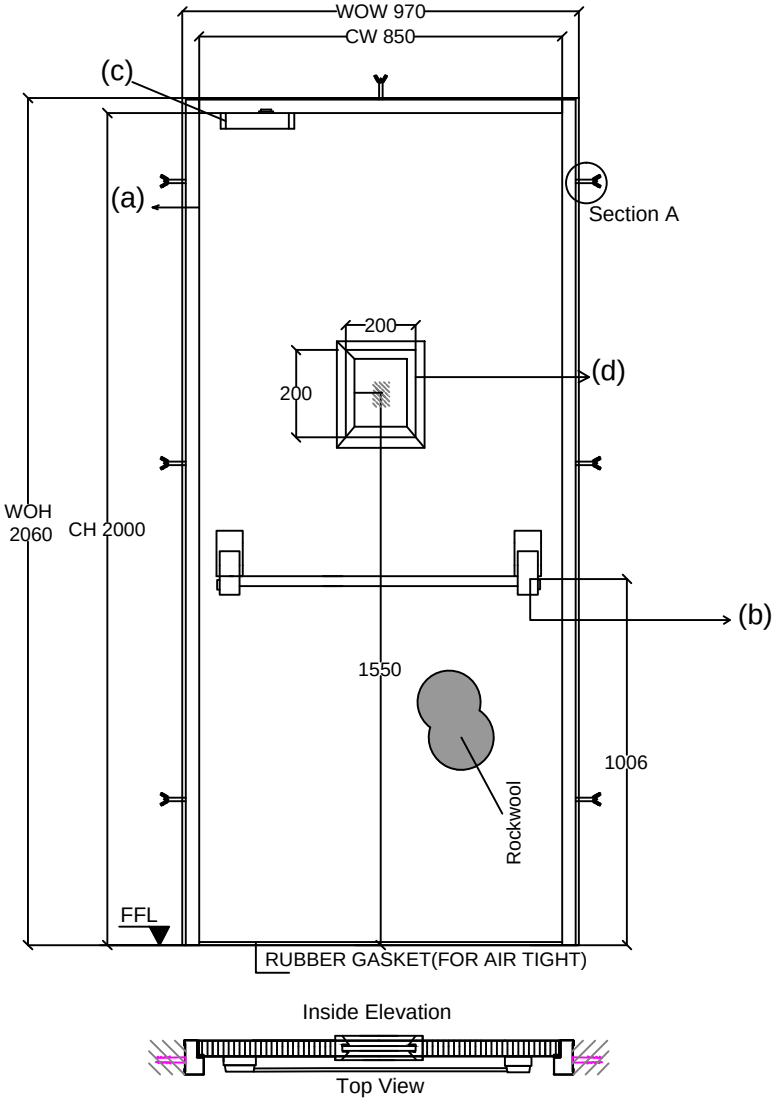

Inside Elevation

Top View

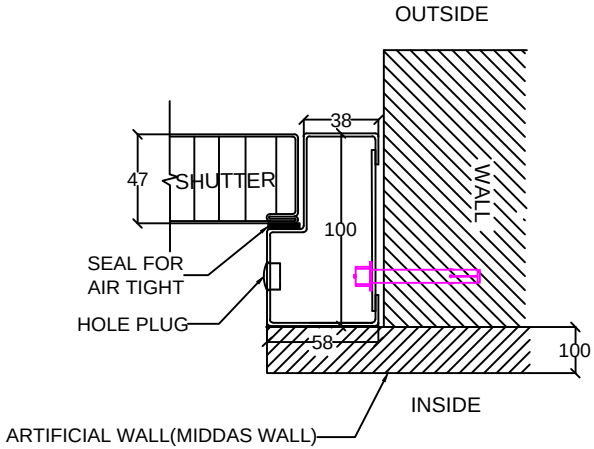

Detail view of Section A

ASSESORIES DETALES

(a) HINGES: SS Ball bearing butt hinges 100x75x3mm

(b) LOCK : Panic Bar- All doors
Mortise dead lock with half cylinder.

(c) DOOR CLOSER- All doors

(d) GLASS : 1No. of 5mm thick Clear fire Vision Glass size 200x200mm.

Shutter thickness : 47 mm
Frame Sheet thick : 1.20mm
Shutter sheet thick : 0.80mm
Rockwool thickness : 45.4mm
Fixing : On Solid Brick plastered wall with Anchors

NOTE:- *All Dimensions are in mm.
***Tolerance:-All Linear Dimensions ±3mm,Others ±0.5mm.**
***The Drawing Is For Location of Hardware only. Drawing Does Not Represent The Hardware For More Clarity, Please Go Through Hardware Broucher.**

FIRE DOOR SIZES				
WOW	WOH	CW	CH	QUANTITY
970	2060	850	2000	4

DOOR ORIENTATION- TYPE 3 (LEFT HAND REVERSE)
COLOR- ANTHRACITE GREY(RAL 7016)

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not be sold or copy to any other concern.

Fire rated Door

CLIENT APPROVAL

ALL DIMENSION ARE IN mm

	NAME	DATE	SIGN.
DRAWN	OMKAR	10/06/16	
CHECK	ANIL	10/06/16	
REV.	02		
APPRD.			
MFG			

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGY PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:-www.nihva.com

CLIENT -
PROJECT -
SITE -
DWG. NO. - NIHVA/16-17/
SCALE: 01 | WT: | SHEET: 01 OF 01
If any queries contact : projects@nihva.com