


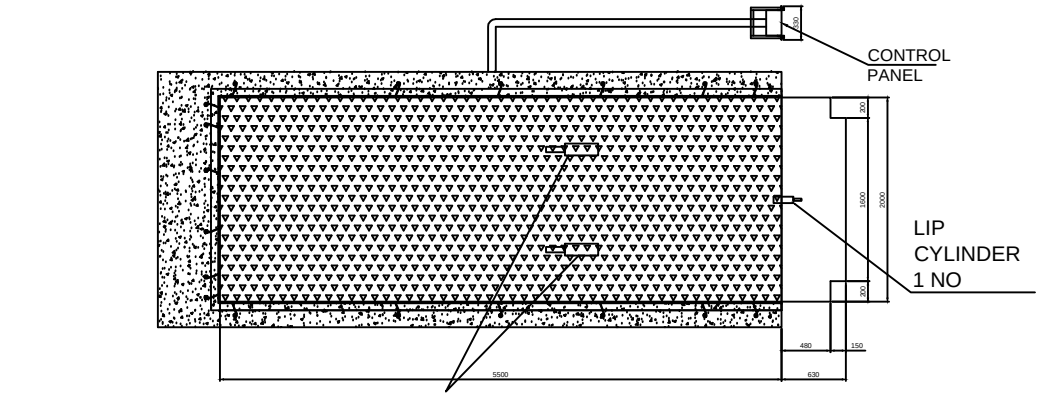


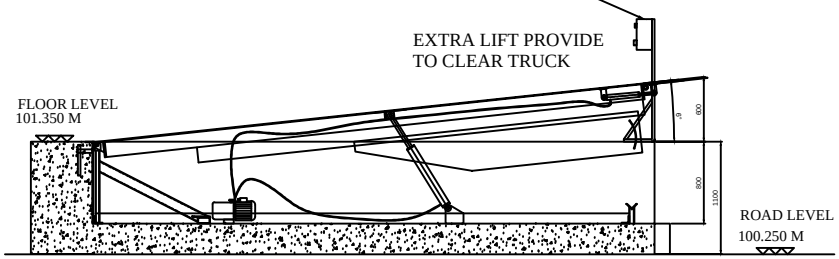



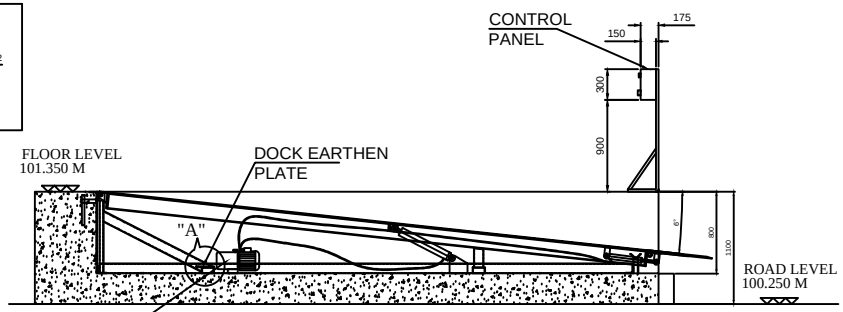

NOTE: -

1. PROPER DRAINAGE SHOULD BE DONE.
2. FABRICATION TOLERANCE FOR PLATFORM SIZE WILL BE + 10 MM.
3. PLEASE NOTE THAT THE CAPACITY OF DOCK LEVELER (6 TON) CONSIDERED IS THE CAPACITY AFTER THE LIP IS RESTED ON THE VEHICLE.
4. CYLINDERS PROVIDED ARE INDENTED TO BE USED ONLY FOR LIFTING OF BARE DOCK & CAN NOT LIFT OTHER LOADS.

DATASHEET FOR DOCK LEVELER

Sr. No	Parameter	Remark
1	Required Capacity	06 Ton
2	Leveler operation mode	AC power pack hydraulically operated
3	Lip operation mode	hydraulic
4	Operation control	by push buttons and control panel
5	Loading platform height from roadLevel	1100 mm
6	Travel above & below dock level	600 mm
7	Platform Size (W x L)	2000 mm x 5500 mm
8	Lip size (W x L)	2000 mm x 630 mm
9	Maximum slope can be achieved	6 Degree

TOLERANCE - ±5mm

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE				
GA DRAWING				NIHVA TECHNOLOGIES PVT. LTD.
	NAME	SIGN	DATE	
DRAWN	P.A		08.08.2020	CLIENT -
CHECK	G.J		08.08.2020	PROJECT -
APPRD.				SITE LOCATION -
If any queries contact : design@nihva.com				DWG. NO. : NIHVA/20-21/VDR/0025
ALL DIMENSION ARE IN mm				SCALE: NTS / WT: / REV- 0

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com