# High-Performance Door

## ASSA ABLOY RR300

ASSA ABLOY
Entrance Systems

Experience a safer
and more open world



# ASSA ABLOY RR300

- Modular system allows custom configurations
- Fast opening and closing speed saves energy costs
- Space saving construction for almost unlimited possibilities of installation
- Fast and simple installation
- Maintenance-friendly design resulting in minimal service costs
- When stainless steel version HACCP certified

## DOOR DESIGN

| Type | Design |
|---|---|
| ASSA ABLOY RR300 S | Galvanized Steel |
| ASSA ABLOY RR300 I | Stainless Steel |

## DOOR CURTAIN

The doors are available with clear PVC door curtain with coloured reinforcement stripes. Alternatively economic door curtain as Travi-top, sturdy RollTex® or NomaTex® can be delivered. Silicone-free door curtains are also possible.

## COLOURS

Basic colours of reinforcement stripes are red or blue.

A large variety of other colours on request such as orange, grey, yellow, beige, green, white.



## WINDOWS

For door curtain made from clear PVC with coloured reinforcement stripes big visible areas are available.

Options for other types of curtain vision panels or windows can be delivered.



## ACTUATORS

Individual applications can include additional safety devices. Actuators such as infrared, radar detectors, push buttons, vehicle detector loops or radio transmitters can be added to the control system. Please contact us for additional information for your specific needs.

## KNOCK-OUT CAPABILITY

For doors from width ≥ 1300 mm a knock-out capability is available. This allows non –operation times after crash and it can easy manual reset after an impact.



## SAFETY FEATURES

The door has an electrical safety contact edge. A door line photocell also prevents the door closing when objects or people are in the doorway.





ASSA ABLOY as word and logo are trademarks owned by the ASSA ABLOY Group.

## MOTOR POSITION

Gear motor with drop down safety gearbox, available left or right hand side.



## TOP ROLL

As Standard aluminium roll with galvanized shafts.

As Option aluminium roll with shafts and bearing in stainless steel or top roll and shafts made from stainless steel.

## TOP ROLL COVER

An optical upgrade and to protect the door curtain against dust, moisture and contact.

Optional

• galvanised steel • stainless steel 0° • stainless steel with 30° decline

necessary at DH <2500 mm

## MOTOR COVER

An optical upgrade and to protect the door curtain against dust, moisture and contact.

As Option

- Powder coated steel 5° decline
- Stainless steel 15° decline
- Plastic grey RAL 7040

not with coiling chain

necessary at DH <2500 mm



## ASSA ABLOY CONTROL BOX

As standard the door is equipped with a contactor control system ACS 50.

According to the operation conditions optional a frequency converter control system MCC is available. With the basic control system ACS 50 a convenient operation with high flexibility, fast start-up and easy handling of the door is allowed. The powerful MCC frequency converter control system with Vectoring of the drive unit, connected to the wide range of functions, enables the complex application of the door.

The MCC guarantees a soft start, optimal increase in speed, maximum speeds and a long service life of the door.

Figure shows MCC control system.





## BOTTOM PROFILE / FLEX EDGE

For the bottom profile aluminum or stainless steel with a soft rubber profile can be chosen.

One further option is our Flex Edge Version (flexible bottom profile without aluminum extrusion and coiled cable).



## MANUAL ACTIVIATION

The door can be operated manually with a crank in the event of a power failure. Alternatively an hand chain operator is available (not available with drive cover).

# High-Performance Door ASSA ABLOY RR300

### Applications

- As an interior door to seperate rooms and climate
- In protected outdoor areas with low wind load and moderate temperatures
- Made from stainless steel for areas where hygiene requirements must be met
- In production lines, conveyor systems or transport locks

### Advantages of the ASSA ABLOY RR300

- Modular system allows custom configurations
- Fast opening and closing speed saves energy costs
- Space saving construction for almost unlimited possibilities of installation
- Fast and simple installation
- Maintenance-friendly design resulting in minimal service costs

### Safety features

The door is designed according to the Workplace Directive of the UVV regulations and the harmonized CE Guidelines including the EN 13241-1.

### Indication of risk

The safety of the door is designed for normal use and for vehicles in an industrial environment corresponding to the harmonized CE-Guidelines. In consideration of the on site situation – especially in case of pedestrian use – additional safety measures, such as additional actuators may be required. In addition, special environmental conditions may impact the choice of door type. For more information or to schedule an on-site inspection, please contact our sales engineer.

| Door curtain | PVC with colored fabric reinforcement strips | PVC with colored fabric reinforcement strips silicone-free | RollTex® Plus RollTex® Original | NomaTex® | Top-Door curtain 1,3 mm max. 3500 × 3500 |
|---|---|---|---|---|---|
| Windows | – | – | • | • | – |
| Vision panels | – | – | – | • | • |
| Wind tabs | ✓ | ✓ | ✓ | ✓ | ✓ |
| Blue | ✓ 5002 | • 5010 | • 5002 | • A 5005* | • 5010 |
| Red | • 3002 | • 3002 | | • 3000 | • 3002 |
| Orange | • 2011 | • 2011 | • 2009 | • A 2009* | |
| Grey | • 7035 | • 7037 | • 7001[5] | • A 7038<br>• 7045[4] | • 7035 |
| Yellow | • 1021 | • 1021 | | • 1023 | |
| Green | • 6018 | | | | |
| Beige | • 1014 | | | | |
| White | • 9016 | • 9010 | | | |
| Black | | • 9005 | | | |


• Option ✓ Standard – not possible

A = Antistatic properties * = plain surface on side of top roll

1) Height < 2,500 mm, always with cover
2) Deviations possible depending on other properties
3) Depending on load alternation/minute, door size and installation location
4) Hardly flammable
5) If RollTex Original = paintable

| Technical Data | ASSA ABLOY RR300 S/I |
|---|---|
| Application | Interior door |
| Door dimensions<br>DW (min. / max.) [2]<br>DH (min. / max.) [2] | <br>1000 / 4000 mm<br>1000 / 4200 mm |
| max. area | 16,8 m² |
| Open/Close max. (m/s) [2] | 2,0 / 1,0 |
| Cycles per minute max.<br>* exact number of cycles depending on application | ACS 50 = 1<br>MCC = 3 |
| Wind resistance (EN 12424) | class 1 |
| Noise emission | < 70 dB A |
| Temperature range max.<br>(Extended on request) [3] | +10°C - +40°C<br>(0 up to +60°C) |
| **Surface / Material** | |
| Side frame | ✓ galvanised steel<br>• stainless steel |
| Bottom profile [2] | ✓ Aluminium<br>• stainless steel<br>• flexible „Flex-Edge“ |
| Bottom profile with extended flexible seal | • |
| Top roll cover [1] | • galvanised steel<br>• stainless steel 0° or 30° |
| Motor cover [1] | ✓ Plastic grey<br>• Powder coated steel<br>• stainless steel 15° |
| **Safety features** | |
| Electrical safety contact edge | ✓ |
| Power supply of the contact edge | Spiral cable |
| Door line photocell in side frame | ✓ |
| Drop down protection in drive unit | ✓ |
| Crash-System at Bottom profile [2] | • DW≥1300 mm |
| **Equipment** | |
| LED traffic light | • |
| Lintel seal | • |
| Traffic light with direction detection | ✓ MCC |
| Traffic light without direction detection | ✓ |
| Flashing alarm light | ✓ |
| **Drive unit** | |
| Gear heating | • |
| Chain drive | • (without motor cover) |
| Manual activation | Crank handle |
| **Control system** | |
| MCC Open/Close max. (m/s) [2] | • 2,0 / 1,0 |
| ACS 50 Open/Close max. (m/s) [2] | • 1,0 / 1,0<br>(max. DW3500 × DH3500 mm) |
| Separate display / control | only at MCC |
| Fuse protection by site | 10 A (C-characteristic)<br>(at 220/230V 16 A) |
| Protection | ACS50/MCC = IP55 |
| Potential-free contacts | ✓ ACS50<br>• MCC |
| **Network connection** | |
| ACS 50 | Standard: 3L/(N) PE/220/230/380/400/415V; 50Hz<br>with transformer: 3L/(N) PE/440/480/500V; 50Hz |
| MCC | Standard: 3L/(N)PE/380/400/415/ 440/460/480V;50/60Hz<br>with transformer: 3L/(N) PE/220/230/500V;50/60Hz |

# General drawing ASSA ABLOY RR300

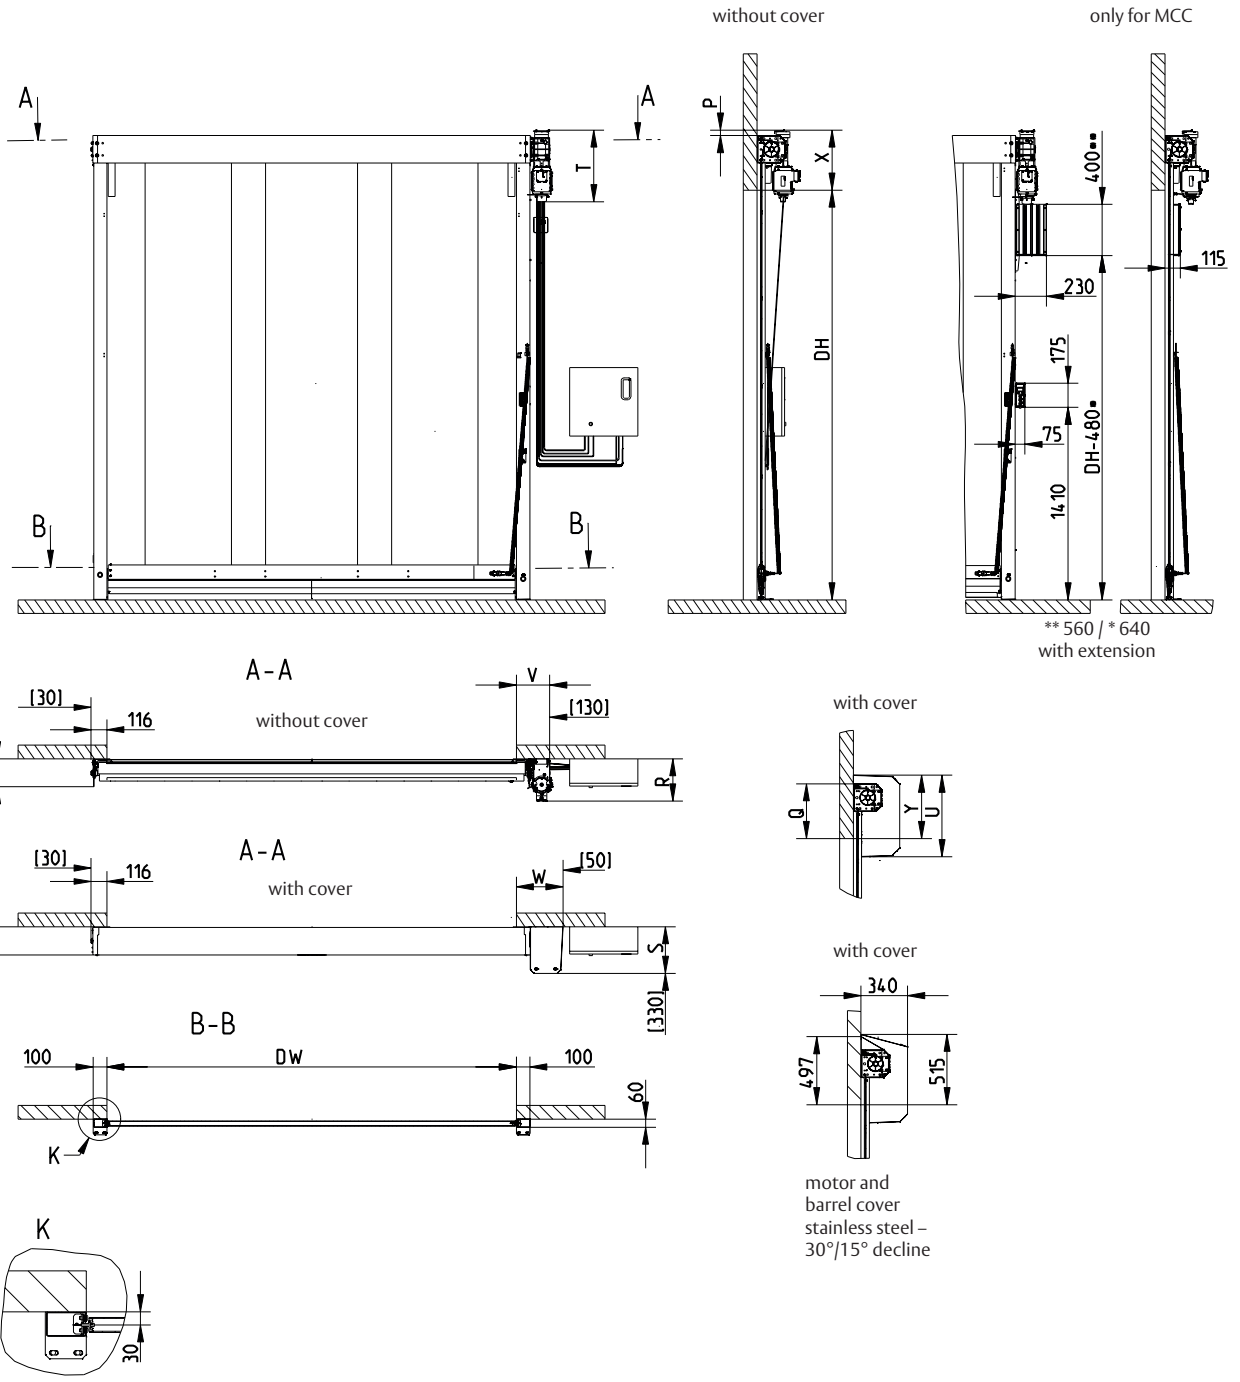


| Without motorcover | | |
|---|---|---|
| | MCC | ACS 50, without control |
| X | 440 | 440 |
| V | 265 | 265 |
| R | 315 | 315 |
| T | 550 | 520 |
| P | 42 | 42 |

| With motorcover | | | |
|---|---|---|---|
| | Plastic | Steel | Stainless steel |
| Y | 470 | 465 | 515 |
| W | 346 | 342 | 342 |
| S | 340 | 340 | 340 |
| U | 610 | 600 | 650 |
| Q | 400 | 400 | 400 |

| Available sizes | | DW | DH |
|---|---|---|---|
| **Standard** | min. | 1000 | 1000 |
| with Crash | | 1300 | 1000 |
| **Standard** | max. | 4000 | 4200 |
| with ACS 50 | | 3500 | 3500 |
| with Top 1,3 mm | | 3500 | 3500 |

[ ] = Space needed for installation

| ASSA ABLOY Control Unit | | | |
|---|---|---|---|
| | | **ACS 50** | **MCC** |
| Dimensions W × H × D | mm | 300 × 400 × 210 | 220 × 380 × 100 |


ASSA ABLOY is the global leader in access solutions. Every day, we help billions of people to experience a more open world. At ASSA ABLOY Entrance Systems, we provide solutions for efficient and safe flow of goods and people. Our offering includes a wide range of automated pedestrian, industrial and residential doors, loading dock equipment and services.

assaabloyentrance.com

ASSA ABLOY
Entrance Systems

# Fixing plan ASSA ABLOY RR300

Fixing over lintel

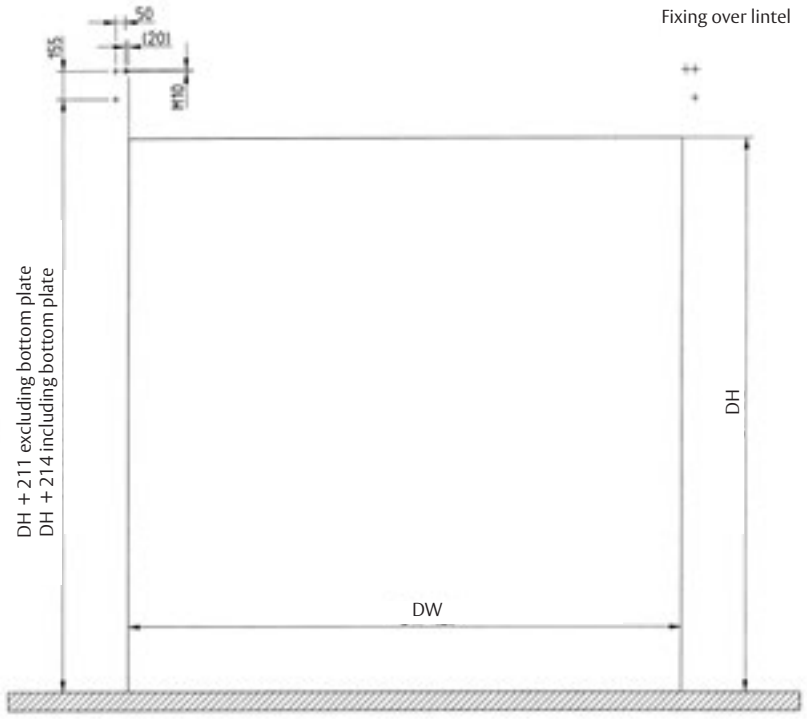


Fixing to floor




8300R00010/c

Technical data subject to change without notice

© ASSA ABLOY Entrance Systems AB PL.MAN/ASSA ABLOY RR300/de_EN-1.1/1907/64 05R 0981