
Telescopic Truck Loader/Unloader Conveyor

Technical Specifications		Acceptance/ Input
Material to be handled	Bags or Carton Boxes	
Maximum Size	600 (L) x 500 (W) x 400 (H) mm	
Maximum Weight	50 KG	
Material Handling Rate	Upto 3000 Bags or box Per Hour	
Base Section Length (Retracted)	4000 mm (13 ft)	
Extension	6000 mm (20 ft)	
Total length	10,000 mm (33 ft)	
No. of Extension Stages	3	
Basic Overall height	900 mm (3 ft)	
Belt width	600 mm	
Belt type	PVC 70 Sh.A/Smooth/Black/LF/LdB fabric/2 Ply/3.0mm/SS Fstnr Compliance: REACH Regulation EC 1907/2006 and amendments	
Belt speed	25 ~ 45 mtr/min Variable through VFD, connecting to existing TLX .	
Belt direction	Bi-Directional for loading and unloading	
Belt drive	1.5 KW geared motor (Siemens/Bonfiglioli or SEW)	
Telescopic movement drive	0.75 KW geared motor (Siemens/Bonfiglioli or SEW)	
Power supply	240 VAC, 50 Hz	
Load Capacity	50 KG/Mtr.	
Finish	RAL 5002 Ultramarine blue or per client's request Base coat of Zinc Chromate Primer 2 Coats of finish Paint	
Structure Construction	MS Heavy Duty Plates – Plate Thickness 6mm	
Conveyor Mounting	Adjustable Levelling Mounts with grouting holes	
Hydraulic Lift	Upto 2500 mm from ground level	
Standard Features and inclusions	1. Mechanical clutch to engage and disengage Telescopic action to facilitate manual operation during power outages. 2. Manual Crank provided 3. Crank detection sensor to avoid accidental movements. 4. Maintenance toolkit provided 5. Side Hand-Rail 6. Male/Female 5 Pin IP64 industrial power socket provided 7. User manual, wiring diagram and spares list provided.	

Safety & Protection Features	1. Emergency Stops on front and both sides of conveyor 2. Beacon Flash & sound alert during telescopic movement 3. Pinch Point Protection – all gaps between moving parts of 0.25 inch to 4 inches shall be covered. 4. Noise level below 85 dB 5. Work lights on front, 3W LED 12V. 6. Anti-Collision bar in Front. 7. Counter balanced for 50KG/Mtr load. 8. Safety Interlock switches for maintenance door. 9. Safety relays for panel 10. Independent safety circuit with safety PLC 11. Conveyor Belt – Fire retardant material 12. Spring loaded cable reel for wire protection 13. All control components to be 24VDC or less, including lights. 14. Motor chain guard covers 15. Work light in maintenance chamber 16. Safety labels and stickers
Design Compliance	– All conveyors shall be designed as per OSHA Conveyor Standards – 1926.555(a) General requirements. – 1926.555(a)(1) Means for stopping the motor or engine shall be provided at the operator's station. Conveyor systems shall be equipped with an audible warning signal to be sounded immediately before starting up the conveyor. – 1926.555(a)(2) If the operator's station is at a remote point, similar provisions for stopping the motor or engine shall be provided at the motor or engine location. – 1926.555(a)(3) Emergency stop switches shall be arranged so that the conveyor cannot be started again until the actuating stop switch has been reset to running or "on" position. – 1926.555(a)(5) Where a conveyor passes over work areas, aisles, or thoroughfares, suitable guards shall be provided to protect employees required to work below the conveyors. – 1926.555(a)(7) Conveyors shall be locked out or otherwise rendered inoperable and tagged out with a "Do Not Operate" tag during repairs and when operation is hazardous to employees performing maintenance work. – 1926.555(a)(8) All conveyors in use shall meet the applicable requirements for design, construction, inspection, testing, maintenance, and operation, as prescribed in the ANSI B20.1-1957, Safety Code for Conveyors, Cableways, and Related Equipment.

Optional Features	
Hydraulic Lift System	Upto 2500 mm above ground level
Castor Wheels	Heavy Duty Twin wheel castors
Man lift	Front pedestal

S. No.	Sub-Assembly / Part
1	Hose
2	Boom 1
3	Boom 2
4	Boom 3
5	Main Panel
6	Remote Panel
7	Counter Display
8	Heavy Duty Caster Wheel
9	Leveling Pads
10	Emergency Switch
11	Belt Auto Stop Sensor
12	Side Railing
13	Belt cleaning and safety brush
14	Strip Safety Brush
15	PVC Belt
16	Service Doors
17	LED Lights
18	Safety Bumper
19	Tower Lamp
20	Hydraulic Cylinder
21	Hydraulic Power Pack

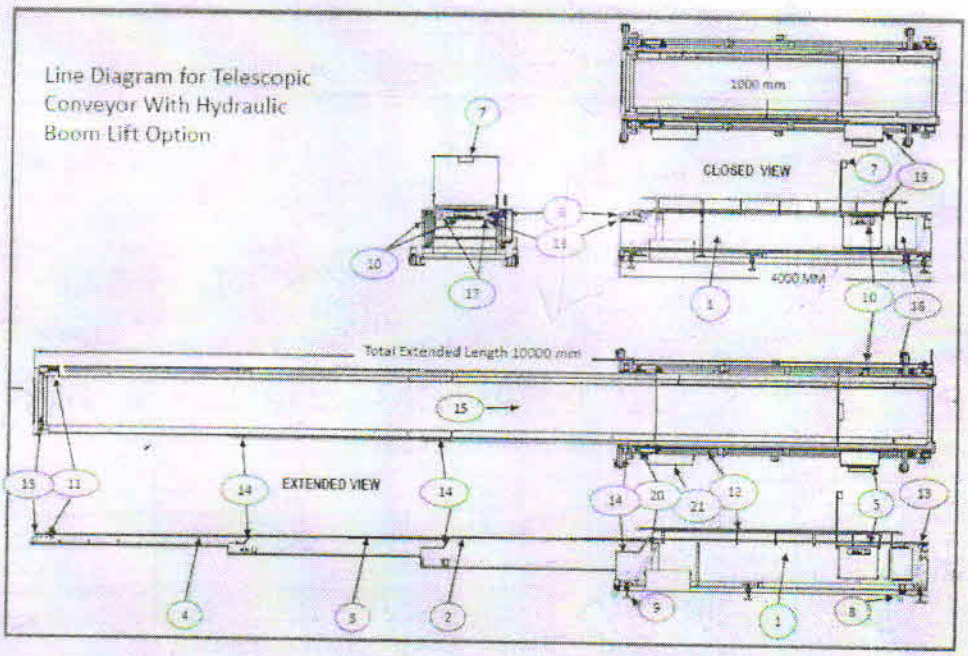

Line Diagram for Telescopic Conveyor with Hydraulic System