27. MOTORISED TELESCOPIC SLIDING GATE, BOOM BARRIERS WITH ACCESSORIES and ELECTRICAL TRIPOD TURNSTILE

Motorised Telescopic Gate with Four Sliding Leaf on One Side. Gate made of mild steel with one coat of grey epoxy primer by spray. European Electromechanical actuator; three station push button, pair of photcells with anodized aluminum vertical mountine, flashing light.
Italian Make Boom Barrier : LED Lighting system with variable flashing. Three station push button. Fixed support , pair of photocells with anodized aluminum vertical mountings.

Gate Design

Pattern Standard Mild Steel hollow tubular section, torsion free fully welded unit

Gate Frame	125mm * 100mm * 3.0mm M.S. pipe horizontal & vertical profile
Infills	100mm * 100mm * 3.0mm M.S. pipe vertical profile
	25mm * 25mm * 2.5mm M.S. pipe vertical profile and the distance between inner vertical is approx 98mm

The infills are to be fully welded between the upper and lower gate frame

Cladding	Not applicable
Bottom Rail	C channel & 20mm round polished bar
Bottom Rollers	Italian make Galvanised Wheels 120mm dia. with ball bearings and axle with lubrication point

Guide Post

Full height Column steel	Galvanised adjustable upper guide brackets with guide post constructed from a
	square hollow section of 100 x 100 x 3mm profile
Guide Rollers	Nylon Rollers mounted on both side of column providing lateral support & smooth movement of the gate leaf
Safety post	Safety strike with M.S. Post made of 125 x 75 x 3mm profile section on both ends
Surface Finish	Standard one coat of grey epoxy primer by spray

European Electromechanical actuator

Drive unit	Rack driven rugged and powerful drive unit with integral electronic control unit
Travel control system	Control unit with limit switches to sense open & close positions
Capacity	3000 kg
Duty Class	Intensive use
Working cycle	70%
Power Supply Vac (Vdc)	230 (24)
Absorption	1.1 A
Torque max.	90 Nm
Opening / Closing Speed	0.13 m/s

Release system for manual opening	Key operated
Product dimensions	340 x 256 x 360 mm

Rack Imported galvanized rack, duly hardened and tempered Control Switch Three Station Push Button Safety devices Pair of Photocells with anodised aluminium vertical mountings Flashing light


Salient Features:

- CE marked according to the European Machinery Directive 2006/42/CE and type tested according to standard
European Norm 13241-1

- Manual operation in case of power failure.
- Highly compact dimensions & extremely silent operation.
- Motor protected by internal thermal switch.
- Advance electronic control unit permits/allows operation time adjustment, partial opening, automatic closing,
step by step control, stop safety, reverse safety.
- MPS startup at maximum power permits motor to overcome any initial friction caused by ice, dust, etc.

Boom Barrier:


European Boom Barrier comprising of;
- CE European Certification.
- White spray painted aluminium boom with end caps & passive rubber safety edges and fixed support.
- LED Lighting system with variable flashing that illuminates it in whatever position it finds itself.
- Robust spring balanced gear system
- Encoder controlled movement.
- External manual release system with key operation.
- Pair of Photocells with anodised aluminium vertical mountings.
- Three station push button

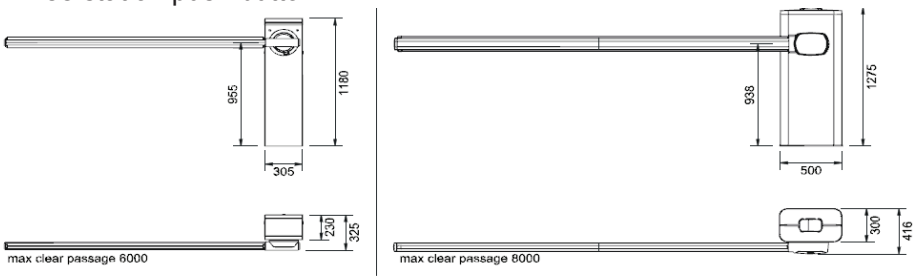

Above all dimensions are in mm

Technical Features:

Opening Time	7 s/90°
Overall Dimensions	230 x 305 x 1180 mm
Mains Power Supply	230 Vac
Motor power supply	24 Vdc
Nominal electrical input	1.5 A
Motor Nominal electrical input	4.5 A
Power input	350 W
Max Power yield of motor	300 W
Integrated lights	Yes
Max Torque	750 Nm
Working Cycle	70%
Protection Rating	IP 54
Operating Temperature	-20°C/+55°C
Travel Control system	encoder

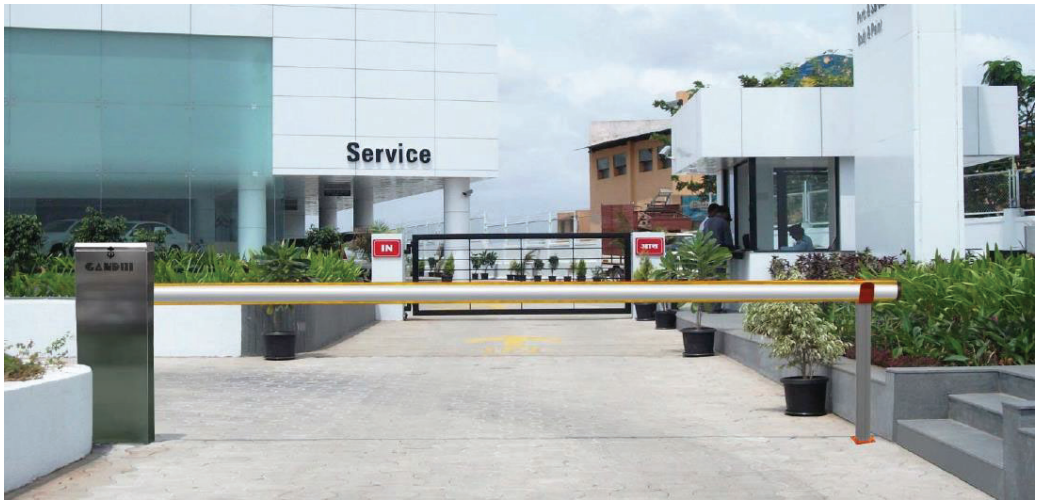

Note: Size of boom Barriers and Gate will depend on actual site requirements and drawings issued.

ELECTRICAL TRIPOD TURNSTILE

Supply Installation testing and commissioning of WAIST High ELECTRICAL TRIPOD TURNSTILE With Electromagnetic Lock And Microprocessor Based Control Panel. SS Body With Brush Polish, SS Hub & SS Arms. HEAVY DUTY- ROBUST MODEL with Bi-Directional: Upon activation allows passage in required direction and gets locked in the opposite direction

Technical Compliance

Sr.No.	Description	Specifications
1	Size	(L x B x H) 480 x 280 x 980 mm
2	Shape	SemiAutomatic Tripod with D Shape Tripod with 3 arms.
3	Unlock Time	0.2 Sec,
4	Pass Rate	35 Person / Min
5	Pass Width	550 mm
6	Weight	45 Kgs
7	Mode	Fail Safe
8	Power Consumption	30 W
9	Driving voltage	24 V



MOTORISED TELESCOPIC SLIDING GATE, BOOM BARRIERS WITH ACCESSORIES And ELECTRICAL TRIPOD TURNSTILE ; all items include all arrangements from supply, installation, testing and commissioning till handover. All necessary civil work, or electro mechanical, IT work for the same shall be responsibility of the vendor / installer. The AMC of all these products after the completion of warranty period shall be 2 years.

END OF SECTION