High-Performance Door
Albany RR300 Plus

ASSA ABLOY

ASSA ABLOY Entrance Systems

The global leader in
door opening solutions





AESTHETICS

Space saving design enables installation into door openings with restricted space.

COUNTERBALANCE

The door comes standard with a counterbalance. This enables manual activation.

KNOCK-OUT CAPABILITY

In the event of a collision the bottom profile breaks away, causing a sensor to stop the door. The door can then be easily reset by hand.

ASSA ABLOY, Besam, Crawford, Albany and Megadoor, as words and logos, are examples of trademarks owned by ASSA ABLOY Entrance Systems or companies within the ASSA ABLOY Group.

High-Performance Door Albany RR300 Plus

Advantages of the door

- Space saving design enables installation into door openings with restricted space.
- Door curtain is constructed with transparent PVC and reinforcement stripes. Chemical and puncture resistant RollTex® fabric is available for more demanding applications (optional).
- Integrated balancing systems allows for self opening.
- The door curtain is equipped with special wind tabs that travel in the side frame guides and give the door significant wind resistance.

VERSION ALBANY RR300 PLUS F+R

The Albany RR300 Plus can be amanded to a high performance door for escape and rescue routes to a max of 4000 x 4000 mm by adding special equippment.
Monitoring devices such as a radar motion control, automatic self opening and a regular test run are features for this door type. (Temperature range +10°C – +30°C).

VERSION ALBANY RR300 PLUS ALU SEALED

Amongst others the curtain guidance in the side-frame is reduced in order to achieve an optimum of sealing and a minimum loss of pressure. It is suitable for the application in cleanrooms. The door can be installed inside or outside the positive pressure region. The door can be applied up to ISO class 7. The model Albany RR300 Plus Alu Sealed is not suitable as emergency exit.

Design

DOOR MATERIAL

The door (side frame, top roll cover and bottom profile) is made from aluminium or stainless steel.

DOOR CURTAIN

The door comes standard with a transparent PVC curtain with blue reinforcement stripes.
In situations, for example, where more leakage protection is necessary, durable curtains made of RollTex or Normatex are available. Silicone-free curtains are also available.

WINDOWS

The curtains are available with or without windows as well as reinforcement stripes.

DRIVE UNIT

The door is equipped with a gear motor, available on the left or right hand side.

CONTROL SYSTEM

The door comes standard with a relay control system MCS-R. Depending on the operational conditions, a contactor control system ACS 50 or a frequency converter control system MCS-FS and MCC are available. The powerful MCC frequency converter control system with Torque Vectoring of the drive unit, connected to the wide range of functions, enables nearly an unlimited use of the door. The MCC guarantees a soft start, optimal increase in speed, maximum speeds and a long service life of the door.

ACTUATORS

Specific application may require additional safety devices. Actuators, such as infrared, radar detectors, push buttons, vehicle detector loops or radio transmitters can be added to the control system. Please contact us for more information regarding your specific needs.

MOTOR COVER AND TOP ROLL COVER

A motor cover or top roll cover are optional door features. (Exceptions include sealed and and F+R versions.)

INTEGRATED CABLE CHAIN

The door comes standard with an internal cable routing to the bottom profil.

OPENING THE DOOR

Manual activation: the door can be opened by manually releasing the brake on the balancing system.
As an option the door can be equipped with a hand lever on both sides and/or with a automatic activaton. The door opens automatically in the event of a power outage.
In both cases the springs of the balancing system are released and the door opens to a maximum height of max. 2.0 m (depending on the size).

BOTTOM PROFILE / FLEX EDGE

The door comes standard with an aluminum bottom edge. An additional option is our bottom edge made of stainless steel is available. One further option is our Flex Edge Version (flexible bottom profile without aluminum extrusion and coiled cable).

Technical Data Albany RR300 Plus

TECHNICAL DATA	Albany RR300 Plus	Albany RR300 Plus sealed	Albany RR300 Plus F+R
Application	Interior door	Interior door	Interior door
Door dimensions (mm) DW (min. / max.) LB DH (min. / max.) LH	 1000 / 5000 mm 1000 / 5000 mm	 1000 / 3000 mm 1000 / 3000 mm	 1000 / 4000 mm 2300 / 4000 mm
max. area	25 m²	9 m²	16 m²
Open/Close max. (m/s) [2]	2,2 / 0,9	2,1 / 0,8	2,2 / 0,9
Wind resistance (EN 12424)	class 1 (Exception „Flex-Edge“)	class 0 max. leckage. 70 Pa	class 1 class 0 DH > 3500 mm
Leckage (EN 12426)	-	65m³/h at 25 Pa at DW1500×DH2000	-
Space requirement top / side frame	400–515 / 123 und 123	400–515 / 123 und 123	400–515 / 123 und 123
Temperature range max. [3]	+10°C – +40°C	+10°C – +40°C	+10°C – +30°C
Surface material			
Side frame	✓ Anodized aluminum • Stainless steel • Powder coated	✓ Anodized aluminum	✓ Anodized aluminum • Stainless steel • Powder coated
Top roll cover [1]	• Anodized aluminum 0° • Powder coated steel • Stainless steel 0°/ 30°	✓ Anodized aluminum	✓ Anodized aluminum 0° • Powder coated steel • Stainless steel 0°/ 30°
Motor cover [1][2]	✓ Plastic Grau • Powder coated steel • Stainless steel 15°	✓ Plastic Grau • Powder coated steel	✓ Plastic Grau • Powder coated steel • Stainless steel 15°
Bottom profile [2]	✓ Aluminium • Stainless steel • „Flex-Edge“ (max. 4×4,2m)	✓ Anodized aluminum	✓ Aluminium • Stainless steel
Bottom profile with extended flexible seal	•	-	•
Safety features			
Electrical safety contact edge	✓	✓	✓
Power connetion with drive unit	inside (at „Flex-Edge“ per radio)		
Door line photocell in side frame	✓	✓	✓
light curtain (integrated) [2]	• inside side frame	–	• inside side frame
Crash-System at curtain/bottom profile [2]	• Spiral cable or radio	–	• Spiral cable or radio
Curtain tension [2]	• Tension spring	–	• Tension spring
Emergency egress [2]	• Crank handle • Chain drive	✓ Crank handle • Chain drive	–
Self opening in event of power outage	•	–	✓
Counterbalance	Spring force	Spring force	Spring force
Suitable for emergency exit	no	no	yes
Brake type (Opperation current- / fail-safe brake)	✓ Fail-safe • Opperation current	✓ Fail-safe	✓ Opperation current
Equipment [4]			
Lintel seal	–	✓	–
Radar detector	•	•	✓
Drive unit			
Motor power	• MCS-R = GfA 0,65 kW; ✓ MCC/ACS50/MCS-FC = GfA 0,75 kW	GfA 0,75 KW	GfA 0,75 KW
Chain drive (space saving) [2]	–	–	–
Gear heating	•	•	✓ • DH > 2600mm
Chain drive	•	•	–
Control system			
MCC: Open/Close max. (m/s) [2]	• 2,2 / 0,9	✓ 2,1 / 0,8	✓ 2,2 / 0,9 Special Programm
MCS-FC: Open/Close max. (m/s) [2]	• 1,7 / 0,8	–	–
MCS-R: Open/Close max. (m/s) [2] (max. DW4000 × DH4200mm)	✓ 1,2 / 1,2 („Flex-Edge“ 3500×3500mm)	–	–
ACS 50: Open/Close max. (m/s) [2] (max. DW4000 × DH4200mm)	✓ 1,2 / 1,2	–	–
Separate display / control	only at MCC	✓	✓
Fuse protection by site	10 A (B-characteristic) (at 220/230V 16 A)		
Control voltage	24 V DC	24 V DC	24 V DC
Protection	MCS = IP54 ACS50/MCC = IP55	MCC = IP55	MCC = IP55
Network connection			
MCC	Standard: With transformer:	3L/(N)/PE/380/400/415/440/480V;50/60Hz 1L/(N)/PE: 220/230V 50-60Hz (25% red. speed/ only at F+R)	
MCS-FC		1L/(N)/PE/230; 50/60Hz	
MCS-R		3/(N)/PE 400V; 50-60Hz	
ACS 50	Standard: With transformer:	3L/(N)/PE/230/380/400/415; 50/60Hz 3L/(N)/PE/440/480/500V;50/60Hz	

• Option ✓ Standard – not possible



ASSA ABLOY control systems
With the basic control systems MCS-R and MCS-FS convenient operation with high flexibility, fast start-up and easy handling of the door is allowed.



Opening the door
The manual release handle enables the door to be opened easily.As an option, the door can be equipped with automatic activitaion.



Knock-out capability (Crash-System)
The door can be equipped with a knock-out capability option.

1) DH < 2 500 mm always with cover
2) Deviations possible depending on other properties
3) Depending on cycles/minute, door size and installation location. Extended temperature range on request.
4) Activator and traffic light see separate brochure



Example of use

Applications of the Albany RR300 Plus
- As an interior door for climate control
- For climate control and energy conservation
- In protected exterior applications
- In applications with strict hygiene requirements, the PVC curtain is easy to clean
- In distribution and warehouse applications

Safety features
The door has an electrical safety contact edge. A standard in-line photocell prevents the door from closing when an object is in the doorway. An optional integrated light curtain is available for doors with a minimum height of 1975 mm.
The door is designed according to the Workplace Directive of the UVV regulations and the harmonized CE Guidelines including the EN 13241-1.

Indication of risk
The safety of the door is designed for normal use and for vehicles in an industrial eenvironment in accordance to the harmonized CE-Guidelines. In consideration of the on site situation – especially in case of pedestrian use – additional safety measures, such as additional actuators may be required. In addition, special environmental conditions may impact the choice of door type. For more information or to schedule an on-site inspection, please contact your local sales engineer.

Door curtain (Color code according to RAL color card)	PVC with colored fabric reinforcement strips	PVC with colored fabric reinforcement strips silicone-free	RollTex® Plus RollTex® Original	NomaTex®	Top-Door curtain 1,3 mm (max. 3500 × 3500mm)
Windows	–	–	•	•	–
Vision panels	–	–	–	•	•
Wind tabs	✓	✓	✓	✓	✓
Blue	✓ 5002	✓ 5010	• 5002	• H 5005	• 5010
Red	✓ 3002	✓ 3002	-	• NA 3000	• 3002
Orange	• 2011	• 2011	• 2009	• H 2009	
Grey	• 7035	• 7037	• 7001	• 7038	• 7035
Yellow	• 1021	• 1021		• NA 1023	
Green	• 6018				
Beige	• 1014				
White	• 9016	• 9010			
Black		• 9005			

H = Smooth side on the front NA = not antistatic





Albany RR300 Plus Stainless steel F+R as an escape route




Albany RR300 Plus Alu Sealed for sealing

General drawing Albany RR300 Plus

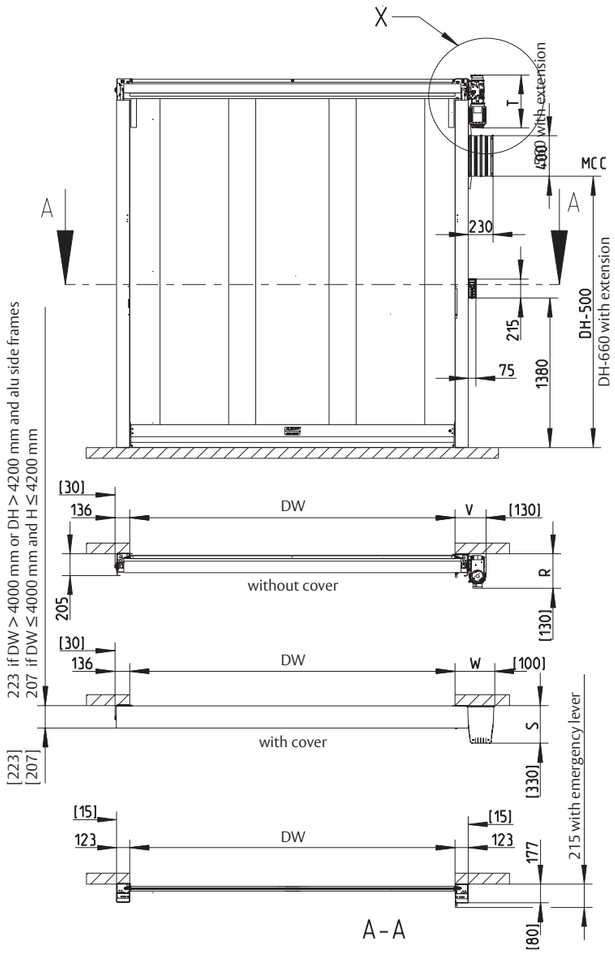




without cover




motor cover



motor and top roll cover
stainless steel - 30°/15°

only for MCS-FC



Available sizes			
		DW (B)	DH (H)
	min. (mm)*	1000	1000
	max. (mm)**	5000	5000
* Crash	min. (mm)	1300	1000
** with Top 1,3	max. (mm)	3500	3500
** with Option sealed	max. (mm)	3000	3000
** with ASSA ABLOY ACS 50 or ASSA ABLOY MCS-R	max. (mm)	4000	4200
** with Flex Edge	max. (mm)	4000	4200
** with Flex Edge and ASSA ABLOY MCS-R	max. (mm)	3500	3500

Without motorcover		
	ASSA ABLOY ACS 50 / ASSA ABLOY MCC / without control system / ASSA ABLOY MCS-FC	ASSA ABLOY MCS-R
X	443	400
V	285	245
R	315, if DW ≤ 4000 and DH ≤ 4200	240
R	325, if DW > 4000 or DH > 4200 and Aluminium side frames	240
T	500	415
P	45	0


With motorcover			
	Plastic	Steel	Stainless steel
Y	470	465	515
W	366	362	362
S	340	340	340
U	610	600	650
Q	400	400	497 (30°), 400 (0°)


Control Unit					
		ASSA ABLOY ACS 50	ASSA ABLOY MCC	ASSA ABLOY MCS-FC	ASSA ABLOY MCS-R
Dimensions W × H × D	mm	300 × 400 × 210	220 × 380 × 100	215 × 345 × 140	215 × 345 × 140
Dimensions frequency converter W × H × D	mm			106 × 355 × 106	

[ ] = Space needed for installation

8300R0020/o

Fixing plan Albany RR300 Plus

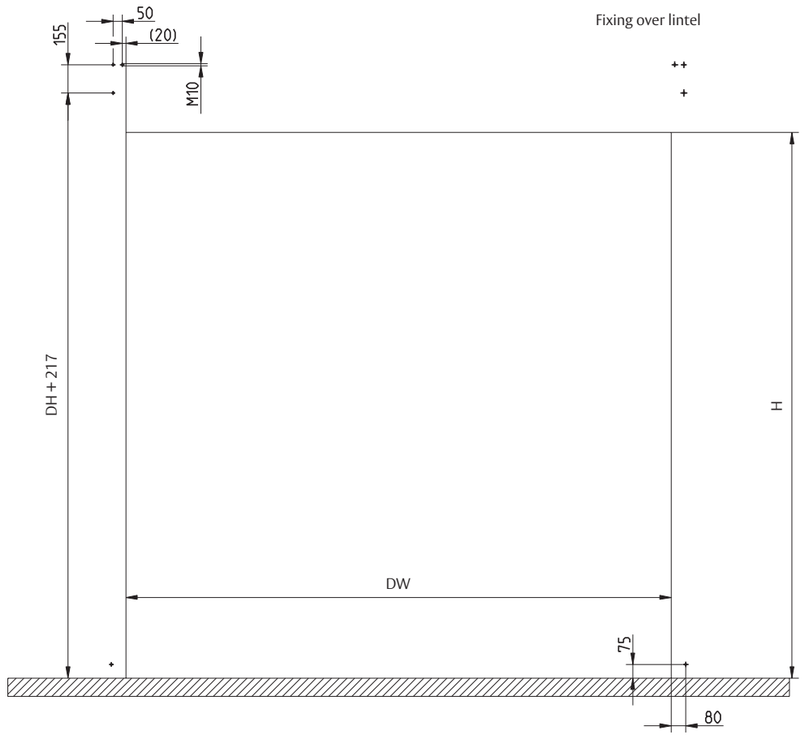

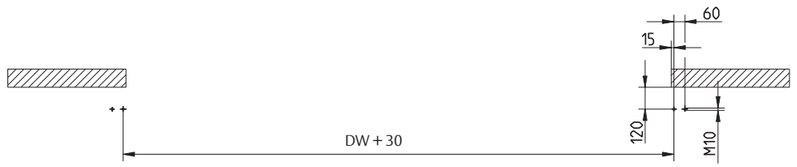

ASSA ABLOY Entrance Systems is a leading supplier of entrance automation solutions for efficient flow of goods and people. With our globally recognized product brands Besam, Crawford, Albany and Megadoor, we offer products and services dedicated to satisfying end-user needs for safe, secure, convenient and sustainable operations.
ASSA ABLOY Entrance Systems is a division within ASSA ABLOY.

assaabloyentrance.com



ASSA ABLOY Entrance Systems

info.aaes@assaabloy.com
assaabloyentrance.com

Follow us:

Please enter *ASSA ABLOY Entrance* in the channel's search field.

© ASSA ABLOY Entrance Systems AB PL.MAN/Albany RR300 Plus/DEU.EN-1.1/1703 / 64 100 740 Technical data subject to change without notice