Ball diameter Albany RapidRoll® F

Profile	N 100		N 120		N 140	
Profile height approx. 100 mm Illustration not to scale						
Materials	AL	Steel	AL	Steel	AL	Steel
Bars per/m door height	10,5	10,5	10,5	10,5	9	9
Material strenght mm	1,2	1,0	1,2	1,0	1,2	1,0
Section thickness mm	21	21	18	18	30	30
Weight / m	1,15	2,6	0,6	1,3	0,7	1,6
Weight / m^2	12	26,1	6,3	13,3	6,3	14,5
Door width approx.	8	10	5	5	10	10
Light sections						
Profile	**N 100 / L**		**N 120 / L**		**N 140 / L**	
						
Windows per / m	7		7		7	
Windos size	100 x 54		100 x 54		100 x 54	

Ball diameter									
Door height in mm	Axle tube mm			Axle tube mm			Axle tube mm		
	159	193	219	133	159	219	159	193	219
2000	360	370	400	210	220	290	360	370	380
2500	420	410	400	260	280	310	360	380	400
3000	420	420	450	280	300	330	400	400	410
3500	460	450	450	300	320	350	400	420	450
4000	460	470	500	320	340	360	410	430	460
4500	480	490	500	350	370	380	430	440	470
5000	520	520	530	360	380	390	460	480	500
5500	520	530	560	370	390	400	490	500	510
6000	540	550	560	390	400	410	490	500	520

ASSA ABLOY Entrance Systems is a leading supplier of entrance automation solutions for efficient flow of goods and people. With our worldwide presence we offer products and services dedicated to satisfying end-user needs for safe, secure, convenient and sustainable operations. ASSA ABLOY Entrance Systems is a division within ASSA ABLOY.

www.assaabloyentrance.com

ALBANY
ASSA ABLOY

ASSA ABLOY Entrance Systems
Albany Door Systems

www.albanydoors.com

ASSA ABLOY

The global leader in door opening solutions

NIHVA
NIHVA Technologies Pvt. Ltd.

64 05 R 0909[1]307 EN Technical data subject to change without notice © ASSA ABLOY Entrance Systems AB. All rights reserved.

Albany RapidRoll® F

Metal Roll Door - The Roll Door were safety is important

ALBANY
ASSA ABLOY

Technical data sheet

ASSA ABLOY, the global leader in door opening solutions



NIHVA

Metal-Roll Door Albany RapidRoll® F

PRODUCT DESCRIPTION
The double-walled, insulated profiles are filled with Styropor. The upper surface is sheet smooth and weather-proof. The individual profiles are secured against sideways movement by means of plastic end pieces, and roll up on to a steel shaft. This corresponds to the permitted bend of max. T 1/500. Axle-bearing is on lateral consoles. Lateral guide rails are made of galvanized steel. The depth of the guide rails corresponds to VOB 18535. The bottom profile is fitted with a hollow-chamber rubber section that seal against the floor.

APPLICATION
The Albany RapidRoll® F metal roll door is door for industrial distribution and warehouse applications.

DESIGN
The RapidRoll® F offers profiles made of galvanised steel, untreated aluminium, or anodised aluminium and single-walled or double-walled insulated anodised aluminuim. Profiles are equipped with plastic end pieces and the bottom profile is fitted with a hollow-chamber rubber section that seal against the floor. Axle-bearing on lateral, galvanised brackets. Top roll made of steel, lateral guide rails made of of galvanised steel.

ROLL BRACKETS
Insulated doors with a width of 3000 mm to 7000 mm maximum have fitted roll brackets. The rolling system ensures that the door curtain moves freely from the top roll into the guide rails. The shaft then moves towards the guide rail entry as the roller diameter gets smaller. The rolling systems stable construction uses high-quality mechanical engineering bearings.

DRIVE UNIT
The RapidRoll® F can be configured as a manual door or with an electric drive. The electric drive versions offer various control options. The chain drive offers self-restraining worm gear and reversing contact or control limit switches. Operational and safety limit switches 1:10.

CONTROL SYSTEM
Controls, transmitter and safety fittings are important parts of our doors. As a standard, all doors with driven control systems have hold/run controls and triple push-buttons. As a requirement, the operator must have a clear view of the door from the control box. The door movement is immediately interrupted when the push-button is no longer activated.

MANUAL ACTIVATION
If case of a power failure, the door can be manually opened with a crank.


SAFETY FEATURES
The door is designed in accordance to Workplace Directives of the UVV, CE Guidelines including the EN 13241-1 and § 3 of the Technical Work Equipment Act (Machine Protection Act), fitting sprocket wheel drives with sprocket guard devices. All power-operated roll doors receive a TÜV (German Technical Monitoring Association) certified roll-down check (catching device). This roll down check verifies that, during a failure the door automatically catches the door curtain or drive axle and brings the door to a safe stop.

INDICATON OF RISK
The security of the door is designed for normal use for vehicles in industrial environment corresponding to the harmonized CE-Guidelines. In consideration of the situation on site – especially in case of use by pedestrians – additional safety measures, like additional actuators may be required. In addition, special environmental conditions may have impact on the right choice of doortype. In case of any doubt, please contact our sales engineer to receive consulting on site.

TECHNICAL DATA


Exterior door	suitable
Door dimension	For details please note general drawing
DW max.	12000 mm
DH max.	8000 mm
Special sizes	on request
Door construction	galvanised steel, natural Al, anodised Al or plastic-coated
Opening direction	vertical
Section	type 100 x 1.00/1.25 mm internally; 100 D insulated
Drive unit	electrical
Speed (m/s)	
Open/close up to	0,13 m/s
Fuse protection	16 A träge
Control voltage	24 Volt
Protection degree	IP 54
Motor performance	dependent on door size
Power Supply	3/N/PE 400V, 50 Hz
Connection	5 x 1.5 mm²

General Drawing Albany RapidRoll® F

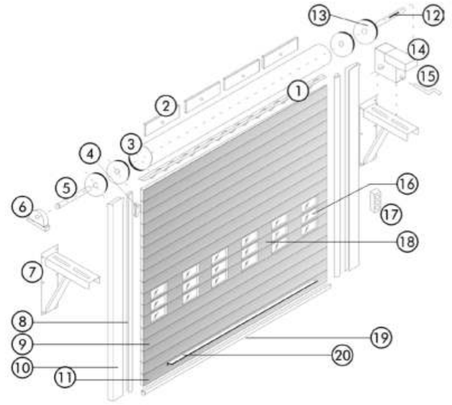

1) Sealing brush
2) Suspension plate
3) Tube
4) Glide shoe
5) Journal
6) Pillow block bearing
7) Bracket
8) Edge protection section
9) Plate
10) Slide rail
11) End rail
12) Journal
13) Circular blank
14) Attachment drive
15) Emergency crank
16) Window
17) Control unit
18) Window plate
19) Hollow chamber rubber
20) Reinforcement bracket


MINIMUM SPACE REQUIREMENT FOR ROLL DOORS WITH SPROCKET WHEEL DRIVE
(for doors with daylight height up to 4000 mm)

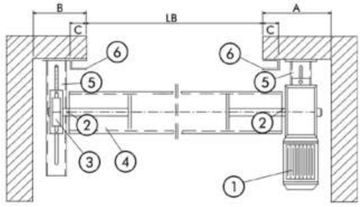

1) Drive unit
2) Shaft bolt
3) Pillow block bearing
4) Top roll
5) Brackets
6) Slide rail


DW	A	B	C
– 4000	250	180	80
4000 – 5500	300	200	80
5500 – 6500	450	220	100

MINIMUM SPACE REQUIREMENT IN FALL AREA
(for doors with daylight height up to 4000 mm)

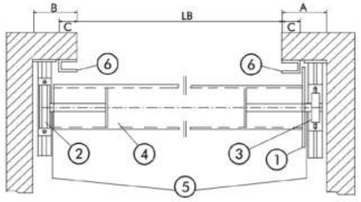


1) Sprocket wheel
2) Catch device
3) Pillow block bearing
4) Top roll
5) Brackets
6) Slide rail

DW	A	B	C
– 4000	150	150	80
4000 – 5500	200	180	80
5500 – 6500	220	180	100



MINIMUM SPACE REQUIREMENT IN LINTEL
The required lintel height is calculated by (3) entry -250 mm + (2) ball diameter (see table) +20 mm (1) ceiling distance. If space is limited the entry may be reduced. However, the reduced entry size will affect the technically-determined passage size of the middle plate. Reducing the size of the slide rail can counteract this undesired side-effect.

General Drawing Albany RapidRoll® F

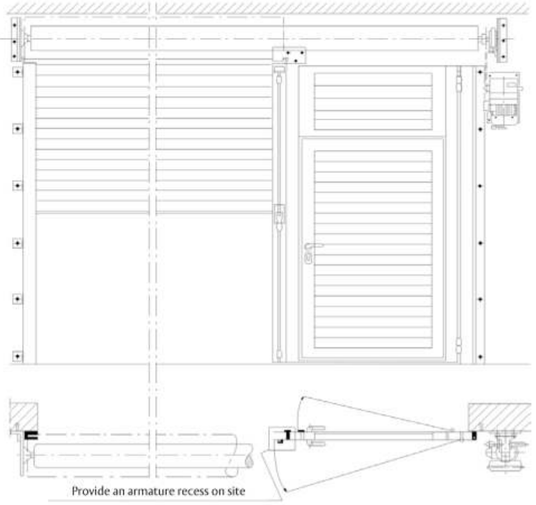

SIDE DOOR / SLIP DOOR
Roll doors can be equipped with solid or folding lateral walk leaf doors. These special doors are needed when the roll door provides the only access to the space, as an escape route, or where there is regular pedestrian traffic. The lateral walk leaf door side section is optically matched to the roll door plate, and can swivel to the side when the roll door is open. The entire door opening is then usable without restriction. When the side door is open, a safety control switch breaks the control current to the drive.

STANDARD CONSTRUCTION
Side section swings open inwards, sliding doors swing outwards.

SPECIAL CONSTRUCTION
Side section and sliding doors swing inwards.

CONSTRUCTION
The frames of the side section and the sliding doors are made of galvanised RP tubes, in a stiff, anti-distortion construction. The side part is closed with a drive bolt, and the door has a profile cylinder lock, lockable from either side with light metal push handle set (delivery without profile cylinder). Door filling consists of roll door sections. All weld seams on the frame sections are ground flush.

PAINTING
Frame parts are galvanised with cover lacquering in standard hue RAL 7031 blue grey.

NIHVA