enterö
entrance automation



SMART & SECURE ENTRANCE SOLUTIONS

Su-Mech Entero Systems

www.enterosystems.com

enterö
entrance automation

Entero is a world class manufacturer of entrance equipment and systems. Established in 1996 we design & manufacture a comprehensive range of turnstiles, pedestrian gates, speed gates and high security anti-ramming barriers. Entero has in excess of 150 employees covering management, manufacturing and logistics, technical, R&D and sales to ensure that all products manufactured by Entero comply with both local and global standards. We are committed to continuously provide our customers with high quality products, services and solutions. Backed by our experience & creativity, our product meets your requirements.

- Superior High Quality products
- Assurance of Rigidity & Longevity
- Expert advisory for Solution Designing
- Project basis OEM support



ITALY
Design Center



INDIA
Manufacturing Facility (Pune)



Anti Tailgating

Bidirectional Access

Fail Safe Feature

Motorized Mechanism

Access for Handicap

Drop Arm Mechanism

Manual Intervention


www.enterosystems.com

ENT 121- TRIPOD TURNSTILE

It's one of the most popular tripod turnstiles due to its small footprint requirement and yet offering maximum efficiency. With its fast responsive motor and quick operation, it will eliminate crowding at an entrance. Drop arm function efficiently enables free passage in case of emergency. Polished stainless steel finishing will suit any interior. SS 304 standard steel provides high rigidity. The enclosure design is suitable for outdoor installation without an additional canopy. When power goes OFF both directions are free.




Technical Specifications	
Size (L x B x H)	480 x 280 x 980 mm
Unlock Time	0.2 Sec
Pass Rate	35 person / min
Pass Width	550 mm
Weight	45 Kg
Mode	Fail Safe
Power Consumption	30 W
Driving voltage	24 V

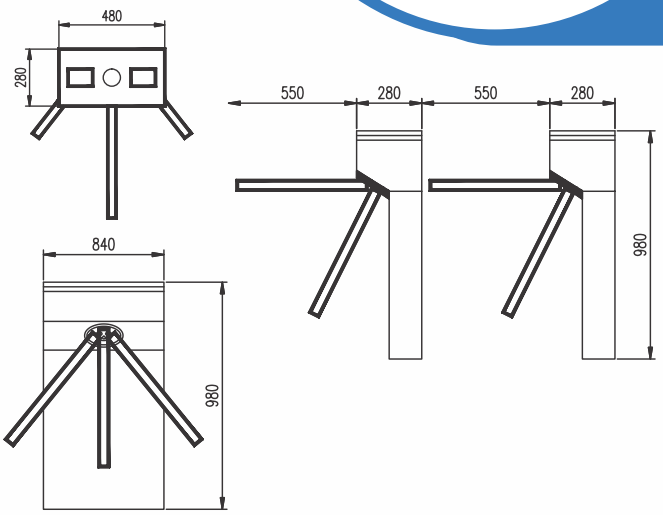

ENT 148- TRIPOD TURNSTILE

Technical Specifications	
Size (L x B x H)	1200 x 280 x 980 mm
Unlock Time	0.2 Sec
Pass Rate	35 person / min
Pass Width	550 mm
Weight	200 Kg
Mode	Fail Safe
Power Consumption	30 W
Driving voltage	24 V



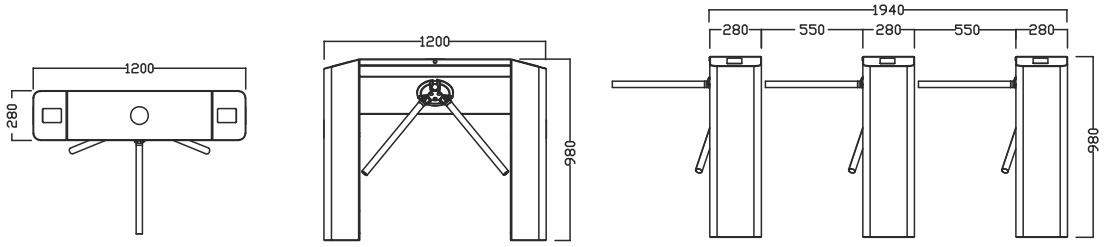


enterö
entrance automation

ENT 302S – FLAP BARRIER GATE

ENT 302S is a type of motorized turnstile featured with sliding flaps operation principle. Housing materials and light weight cabinets' shape make flap barrier universal for large variety of facilities with heightened requirements to esthetic equipment appearance. As well as other barriers of freeway series, we have implemented anti-tailgating function. Sliding flaps are made of glass, polycarbonate is optional.




Technical Specifications	
Size (L x B x H)	1400 x 280 x 980 mm
Unlock Time	0.2 Sec
Pass Rate	35 person / min
Pass Width	550 mm
Mechanism	Motorized
Frame Work	SS 304/316
Power Consumption	35 W
Driving voltage	24 V

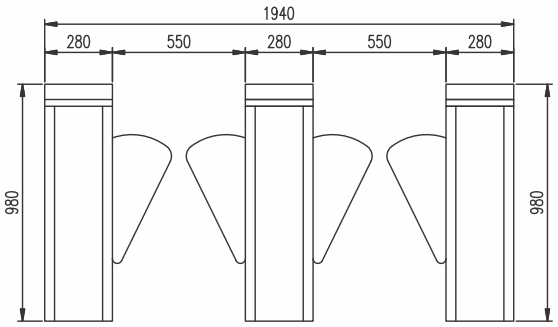



ENT 249- FLAP BARRIER GATE



Technical Specifications	
Size (L x B x H)	1400 x 280 x 980 mm
Unlock Time	0.2 Sec
Pass Rate	35 person / min
Pass Width	550 mm
Weight	120 Kg
Mode	Fail Safe
Power Consumption	30 W
Driving voltage	24 V






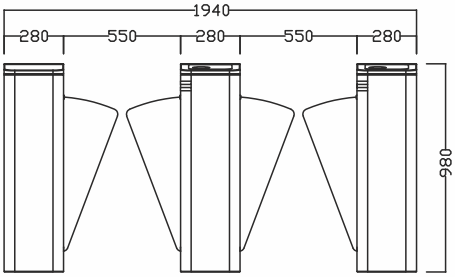


enterö
entrance automation

ENT 306 – SPEED GATE

It is a good choice for projects with main target to sophisticated design. Glass top and side panels, as well as this turnstile's appearance in general, provide the feeling of transparency and make it suitable solution for the most demanding and exquisite interiors. Turnstile's operation principle enables wide lanes establishment.

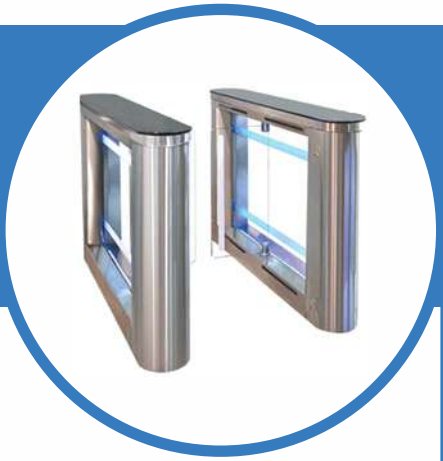

Technical Specifications	
Size (L x B x H)	1400 x 190 x 1020 mm
Unlock Time	0.2 Sec
Pass Rate	35 person / min
Pass Width	550 mm
Weight	200 Kg
Power Consumption	35W
Frame work	SS 304/316
Driving voltage	24 V

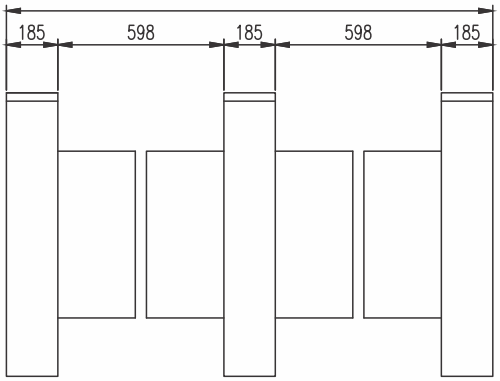



ENT 323 – FULL HEIGHT SPEED GATE

FHSG is a special version of Swing gate, with high glasses. It helps to avoid transfer of anything above the turnstile, as well as over-jumping it. Special design allows arranging even 900 mm passage which can be used for people with special needs. In the same time, both dimensions (height of wings and passage width) can be tailored according to customer's needs. Wings are made from safety tempered glass, but can be also made of polycarbonate.



Technical Specifications	
Size (L x B x H)	1435 x 930 x 1800 mm
Unlock Time	0.2 Sec
Pass Rate	30 person / min
Pass Width	900 mm
Weight	190 Kg
Mechanism	Motorized
Frame Work	SS 304/316
Driving voltage	24 V

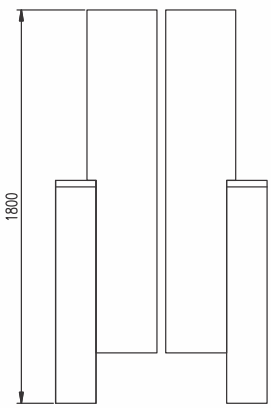




enterö
entrance automation

ENT 315 – SWING GATE


This modification is well applicable to all types of facilities and variety of interiors. Swing Gates have motorized drive. Considering availability of different dimensions, swing gate is a useful solution to provide access control for people with special needs/ disabled. Mostly, these solutions are used together with other turnstiles in purposes of wide lane establishment, up to 1000 mm. Herewith, the design and operation principle enables to get free pass, which is not available dealing with other waist height turnstiles.



Technical Specifications	
Size (L x B x H)	168 x 600 x 1050 mm
Unlock Time	0.2 Sec
Pass Rate	30 person / min
Pass Width	900 mm
Weight	48 Kg
Mechanism	Motorized
Frame Work	SS 304/316
Driving voltage	24 V

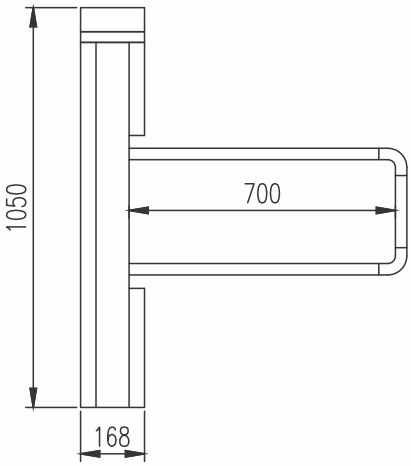


ENT 315G – SWING GATE

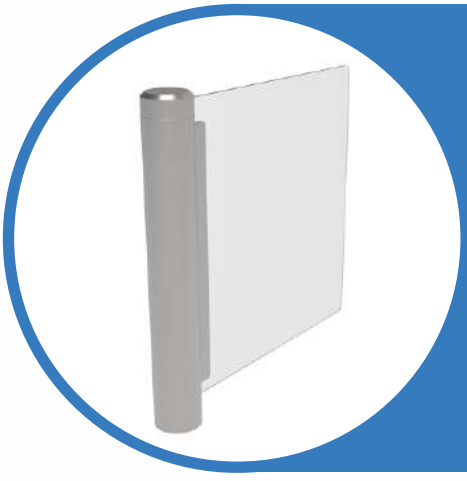

Technical Specifications	
Size (L x B x H)	182 x 1000 mm
Unlock Time	0.2 Sec
Pass Rate	35 person / min
Pass Width	900 mm
Weight	48 Kg
Mechanism	Servo Motor
Frame Work	SS 304/316
Driving voltage	24 V



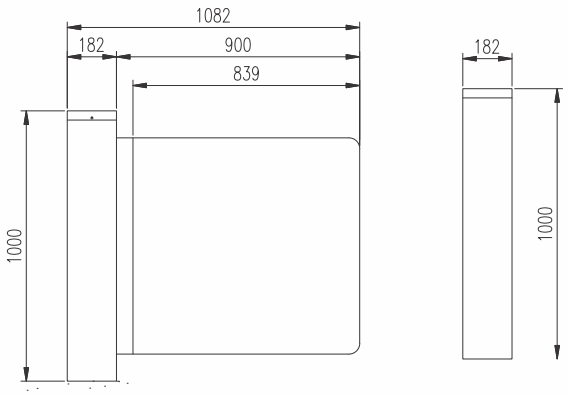


enterö
entrance automation

ENT 401- FULL HEIGHT TURNSTILE

The Full Height turnstiles are robust, highly reliable pedestrian security gate solutions either internal or external applications. The angle is 120˚ with three rotor arms. These vandal proof arms will keep the turnstile secure even after the high force impact, and can be supplied with either a single or double cage with a choice of finish options.





Technical Specifications	
Size (L x B x H)	1630 x 1500 x 2310 mm
Unlock Time	0.2 Sec
Pass Rate	35 person / min
Pass Width	650 mm
Weight	200 Kg
Mode	Fail Safe
Frame work	SS 304/316
Driving voltage	24 V



ENT 408- DOUBLE SIDED FULL HEIGHT TURNSTILE

Technical Specifications	
Size (L x B x H)	2450 x 1500 x 2310 mm
Unlock Time	0.2 Sec
Pass Rate	35 person / min
Pass Width	650 mm
Weight	400 Kg
Mode	Fail Safe
Frame work	SS 304/316
Driving voltage	24 V

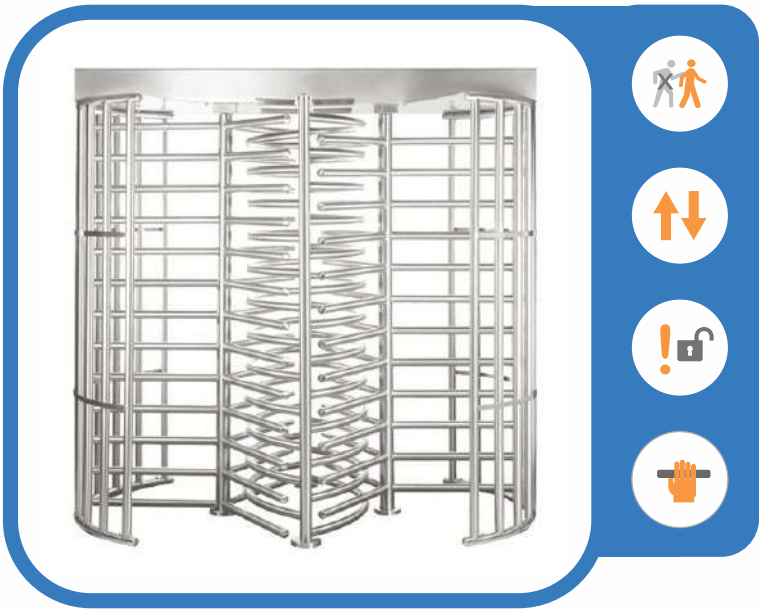

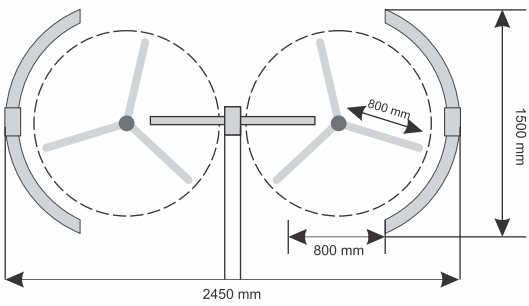

enterö
entrance automation

ENT 1211S – BOOM BARRIER

Automatic boom barrier is equipped with a operator of opening and closing blocks. Housing is available in different RAL colors. High speed of operation makes arm barriers providing high territory security. It should be installed nearby exit / entrance gates and operates in complex with a parking system devices to provide high security access.

Models Available in: Electro-mechanical motor, Servo Motor & PMSM Motor



Technical Specifications


Arm Length	1 m to 6 m
Rated Power	80 W
Speed	0.6s, 1s, 1.6s, 3s, 4s, 6s
IP Rate	54
Weight	48 Kg
Operation	Left & Right
Material	Aluminium Alloy
RC Distance	< 30 m




90° folding arm



180° folding arm



2 Fence arm



3 Fence arm


Features:

- Compact Design
- Compatible with any access control system
- Can be used in both ways (left to right / right to left)
- Unbreakable in case of collision with vehicles


Accessories:

- Loop Detector
- Photo Cell Sensor
- Remote Transmitter
- UHF Reader


Dimensions

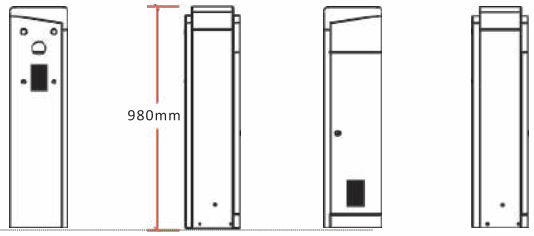

Typical Installation

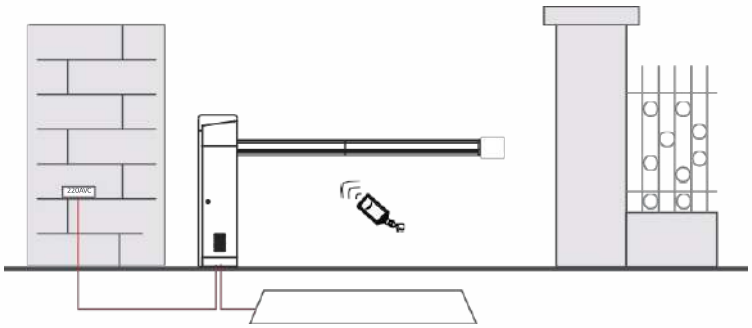

Installation Types

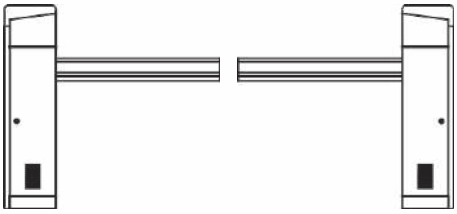

Cabinet on Left side

Cabinet on Right side


enterö
entrance automation

PARKING MANAGEMENT SYSTEM

COMMERCIAL PARKING MANAGEMENT SYSTEMS


Parking Management System is designed as set of unmanned entry station integrated with barrier gate to provide access to the users into the parking facility with barcode ticket or access seasonal cards. Exit lane with manned cashier station integrated with barrier gate to collect parking charges. It is suitable for multi-level indoor parking.

Applications: Malls, Offices, Industries, Parks, Hotels etc

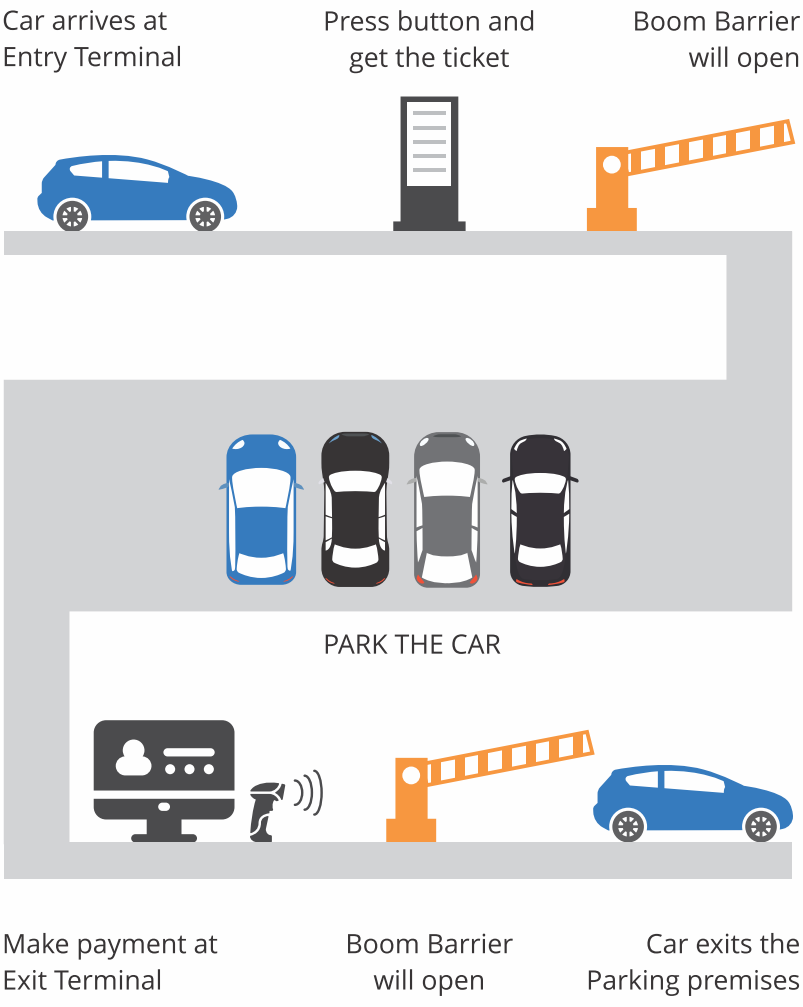

Features:

- High Accuracy
- Longevity
- Time Saving
- Economical
- Revenue Generation
- Configurable with ANPR
- IP systems
- Facility control systems
- Exact IN / OUT date
- Remote Support
- Web Interface
- Automatic Pay Station

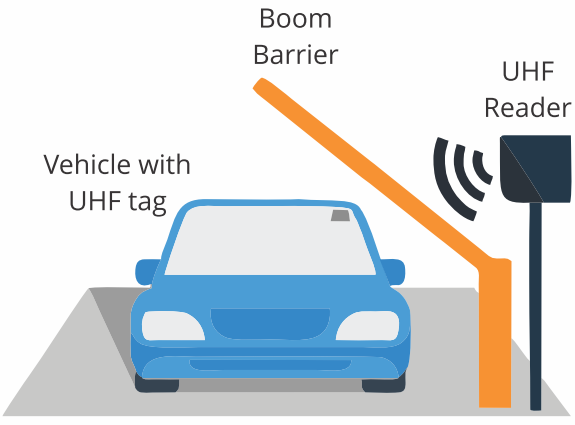

RESIDENTIAL PARKING MANAGEMENT SYSTEM

RPMS provides authorization to permanent or tenant residents. We get exact vehicle IN / OUT data of residents and visitors. This system doesn't require any manual intervention. It is fully automatic system which is Cost Effective, Secure, and Time saving.

enterö
entrance automation

PARKING GUIDANCE SYSTEM

Parking Guidance System is designed as combination of led and sensors on each slots with vacant & occupied (red/green) indication integrated with row / column display to help parking user to find vacant slot to park with in minimum possible time. It is suitable for multi-level indoor parking. Also it is designed to guide user by showing total vacancy in zones or levels. In this system entry/exit points are controlled by sensor to identity vehicle directional movement to provide accurate parking vacancy status on associated areas.

Features:
High Accuracy | Longevity | Time Saving | Revenue Generation
Facility control systems | Exact In / Out data | Useful in multilevel parking




EXTERNAL GUIDANCE SYSTEM

Inform your customers on parking slot availability and location as they approach

- At the approach of your parking entrance, display vacant slots in every level / location with variable message signs (VMS)
- Additional traffic signals can be added to further aid parking guidance at your facility's perimeter



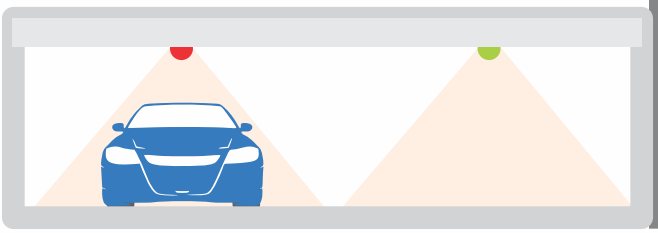

INTERNAL GUIDANCE SYSTEM

Direct your customers to vacant slots at each parking level /location


- Guide your customers with variable directional signs that display green arrows at directions with vacant slots & red cross signs at directions that are full.
- Customers can see vacant slots from a distance with single space detectors mounted at the top of each slot. These detector will emit a green light when the slot is vacant and red when occupied

PARKING GUIDANCE SYSTEM COMPONENTS

- Ultrasonic detector with LED Indicator
- Node controller unit
- Central controller unit (General / Premium)
- Indoor LED display
- Outdoor LED display
- PGS Software

enterö
entrance automation


ENT 803- HIGH SECURITY ROAD BLOCKERS

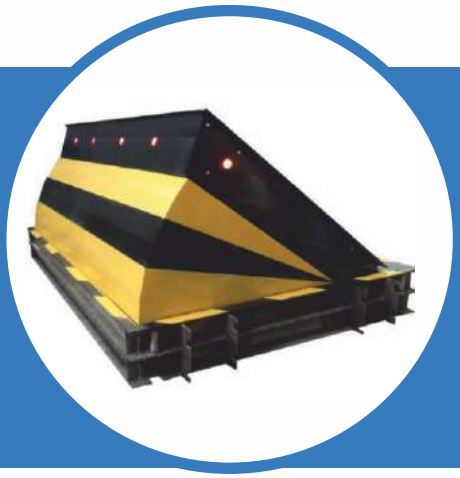


High security road blockers engineered and designed to prevent unauthorized access of vehicles to a secured area and keep the standards of antiterrorism protection. Being developed by engineers with extensive background in appropriate field, this type of wedge barriers is featured with installation simplicity, easy service, reliability, durability, and multi functionality.

Traffic barriers of these series perform high intensity operation. Hereby, customer has an option to get various combinations of modules which will fit project purposes with larger from standard range driveway dimensions.

Technical Specifications	
Height	1200 mm
Width	3000 mm
Drive	Hydraulic
Installation Type	Shallow Mounted
Rising Time	3s, 5s
Lowering time	2s, 5s
Material	Structural Steel
Power Supply	3 phase 240V, 50/60 Hz

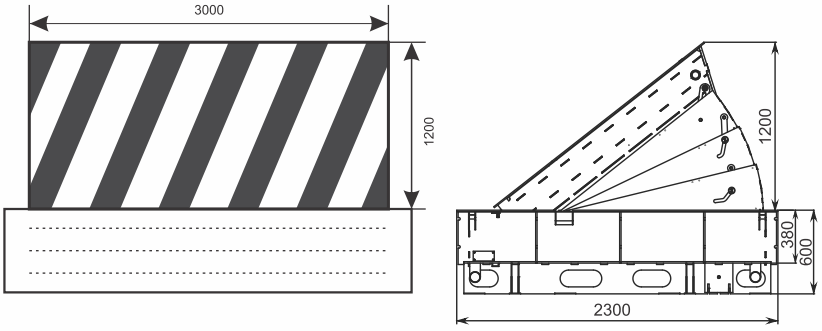


ENT 805- AUTOMATIC BOLLARDS

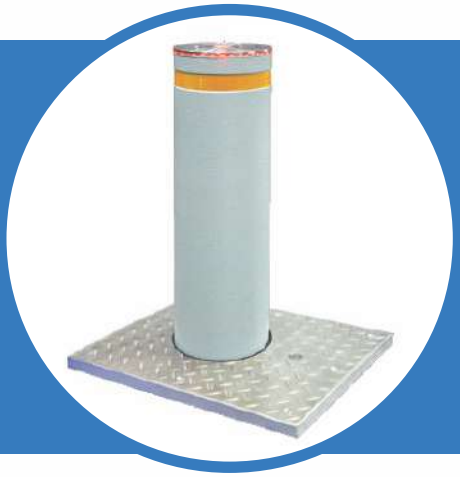

Automatic high security bollards intend to prevent vehicles unauthorized access to secured areas and keep the highest level of antiterrorism protection. Mostly this type of equipment demanded for installation sites with high risk of heavy vehicle attack: public places (stadiums, fairgrounds), governmental institutions, or military infrastructures etc.

Regular set consists of blocking segment with installation case, outside control box with HPU and PLC in it, connection cable and hydraulic/oil hoses, and push button control unit. Wide range of accessories enables trouble less operation under severe environment conditions.


Technical Specifications	
Tube Height	1200 mm
Tube Diameter	325 mm
Wall Thickness	30 mm
Installation Type	Shallow Mounted
Rising Time	312 mm /sec
Lowering time	357 mm / sec
Power Supply	3 phase 240V, 50/60 Hz

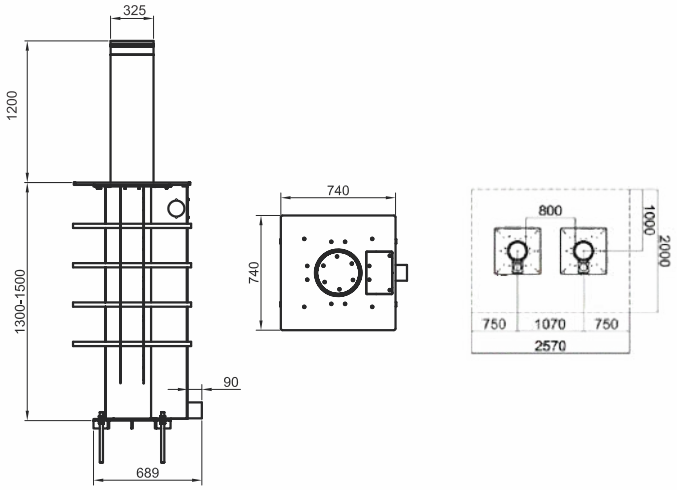


enterö
entrance automation


ENT 1708- AUTOMATIC TYRE KILLERS

Tire-Killers are affordable and at the same time efficient solution for vehicle access control management. Among available configurations, we should stress out installation type options(surface /above the ground or shallow / ground level), one or two directional driveway control, and spikes of varied lengths. The diversity of options enables this traffic barriers to be widely applicable for projects at different sorts of area. The concept of built-in hydraulic unit advances equipment to be suitable for installations under severe climate conditions, as well as for projects which require large distances between PLC and blocking segment.

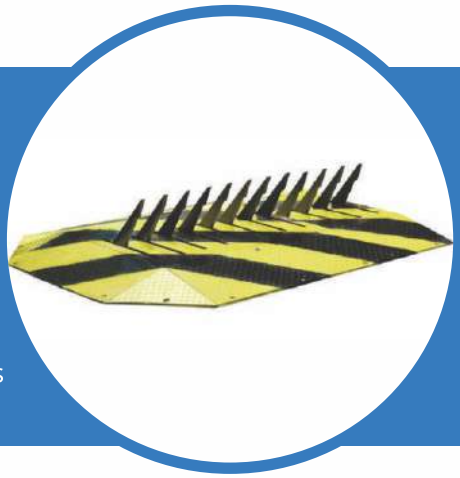

Technical Specifications	
Spike Height	170 mm
Width	3000 mm
Drive	Hydraulic
Installation Type	Shallow Mounted
Rising Time	3s
Lowering time	2s
Material	Structural Steel
Power Supply	3 phase 240V, 50/60 Hz

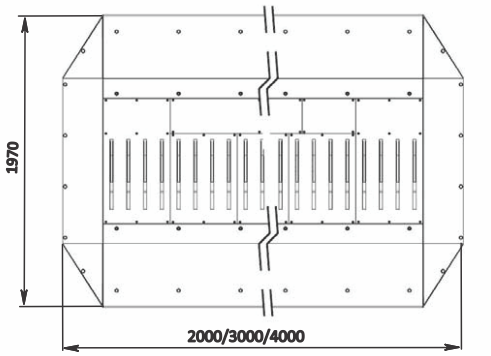


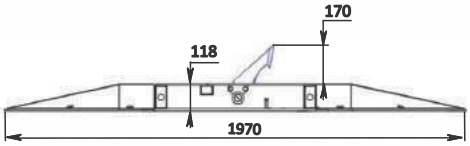


ENT 1089- RETRACTABLE GATES



Retractable Gates are the finest examples of modern high technology and production technology. A Retractable Gate comprises numerous components and each component is fused so naturally and seamlessly with others to become a complete gate. Despite of its complex composition and structure, each gate is designed and developed for simplicity and ease in operation.

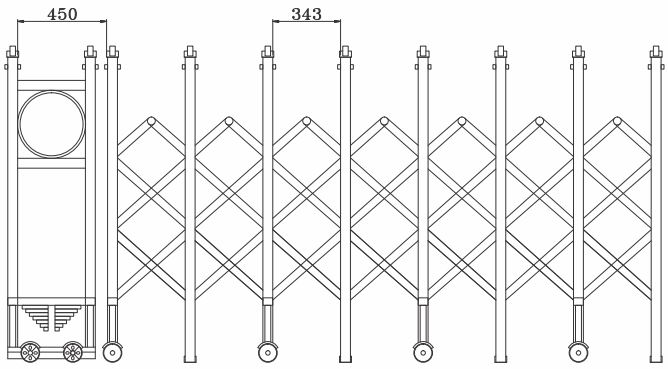

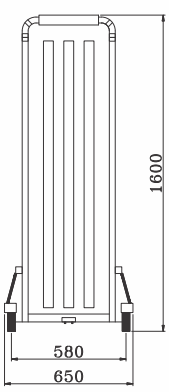

enterö
entrance automation

Solutions

- Adventure park management
- Employee Management
- Man less Parking System
- Airport Management
- Warehouse Management
- Commercial / Residential Entrance
- Gym Management
- Visitor Management
- Railway Stations
- Labor management
- Education Industry
- Sports Complex / Stadiums


enterö
entrance automation

sales@enterosystems.com
www.enterosystems.com

OUR PROJECTS



Workafella, Hyderabad

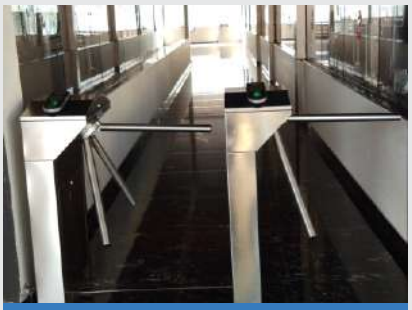

Silver Sports, Pune



OPGC, Odisha



Hyatt, Pune



Asian Paints, Maharashtra



IIT, Indore



Kenpoly, Kenya



Amaazia, Gujarat

Notable Mentions from our Client base

NDA, PUNE
J & K POLICE DEPT
SUNNY'S WORLD, PUNE
XPERIA, PALAVA



ISO Certification



CE Certification



FCC Certification



RoHS Certification

enterö
entrance automation

+91-9373085760
sales@enterosystems.com
www.enterosystems.com