



NOTE
1. THE STRUCTURE/ PARAPET AROUND THE CUT OUT SHOULD BE OF FLAT SURFACE FOR PROPER FASTENING OF ROOF.
2. TOP SURFACE SHOULD BE OF PARALLEL / FLAT FOR SMOOTH FUNCTIONING OF ROOF.
3. ROOF EXTENSION IS SHOWN FOR ONLY REFERENCE. IT CAN BE MODIFIED AS PER THE WORK UNDERTAKEN.
4. GRADIENT OF 50MM X 60 MM NEED TO BE PROVIDED ALONG THE OUTER LENGTH TO AVOID WATER STAGNANCY IN GUIDE RAIL.
5. AL PROFILE - POWDER COATED
6. GASKET - EPDM
7. MOTOR - ITALIAN/GERMAN MAKE
8. ELECTRICAL REQUIREMENT -
9. ALL DIMENSION IN MM.
10. ALL CIVIL WORK ARRANGEMENT IS IN CLIENT SCOPE.

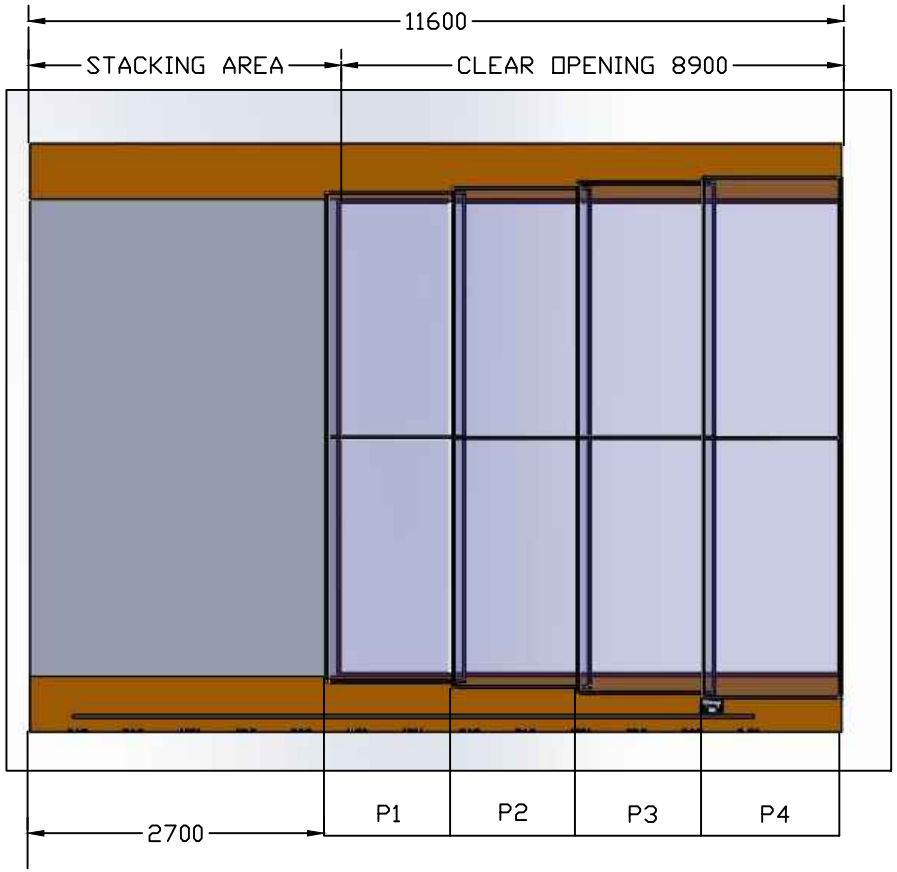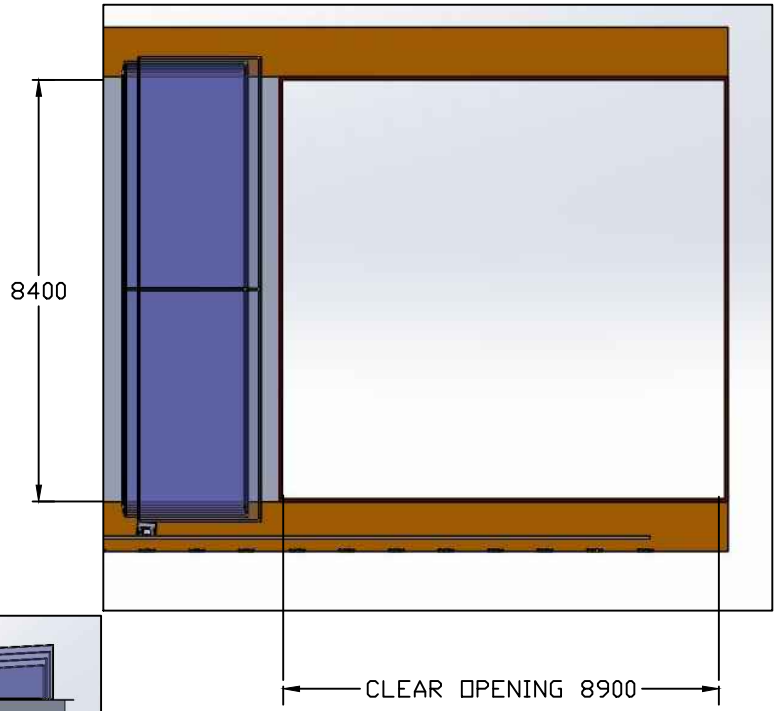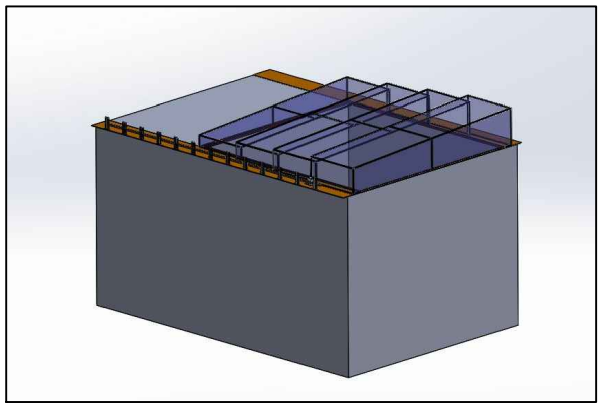

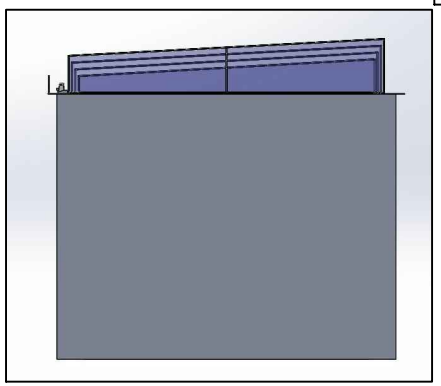

| | | | | |
|---|---|---|---|---|
| TITLE - PROPOSED PLAN LAYOUT | | | | NIHVA TECHNOLOGIES PVT.LTD.PUNE Website - www.nihva.com |
| | NAME | SIGNATURE | DATE | CLIENT - |
| DRAWN | S.W | | 25.07.2023 | PRODUCT - RETRACTABLE ROOF |
| CHK'D | P.M. | | 25.07.2023 | SITE LOCATION - |
| APPV'D | V.T. | | 25.07.2023 | |
| if any queries contact - supportautomation@nihva.com | | | | REVISION - 0 |
| ALL DIMENSION ARE IN mm | | A3 | | SCALE - 1:1 SHEET 1 OF 1 |