eSSL

Technology Development Company



Bridge type - TS2000 series:

TS2000	TS2011	TS2022
Tripod Turnstile	RFID	FP + RFID

Turnstiles- TS2000

Type : Bridge Tripod

Arm Length : 50cm

Max tolerance of Arms : 80 Kg

Angle per rotation : 120 ^{0}

Operation Type : Oneway - Bidirectional

Flow Rate : 25-48 passages/minute

Input control signal : Dry contact

Ingress protection Degree : IP54

Opening Duration : 5s - 60s

Primary controller (Inbuilt):

CPU : 32 bit Microprocessor

Opening Signal Input : yes

Emergency Switch Input : yes

Direction Indicator Output : yes

Passing Indicator Output : Yes

Drop Arm Electromagnet Output : Yes

Optional Interface :

Any Standalone access controller system

Eg. X990, IFACE, SC403,X7,SF101,F702 etc.

Power Supply :

SMPS - Input : AC 220V / 110V, 50Hz / 60Hz

SMPS - output : DC +24V, 5A; +12V, 3A

Dimension(mm) : L = 520, W = 280, H = 980


Gross Weight : 54kg

Operating Temprature : -28^{0}C to +60^{0}C

Operating Humidity : 5% - 85%

Operating Environment : Indoor & Outdoor(shelter)

Dimension : (All units in mm)

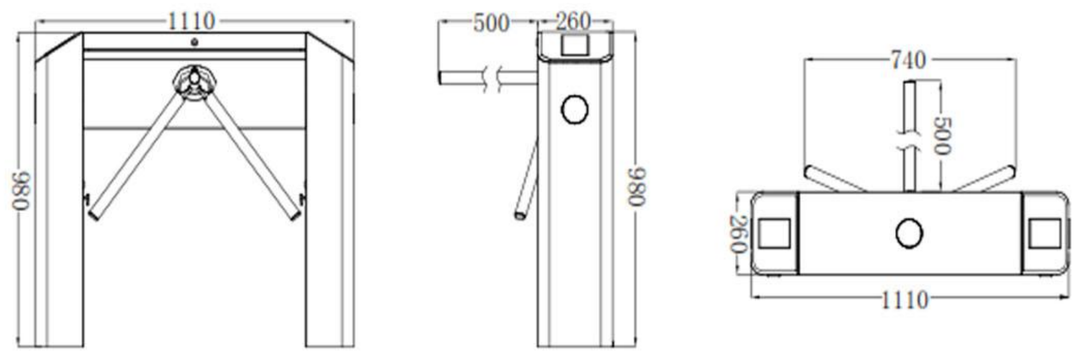

Disclaimer: Brief specifications are mentioned here.Specifications may change without prior notice. Customers are advised to check with us before purchase. Actual product may differ slightly to that depicted for ongoing product development