CLIENT

WEIGHT ESTIMATION SHEET


CLIENT	Rockman industries	DATE	08-08-2024
PROJECT	Motorised Single Leaf Sliding Gate (One side opening)	LOCATION	Pune
FINISH SIZE	4.5 m x 1.18 m + (Overlap 1.8m)	PREPARED BY	Sumit

SR	DESC	DETAILS	MATERIAL GRADE	SP.GRAVITY	DIA	WIDTH	HEIGHT	THICKNESS	LENGTH	UOM	QUANTITY	WEIGHT	REMARK
1	SINGLE LEAF (6.3M X 1.18M)	Tube - Outer Frame	MS	7.85		50	50	4	21260	mm	1	123	254
		Vertical Inner Support - Tube	MS	7.85		50	50	4	4320	mm	1	25	Weight OF leaf
		Welded Wire Mesh (1190x740)	MS	7.85						No's	4	16	
		MS Sheet (1230X340X1.5mm)	MS	7.85						No's	5	90	
2	Post	Post Tube	MS	7.85		100	100	4	10800	mm	1	130	
		Post Tube top Roller Mounting Plate (375x200x12mm)	MS	7.85						No's	4	29	
		Post Tube Top Mounting Plate (200x200x10mm)	MS	7.85						No's	4	16	
		Post Bottom Mounting Plate (200x200x10mm)	MS	7.85						No's	6	24	
		Post Bottom Mounting Plate (150x200x12mm)								No's	6	19	
3	Bottom Track	En 8 Bright Hardchrome Bar	En8	7.85	8				1.2	M	1	3	
		En 8 Bright Hardchrome Bar	En8	7.85	25				12.6	M	1	52	
		If L Angle 65x65x8mm	MS	7.85					12.6	M	1	101	
		Rack & pinion							6.3	M	1		
4	Accessories	Bottom Side wheel Assembly (4 inch)	MS	7.85						No's	4		
		Nylon Roller with bearing (Ø80 mm)								No's	20		
										Weight For Required Qty	1	628	
										Weight Including Safety Factor	1.5	942	

Mode Of Operation = Motorised

Motor Selection = According | 380.7 | kg

REFERENCE IMAGE

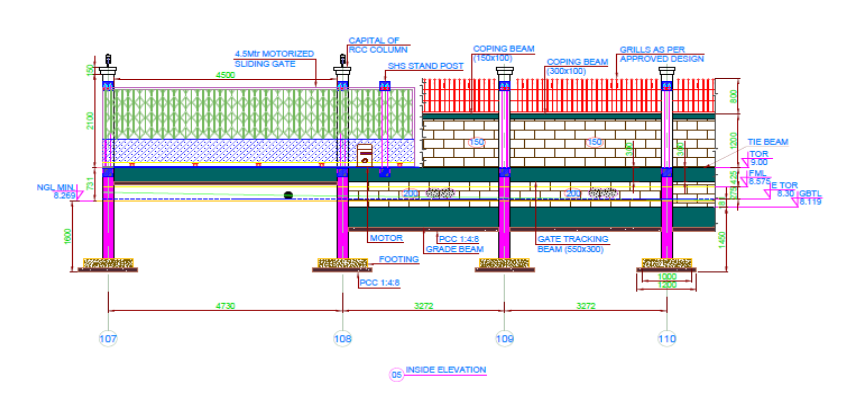

Specification

Electro-mechanical Geared Actuator, Controller and Sensors for Sliding gates: Providing, erection, installation, testing and commissioning of electro- mechanical geared motor actuator with rack and pinion type drive gear arrangement for sliding gates, safety sensor, bright bar, sounder with beacon necessary operating controls and wiring. Facility for manual operation in case of power failure, obstruction detection-stop and reverse function, facility for partial opening, automatic closing, and revere safety , warning lamp etc. shall be provided as standard. The controls shall include remote operation with wireless remote control and RFID. Follow weatherproof enclsoure and can smoothly operate the designed gate weight smoothly

Recommended and bench-marked products: Ditec Italy / Nice Italy

CLIENT

WEIGHT ESTIMATION SHEET


CLIENT	Rockman industries	DATE	08-08-2024
PROJECT	Motorised Single Leaf Sliding Gate (One side opening)	LOCATION	Pune
FINISH SIZE	10.0 m x 1.8 m + (Overlap 1.8m)	PREPARED BY	Sumit

SR	DESC	DETAILS	MATERIAL GRADE	SP.GRAVITY	DIA	WIDTH	HEIGHT	THICKNESS	LENGTH	UOM	QUANTITY	WEIGHT	REMARK
1	SINGLE LEAF (11.8 M X 1.18M)	Tube - Outer Frame	MS	7.85		50	50	4	39000	mm	1	225	584
		Vertical Inner Support - Tube	MS	7.85		50	50	4	15300	mm	1	88	Weight OF leaf
		Welded Wire Mesh (1400x740)	MS	7.85						No's	9	54	
		MS Sheet (1230X340X1.5mm)	MS	7.85						No's	12	216	
2	Post	Post Tube	MS	7.85		100	100	4	10800	mm	1	130	
		Post Tube top Roller Mounting Plate (375x200x12mm)	MS	7.85						No's	4	29	
		Post Tube Top Mounting Plate (200x200x10mm)	MS	7.85						No's	4	16	
		Post Bottom Mounting Plate (200x200x10mm)	MS	7.85						No's	6	24	
		Post Bottom Mounting Plate (150x200x12mm)								No's	6	19	
3	Bottom Track	En 8 Bright Hardchrome Bar	En8	7.85	8				3	M	1	4	
		En 8 Bright Hardchrome Bar	En8	7.85	25				22	M	1	88	
		If L Angle 65x65x8mm	MS	7.85					22	M	1	176	
		Rack & pinion							12	M	1		
4	Accessories	Bottom Side wheel Assembly (4 inch)	MS	7.85						No's	5		
		Nylon Roller with bearing (Ø80 mm)								No's	20		
										Weight For Required Qty	1	1070	
										Weight Including Safety Factor	1.5	1605	

Mode Of Operation = Motorised

Motor Selection = According | 875.6 | kg

REFERENCE IMAGE

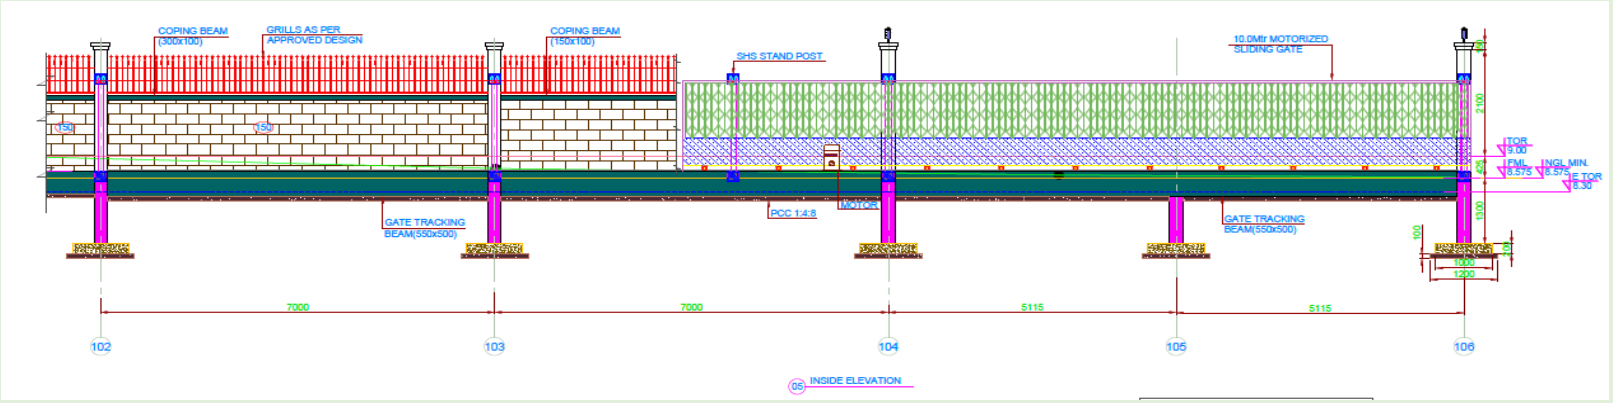

Specification

Electro-mechanical Geared Actuator, Controller and Sensors for Sliding gates: Providing, erection, installation, testing and commissioning of electro- mechanical geared motor actuator with rack and pinion type drive gear arrangement for sliding gates, safety sensor, bright bar, sounder with beacon necessary operating controls and wiring. Facility for manual operation in case of power failure, obstruction detection-stop and reverse function, facility for partial opening, automatic closing, and revere safety , warning lamp etc. shall be provided as standard. The controls shall include remote operation with wireless remote control and RFID. Follow weatherproof enclsoure and can smoothly operate the designed gate weight smoothly

Recommended and bench-marked products: Ditec Italy / Nice Italy

CLIENT													
WEIGHT ESTIMATION SHEET													
CLIENT			Rockman industries								DATE	08-08-2024	
PROJECT			Wicket Gate								LOCATION	Pune	
FINISH SIZE			1.5 m x 1.8 m								PREPARED BY	Sumit	
SR	**DESC**	**DETAILS**	**MATERIAL GRADE**	**SP.GRAVITY**	**DIA**	**WIDTH**	**HEIGHT**	**THICKNESS**	**LENGTH**	**UOM**	**QUANTITY**	**WEIGHT**	**REMARK**
1	SINGLE LEAF (1.5 M X 1.8 M)	Tube - Outer Frame	MS	7.85		50	50	4	6600	mm	1	38	80
		Vertical Inner Support - Tube	MS	7.85		40	40	3	12000	mm	1	42	Weight OF leaf
		MS Sheet (300x1400x1.5mm)	MS	7.85						No's	1	4	
2		MS Plate (180x300x100mm)	MS	7.85						No's	2	10	
		Post	MS	7.85						Nos	1	15	
3	Accessories	Hinges	MS	7.85						No's	2	0	
		Manual Lock	MS	7.85						No's	1	0	
										Weight For Required Qty	1	109	
										Weight Including Safety Factor	1.5	163	
Mode Of Operation = Manual													

REFERENCE IMAGE

