

PROPOSED PLAN LAYOUT

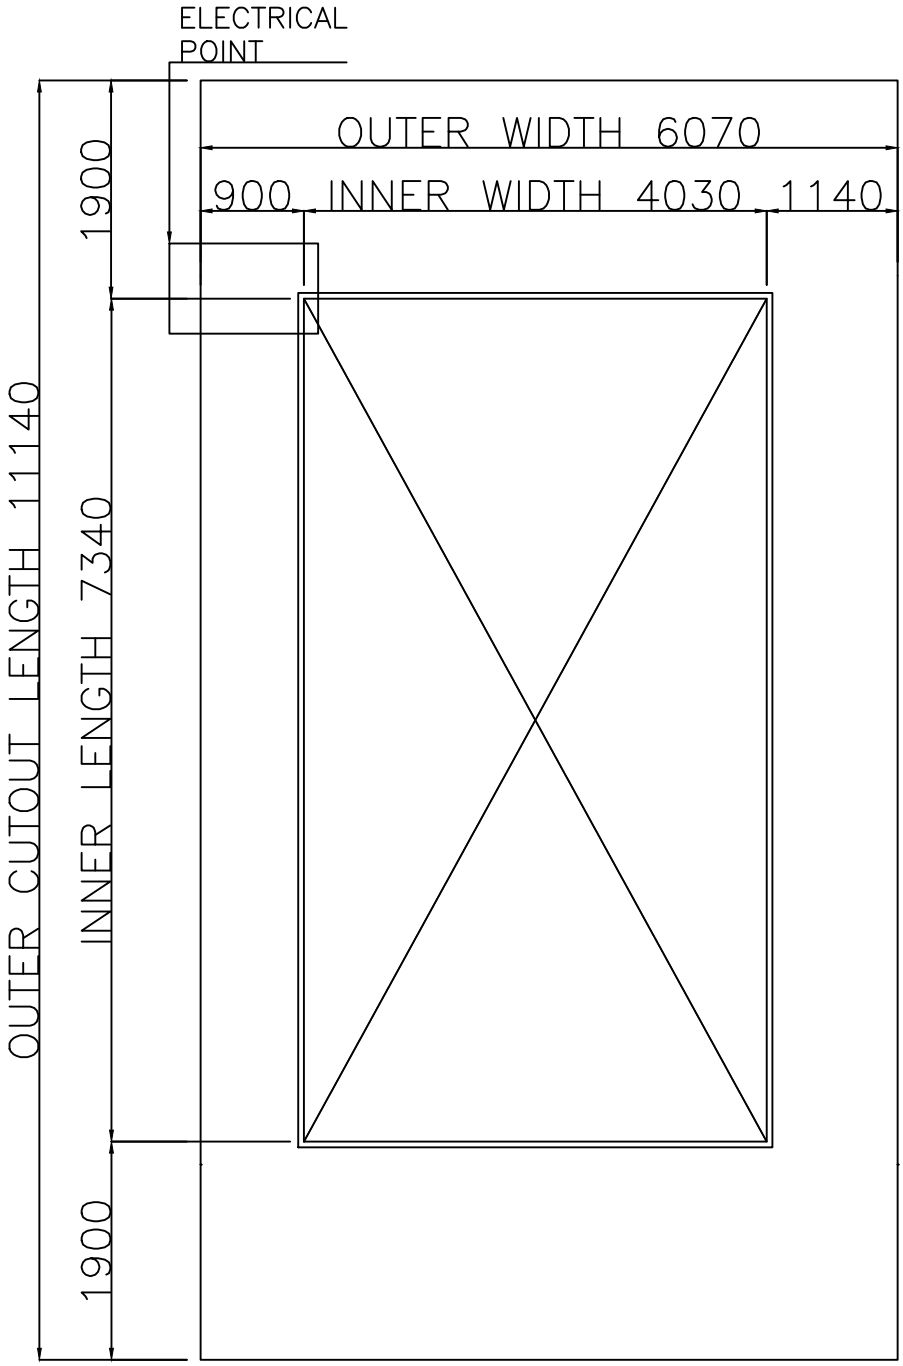

PROPOSED PLAN

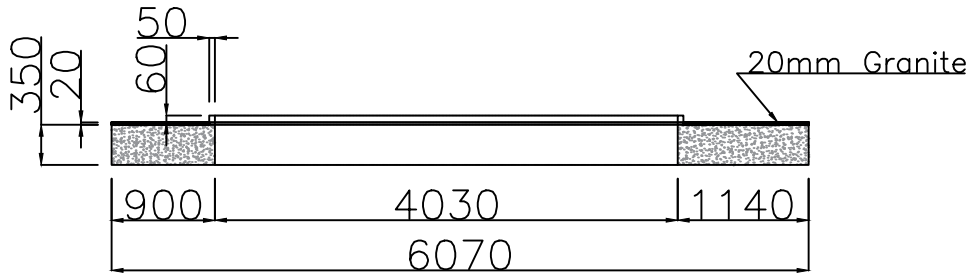

SECTION VIEW

1. THE STRUCTURE AROUND THE CUT OUT SHOULD BE OF CONCRETE FOR FOR PROPER FASTENING OF ROO
2. BOTH SIDE TERRACE LEVEL SLAB TO BE CAST TO MATCH THE CUT OUT DIMENSION.
3. TOP SURFACE SHOULD BE OF GRANITE 20MM FOR SMOOTH FUNCTIONING OF ROOF.
4. ROOF EXTENSION IS SHOWN FOR ONLY REFERENCE. IT CAN BE MODIFIED AS PER THE WORK UNDERTAKEN
5. GRADIENT OF 50MM NEED TO BE PROVIDED ALONG THE OUTER LENGTH TO AVOID WATER STAGNANCY IN GUIDE RAIL.
6. AL PROFILE - POWDER COATED
7. GASKET - EPDM
8. MOTOR - ITALIAN/GERMAN MAKE
9. ELECTRICAL REQUIREMENT - 220V 5AMP SINGLE PHASE CONNECTION.
10. ALL DIMENSION IN MM.

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE: PROPOSED PLAN LAYOUT				NIHVA TECHNOLOGIES PVT. LTD.	
	NAME	SIGN	DATE		
DRAWN	S.S.		22.09.22	CLIENT - DR. ANUJ	
CHECK	A.K.		22.09.22	LOCATION - MORADABAD_UP_IN	
APPRD.	V.T.		22.09.22	PRODUCT - RETRACTABLE ROOF	
If any queries contact : projectsautomation@nihva.com				NIHVA\22-23\02XX	REV- 0
ALL DIMENSION ARE IN mm				SCALE: NTS	SHEET: 01 OF 01