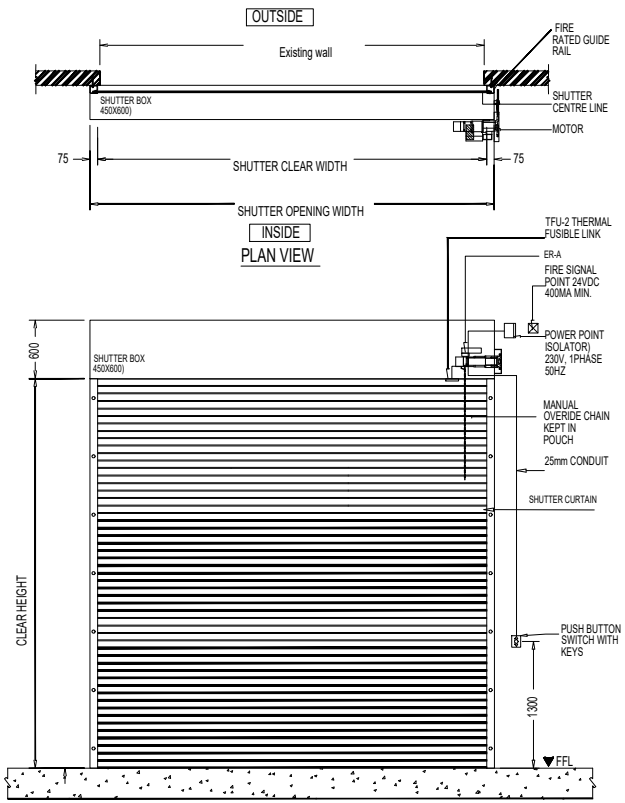
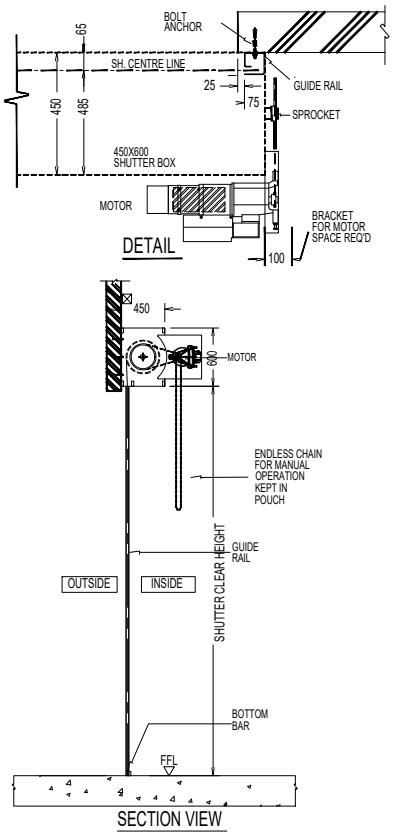
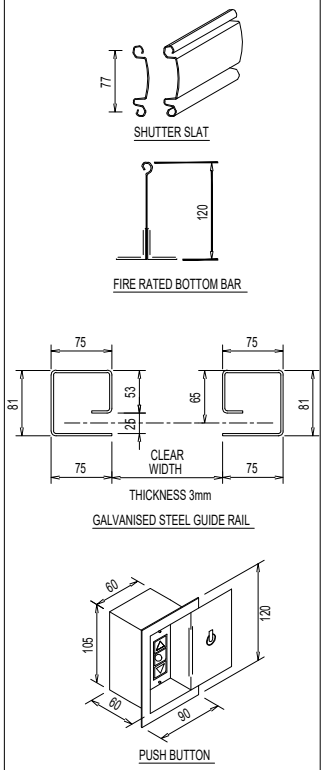



## TECHNICAL SPECIFICATIONS :

| SR. | SPECIFICATION | DETAILS |
|---|---|---|
| 1. | Description & Drive | Fire Rated Rolling Shutter |
| 2. | Location Area | Inside/Out side |
| 3. | Mounting Surface | Confirm by client |
| 4. | Slat | GI Slat -97 mm Pitch 0.8mm/1.2mm Thick |
| 5. | GI Guide Rails | "G" shaped |
| 6. | Box Cover & Motor Cover | Galvanized steel 0.8 mm thick |
| 7. | Standard Motor | 1P/230V/50HZ Motor |
| 8. | Push Botton | 3 Way Push Baton on Single Side |

## SIZES :

| SR. | CLEAR WIDTH | CLEAR HEIGHT | QTY. |
|---|---|---|---|
| 01 | 2000 | 4000 | 01 |
| 02 | 5000 | 5000 | 01 |

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern

TITLE :-
MOTORISED FIRE RATED ROLLING SHUTTER

| | NAME | DATE |
|---|---|---|
| DRAWN | B.S. | 11/08/2025 |
| CHECK | S.W. | 11/08/2025 |
| APPROVAL | V.T. | 11/08/2025 |

ALL DIMENSION ARE IN mm

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

CLIENT - INDOSOL

PROJECT -MOTORISED FIRE RATED ROLLING SHUTTER

DWG. NO. : NIHVA-24-25-00XX | REV-00

SCALE: NTS | WT: | SHEET: 01 OF 01

If any queries contact : design@nihva.com