


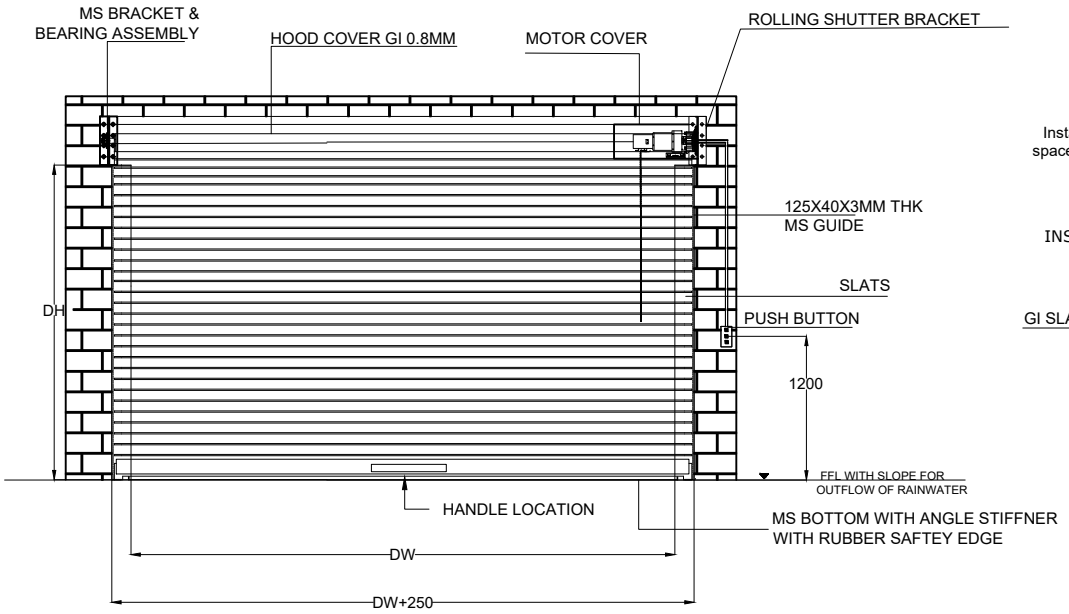


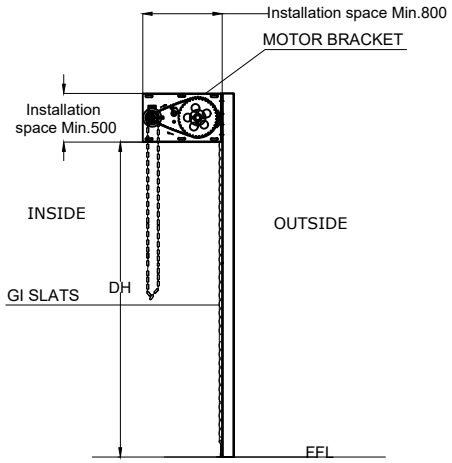

SIDE VIEW

ELEVATION

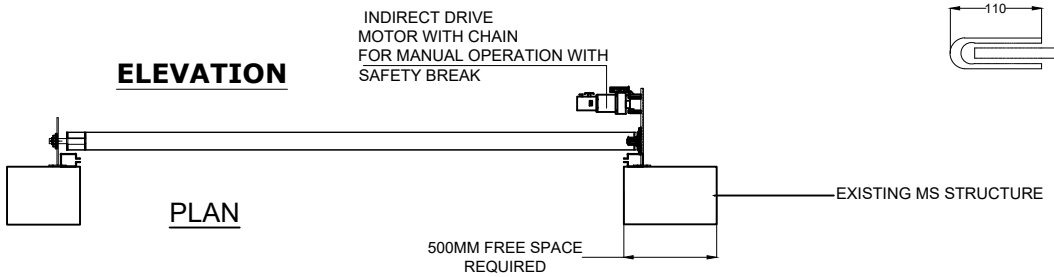



TECHNICAL SPECIFICATION:-

Sr .No.	Specification	Details
1	Description & Drive	Motor Opearated Double Wall Puff Insulated Rolling Shutter
2	Slat	95 x 19 mm Puff Filled Slat
3	Motor	Jielong Make 3 Phase Indirect Drive With Chain For Manual Operating
3	Guide	U Guide 110 x 32 x 2 mm Thk
4	Bottom Profile	M. S. Plate 100 mm x 2.5 mm thick with angle stiffener (25 x 25 x 5 mm)
5	Mounting Location area	Inside area / Outside area
6	Mounting Surface	Structure Mounting
7	Hood Cover	Made of GI Sheet Thickness 0.9 mm
8	Surface finish	As per Client Requirement

SIZE:-

DW	DH	QTY
4260	2440	1 No.

NOTE:-

1. All dimensions are in MM
2. Required civil work will be in client scope
3. Required MS structure mounting will be in cllient scope

NIHVA TECHNOLOGIES PVT. LTD.

CLIENT - Ingersoll Rand .Ltd

PROJECT - Motorised Rolling Shutter (Indirect Drive)

	NAME	DATE	SITE -		
DRAWN	S.J	28/12/2023	DWG. NO. -NIHVA/SO/23-24/058		REV.00
CHECK	A.K	28/12/2023	SCALE: 01	WT:	SHEET: 01 OF 01
APPRD	V.T	28/12/2023	If any queries contact : design1@nihva.com		