

S IS THE PROPERTY OF NIHVA TECHNOLOGIES PVT. LTD AND MUST BE RETURNED ON REQUEST. THIS IS SUBMITTED AS CONFIDENTIAL INFORMATION IN CONNECTION WITH OUR ENQUIRY/TENDER/ORDER OR CONTRACT. THIS MUST NOT BE USED COPIED OR LENT FOR ANY PURPOSE WITHOUT OUR AUTHORITY IN WRITTING

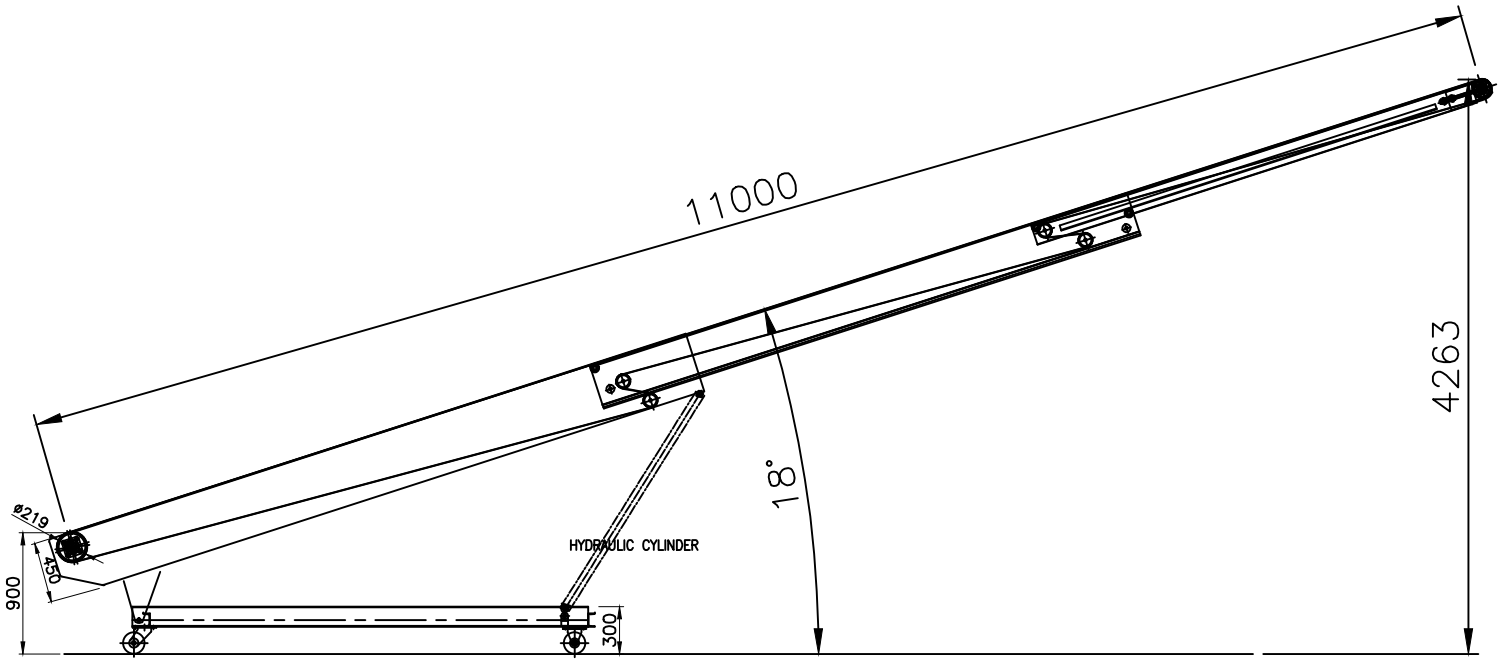

ELEVATION

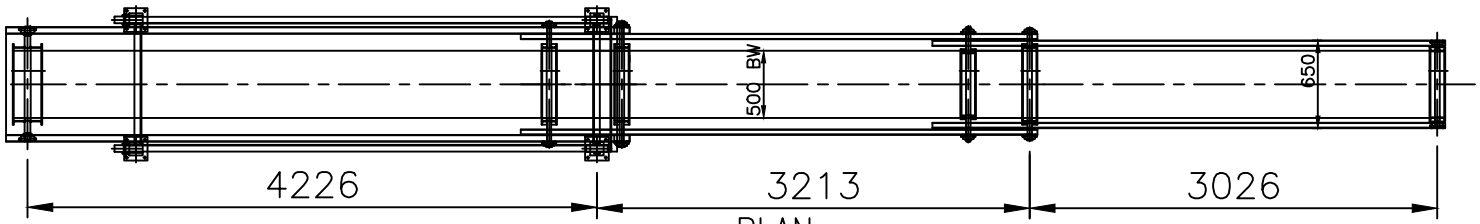

PLAN

TECHNICAL SPECIFICATIONS OF TELESCOPIC CONVEYOR

S.NO.	DESCRIPTION	TELESCOPIC CONVEYOR
1	TYPE	: TELESCOPIC CONVEYOR (REVERSIBLE)
2	MATERIAL CARRIED	: CARTON BOXES / BAGS
3	WEIGHT	: 10–50 KGS
4	LENGTH	: 11000 MM
5	LIFT	: 4.25 MTRs.
6	SPEED	: 30 MPM
7	MOTOR	: 2 HP/1440 RPM ; 1 HP/1440 RPM
	MAKE	: KIRLOSKAR/ABB/SIEMENS
8	GEAR BOX	: AS 35 ; 73 RPM ;
	MAKE	: BONFIGLIOLI
9	BELT	: 500 MM WIDE, ROUGH TOP BELT
10	HEAD DRUM DIA / LENGTH	: 168 MM / 550 MM LONG
	SHAFT DIA	: 50 MM
	BEARING DIA	: 40 MM / UCF–208
11	TAIL DRUM DIA / LENGTH	: 140 MM / 550 MM LONG
	SHAFT DIA	: 40 MM
	BEARING DIA	: 30 MM / UCF–206
12	SNUB DRUM DIA / LENGTH	: 101 MM / 550 MM LONG
	SHAFT DIA	: 40 MM
	BEARING DIA	: 30 MM
13	RETURN IDLER / TYPE	: FLAT, SINGLE ROLL 60.3 MM/550 MM LONG
	SPACING	: 2000 MM
14	CONVEYOR FRAME TYPE	: DELUXE TYPE
15	TAKE–UP	: SCREW TAKE–UP
16	WHEELS	: 4 NOs. CASTOR WHEELS PROVIDED
17	LIFTING MECHANISM	: HYDRAULIC CYLINDER. POWER PACK, 1.0 HP
18	EXTENSION MECHANISM	: CHAIN & SPROCKET WITH 0.5 HP BRAKE MOTOR & GEAR BOX W 63, 17 RPM
19	GUIDE ROLLER	: PROVIDED
20	CONTROL PANEL, CONTROL WIRING, PLC CONTROL, WITH REMOTE	: PROVIDED
21	MATERIAL OF CONSTRUCTION	: MS
22	PAINTING	: POWDER COATED, SIEMENS GRAY
23	QUANTITY	: 1 NO.

NOTE :– ALL DIMENSIONS ARE IN "MM"

NIHVA TECHNOLOGIES PVT. LTD.
TEL: 02066304033
Email: supportautomation@nihva.com
Website: www.nihva.com

CUSTOMER	PS–		
TITLE	G.A.OF TELESCOPIC CONVEYOR		
DESIGN	P.S		SCALE
DRAWN	A.M.K		NIL
CHECKED	R.R.K	DATE	27.12.2007
APPROVED	P.S	REV.	A
DWG. NO.	MCPL/PS–	REF DEG.	