
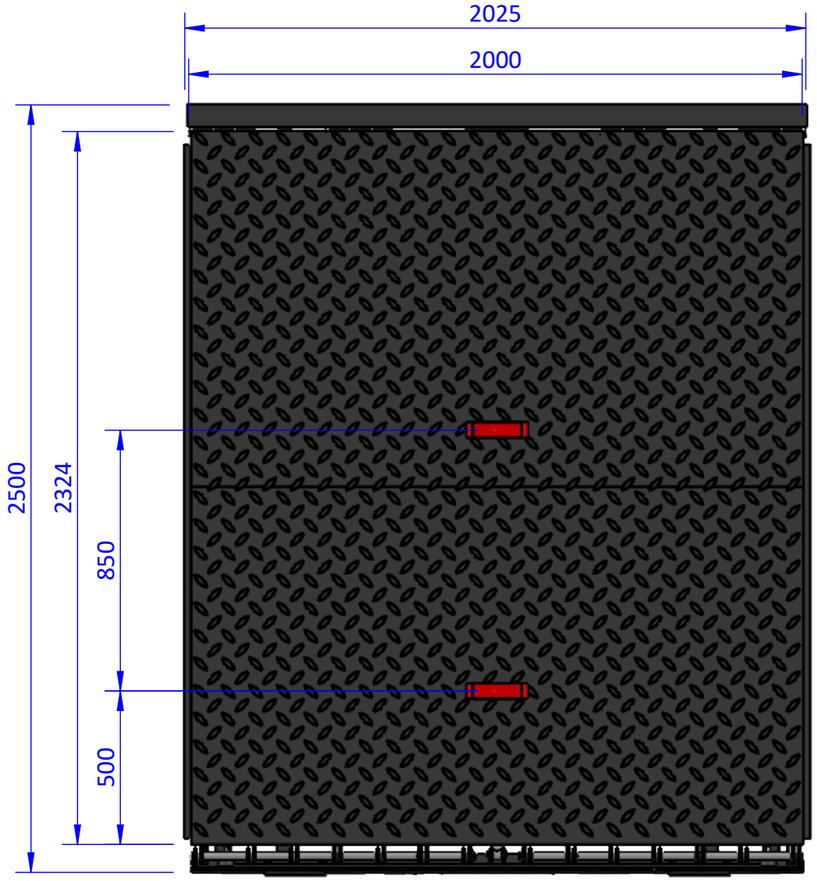


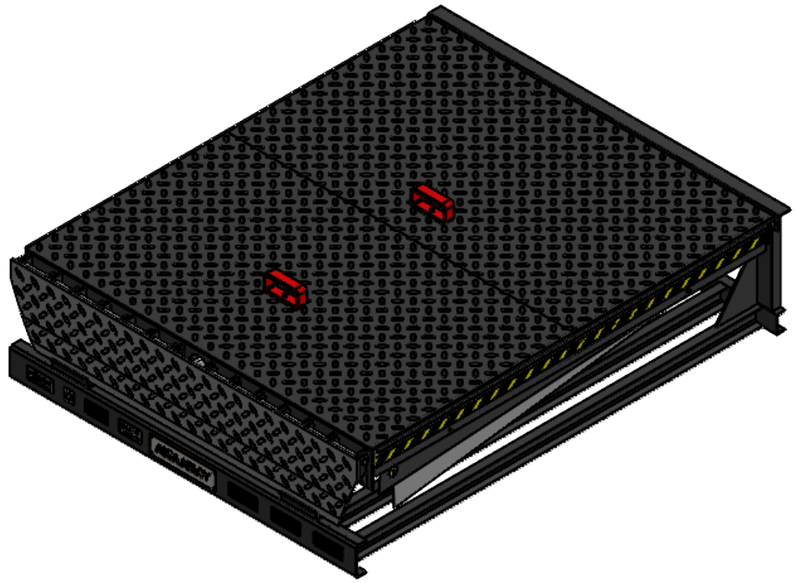

DOCK LEVELER SPECIFICATIONS

SIZE- 2000X2500X600
CAPACITY- 6 TON
SWING LIP SIZE- 2000X400X10

MAIN CYLINDERS (Double Cylinder)

Dia= ∅ 45mm, Length = 630mm
Piston Dia. = 30mm, Stroke = 451mm

SWING LIP CYLINDER


Dia= ∅ 55mm, Length = 273mm
Piston Dia.=30mm, Stroke =100MM


Longitudnal Support

I-Beam 125x70x6 = (2 Nos.)
L-Plate 150x38x4 = (8 Nos.)

Hydrualic Unit= 1.1kw, 380V, 3 Phase

Thickness of plate = 8 mm

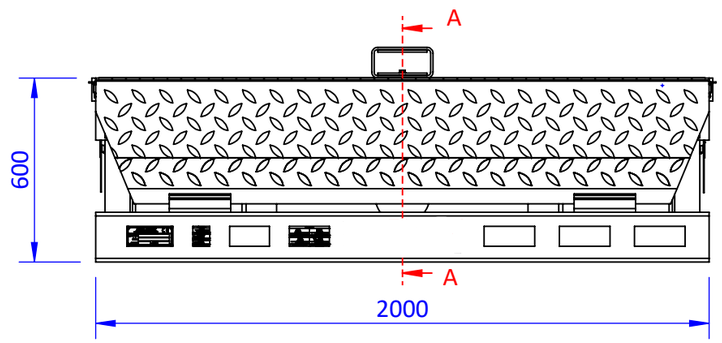

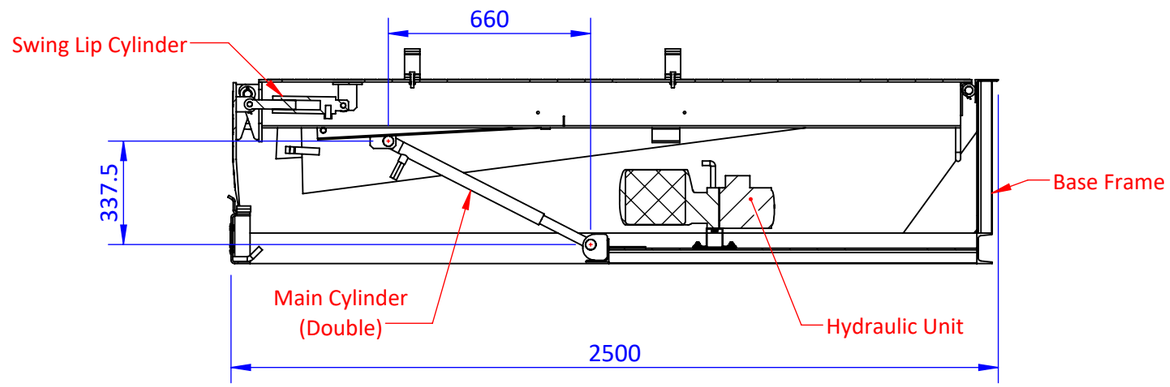

SECTION A-A

Permissible deviations for linear dimensions									
Tolerance Class		Permissible deviation for basic size range							
Designation	Description		over	over	over	over	over	over	over
		0.5	3	6	30	120	400	1000	2000
		to	to	to	to	to	to	to	to
		3	6	30	120	400	1000	2000	4000
c	coarse	±0.2	±0.3	±0.5	±0.8	±1.2	± 2	±3	±4

NIHVA

187, G-Block,
Thermax
chowk,MIDC
Chinchwad, Pune -
411019

Dep.	Config.

Projection	Tol.	Ref. Table	Drawn By	B.S	Project
	NC-File		Dr. Date	03/06/2025	NTPL - 716 - SO
	SheetM.		Chkd By	S.W	
Material	---		Ch.date	03/06/2025	
Finish			Dim.	mm	
Weight(Kg)	858		Scale	1:20	

This drawing contains confidential information and is the property of NIHVA TECH. Without whose permission it may not be copied, shown or handed to a third party or otherwise used

Description	DOCK LEVELER 2000x2500x600- DOUBLE CYLINDER		Sheet
Dwg no.		Rev. 00	01 of 02