www.wmpacking.com



TELESCOPIC BELT CONVEYOR

Wangman Intelligent Equipment(Shanghai) Co., Ltd

INTRODUCTION

By using telescopic belt conveyors, loading and unloading processes are faster (customers can save 20- 30% of the average loading time). It increases the efficiency of corporate work procedures. Furthermore, the telescopic belt conveyor increases planning security, reduces idle times of trucks and the total shipping volume can be used more efficiently based on higher storability options.

Our Telescopic Belt Conveyor will integrate with your existing material handling infrastructure — providing a durable, versatile, effective solution to speed loading and unloading.











An Ideal Solution

When your facility integrates one of our telescopic belt conveyor into its operations, you will enjoy numerous benefits, including:

Productivity: Telescopic Belt Conveyor reduces loading and unloading time by reducing the number of operators and effort in these processes. The Telescopic Belt Conveyor accomplishes this through easy extension and retraction, intuitive operator controls, optimal ergonomics, and seamless integration with the existing permanent conveyor solution.

This means tasks that would normally involve multiple operators, extended walking time, and inefficient picking and packing, can now be completed quickly and safely with just an operator or two — depending on package sizes. This results in faster turnaround and higher fulfillment rates.

Safety: With its ergonomic design, our telescopic belt conveyor is easier for employees to use safely. It cuts down on the risk of repetitive stress injuries as well as strains and other exertion injuries by placing the loading or unloading point at an ergonomically favorable point for the operator. This ultimately leads to lower costs and less downtime.

Less idle time: Without an extendable conveyor solution, much time is spent walking or forklifting packages and boxes from the permanent conveyor end to the dock (or vice versa), and additional time moving items to (or from) the innermost areas of the container. This additional handling time is considered idle time — since it is not actively contributing to the completion of the process. An extendable conveyor eliminates this wasted time by bringing the conveyor right to the loading or unloading point within the trailer.


These advantages make our equipment the perfect choice for a wide range of industrial and commercial environments. Virtually any industry with heavy shipping and receiving needs can reap significant rewards from implementing a telescopic belt conveyor solution, including e-commerce fulfillment, distribution centers, parcel handling and trucking terminals.

Customized for Your Needs

With a variety of lengths, widths, options and accessories, our telescopic belt conveyor will help achieve all of your material handling goals. We stand committed to engineering the solutions you need for your specific loading or unloading requirements. As part of that commitment, we also provide a wide range of accessories and options.


We supply solutions to meet all of your shipping requirements. To learn more about our offering or to start working with us, contact us today.

Fixed Telescopic Belt Conveyor

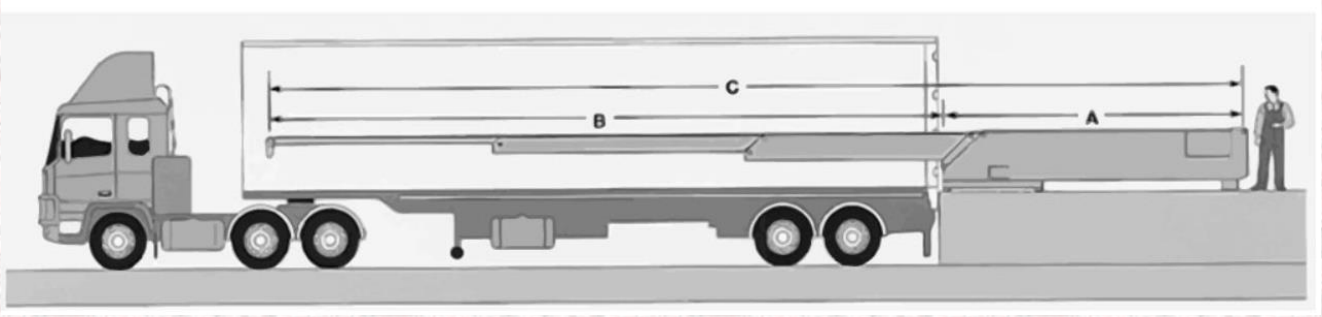

No.	Section	Fixed Length(A)	Extended Length(B)	Total Length(C)	Belt Width
1	2	4m	3m	7m	600/800mm
2	3	5m	7m	12m	600/800mm
3	3	5.4m	6.6m	12m	600/800mm
4	3	6m	8.6m	14.6m	600/800mm
5	4	5m	10m	15m	600/800mm
6	4	6m	12.6m	18.6m	600/800mm
7	4	7m	14.6m	21.6m	600/800mm
8	4	7.5m	16m	23.5m	600/800mm
9	5	6m	16m	22m	600/800mm
10	5	7m	19m	26m	600/800mm
11	5	7.5m	21m	28.5m	600/800mm
12	6	6m	20m	26m	600/800mm

Movable Telescopic Belt Conveyor

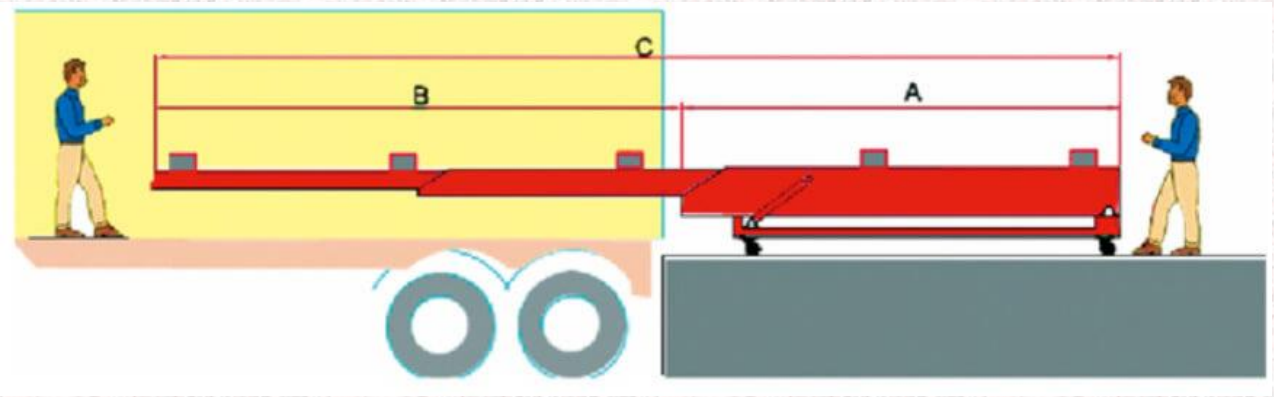

No.	Section	Fixed Length(A)	Extended Length(B)	Total Length(C)	Belt Width
1	2	4m	3m	7m	600/800mm
2	3	5m	7m	12m	600/800mm
3	3	5.4m	6.6m	12m	600/800mm
4	3	6m	8.6m	14.6m	600/800mm
5	3	4m	5m	9m	600/800mm
6	3	9.5m	12m	21.5m	600/800mm
7	4	5m	10m	15m	600/800mm
8	4	6m	12.6m	18.6m	600/800mm
9	4	7m	14.6m	21.6m	600/800mm
10	4	6m	12.6m	18.6m	600/800mm
11	4	7.5m	16m	23.5m	600/800mm

Specification

Belt		
Material		High Quality PVK
Thickness		3mm
Grade		Industry Grade
Color		Black
Max Loading Weight		80kg/m2
Belt Driven Motor		
Brand		SEW/Nord
Input Voltage		3-P 220V, 60HZ
Power		≥2.2KW
Telescopic Motor		
Brand		SEW/Nord
Input Voltage		3-P 220V, 60HZ
Power		≥0.75KW
Chain Wheel		
Belt Driven Chain Wheel	Speed Rate	1:1
	Speed	10~40m/min
Telescopic Driven Chain Wheel	Speed Rate	1:1
	Speed	10m/min
Site Environment		
Temperature		-20~50 degrees
Humidity		35%~85% rH

Specification

Main Components	
Frequency Converter	Schneider/Delta
Transformer	Delixi
Hase Sequence	Schneider
Thermal Relay	Schneider
Switch	Schneider
Button	Schneider
Joystick	Industry Grade
Sensor	Sick
Structure	
Frame	Special Steel, Thk 6.0mm
Support	Special Steel, Thk 3.0mm
Beam	50*100*4mm Hollow Section
Main Roller	OD 150mm Seamless Pipe, Thk≥6mm
Driven Roller	OD 108mm, OD80mm Seamless Pipe, Thk≥5mm
Hydraulic System	
Hydraulic Power Unit	220V, 0.75KW
Hydraulic Cylinder	Diameter 63mm, 16MPa, 2pcs/set
Stroke	300mm



Contact Us

Wangman Intelligent Equipment(Shanghai) Co, Ltd

Mob& WhatsApp& Wechat& Facebook& Manager:
0086 18524145561
Email:
tiffany@wmpacking.com
Website:
http://www.wmpacking.com/en/
Alibaba Website:
https://wmpacking.en.alibaba.com/
YouTube:
https://www.youtube.com/channel/UCtGppQNaLIhMy-aRnWI5wdw?view_as=subscriber
Add:
No. 600 Xinzhai Road, Tianma Industrial District, Shanghai City, China