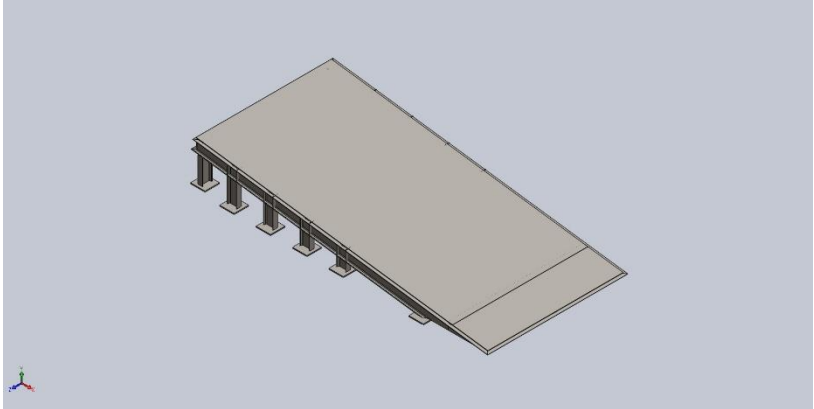


Simulation of 1Assem1

Date: 02 APRIL 2026
Designer: BHARATI SABALE
Study name: Static 2
Analysis type: Static

Table of Contents

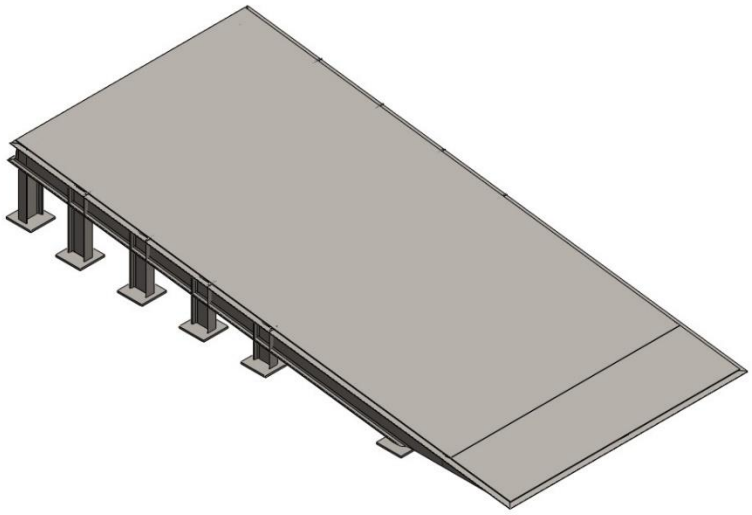
Description 1
Assumptions 2
Model Information 3
Study Properties 10
Units 11
Material Properties 12
Loads and Fixtures 14
Connector Definitions 14
Interaction Information 15
Mesh information 15
Sensor Details 15
Resultant Forces 16
Beams 17
Study Results 20
Conclusion 21

Description

No Data

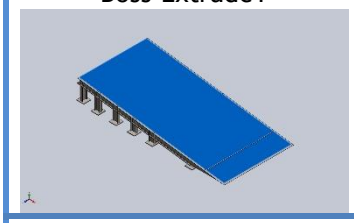
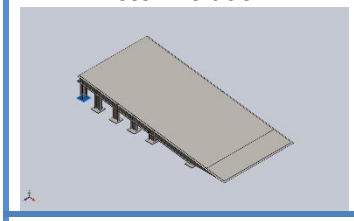
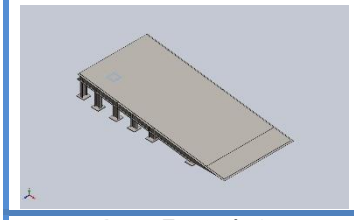
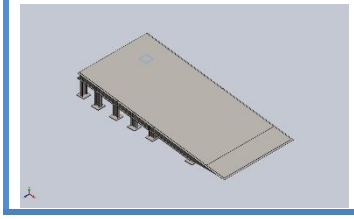
Assumptions

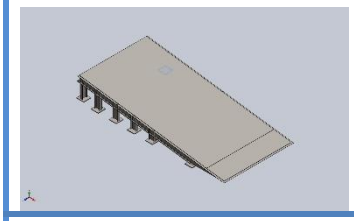
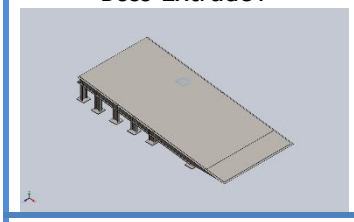

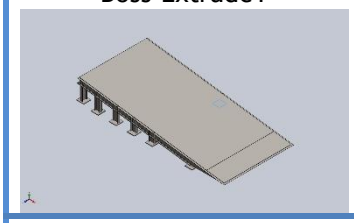
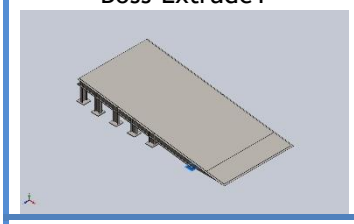
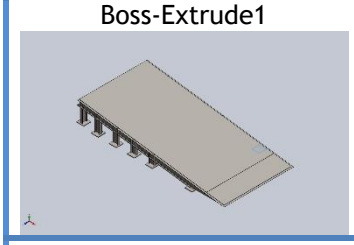

Model Information

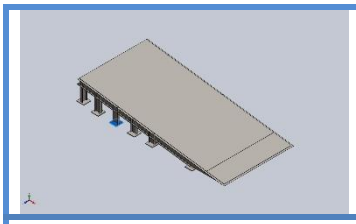
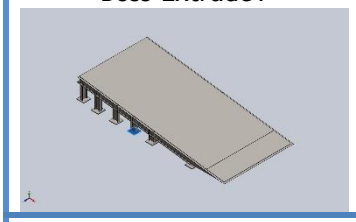
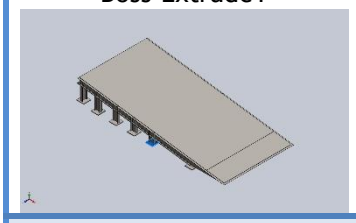


Model name: 1Assem1
Current Configuration: Default




Solid Bodies

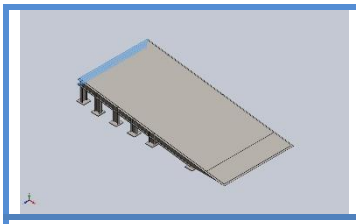





Document Name and Reference	Treated As	Volumetric Properties	Document Path/Date Modified
Boss-Extrude1 	Solid Body	**Mass:167.323 kg** **Volume:0.021315 m^3** **Density:7,850 kg/m^3** **Weight:1,639.76 N**	**C:\Users\Design\Desktop\dock ramp 1\1CHEQURED PLATE.SLDPRT** Oct 17 12:02:27 2025
Boss-Extrude1 	Solid Body	**Mass:1.76625 kg** **Volume:0.000225 m^3** **Density:7,850 kg/m^3** **Weight:17.3093 N**	**C:\Users\Design\Desktop\dock ramp 1\1bottom plate.SLDPRT** Oct 17 04:49:50 2025
Boss-Extrude1 	Solid Body	**Mass:1.76625 kg** **Volume:0.000225 m^3** **Density:7,850 kg/m^3** **Weight:17.3093 N**	**C:\Users\Design\Desktop\dock ramp 1\1bottom plate.SLDPRT** Oct 17 04:49:50 2025
Boss-Extrude1 	Solid Body	**Mass:1.76625 kg** **Volume:0.000225 m^3** **Density:7,850 kg/m^3** **Weight:17.3093 N**	**C:\Users\Design\Desktop\dock ramp 1\1bottom plate.SLDPRT** Oct 17 04:49:50 2025






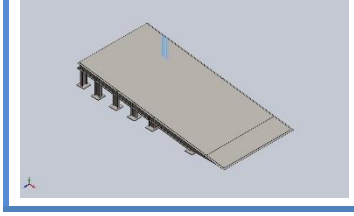
Boss-Extrude1 	Solid Body	**Mass:1.76625 kg** **Volume:0.000225 m^3** **Density:7,850 kg/m^3** **Weight:17.3093 N**	**C:\Users\Design\Desktop\dock ramp 1\1bottom plate.SLDPRT** Oct 17 04:49:50 2025
Boss-Extrude1 	Solid Body	**Mass:1.76625 kg** **Volume:0.000225 m^3** **Density:7,850 kg/m^3** **Weight:17.3093 N**	**C:\Users\Design\Desktop\dock ramp 1\1bottom plate.SLDPRT** Oct 17 04:49:50 2025
Boss-Extrude1 	Solid Body	**Mass:1.76625 kg** **Volume:0.000225 m^3** **Density:7,850 kg/m^3** **Weight:17.3093 N**	**C:\Users\Design\Desktop\dock ramp 1\1bottom plate.SLDPRT** Oct 17 04:49:50 2025
Boss-Extrude1 	Solid Body	**Mass:1.76625 kg** **Volume:0.000225 m^3** **Density:7,850 kg/m^3** **Weight:17.3092 N**	**C:\Users\Design\Desktop\dock ramp 1\1bottom plate.SLDPRT** Oct 17 04:49:50 2025
Boss-Extrude1 	Solid Body	**Mass:1.76625 kg** **Volume:0.000225 m^3** **Density:7,850 kg/m^3** **Weight:17.3093 N**	**C:\Users\Design\Desktop\dock ramp 1\1bottom plate.SLDPRT** Oct 17 04:49:50 2025
Boss-Extrude1 	Solid Body	**Mass:1.76625 kg** **Volume:0.000225 m^3** **Density:7,850 kg/m^3** **Weight:17.3093 N**	**C:\Users\Design\Desktop\dock ramp 1\1bottom plate.SLDPRT** Oct 17 04:49:50 2025
Boss-Extrude1 	Solid Body	**Mass:1.76625 kg** **Volume:0.000225 m^3** **Density:7,850 kg/m^3** **Weight:17.3093 N**	**C:\Users\Design\Desktop\dock ramp 1\1bottom plate.SLDPRT** Oct 17 04:49:50 2025
Boss-Extrude1	Solid Body	**Mass:1.76625 kg** **Volume:0.000225 m^3** **Density:7,850 kg/m^3** **Weight:17.3093 N**	**C:\Users\Design\Desktop\dock ramp 1\1bottom plate.SLDPRT** Oct 17 04:49:50 2025






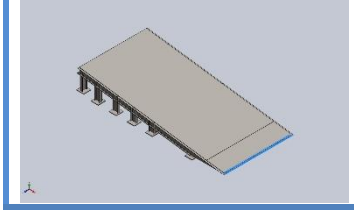
			
Boss-Extrude1 	Solid Body	**Mass:1.76625 kg Volume:0.000225 m^3 Density:7,850 kg/m^3 Weight:17.3093 N**	**C:\Users\Design\Desktop\dock ramp 1\1bottom plate.SLDPRT** Oct 17 04:49:50 2025
Boss-Extrude1 	Solid Body	**Mass:1.76625 kg Volume:0.000225 m^3 Density:7,850 kg/m^3 Weight:17.3092 N**	**C:\Users\Design\Desktop\dock ramp 1\1bottom plate.SLDPRT** Oct 17 04:49:50 2025



Beam Bodies:

Document Name and Reference	Formulation	Properties	Document Path/Date Modified
SolidBody 1(Sb beam 100 X 8(37)[3]) 	Beam - Uniform C/S	**Section Standard-weldment profiles/iso/sb beam Section Area: 0.00109003m^2 Length:248.074mm Volume:0.000270408m^3 Mass Density:7,850kg/m^3 Mass:2.1227kg Weight:20.8025N**	**C:\Users\Design\Desktop\dock ramp 1\1sissior lift ramp.SLDPRT** Oct 17 19:22:04 2025
SolidBody 2(Sb beam 100 X 8(37)[8]) 	Beam - Uniform C/S	**Section Standard-weldment profiles/iso/sb beam Section Area: 0.00109003m^2 Length:198.098mm Volume:0.000215933m^3 Mass Density:7,850kg/m^3 Mass:1.69508kg Weight:16.6117N**	**C:\Users\Design\Desktop\dock ramp 1\1sissior lift ramp.SLDPRT** Oct 17 19:22:04 2025
SolidBody 3(Trim/Extend7[3]) 	Beam - Uniform C/S	**Section Standard-weldment profiles/iso/c channel Section Area: 0.00131018m^2 Length:1,373.39mm Volume:0.00177894m^3 Mass Density:7,850kg/m^3 Mass:13.9646kg Weight:136.853N**	**C:\Users\Design\Desktop\dock ramp 1\1sissior lift ramp.SLDPRT** Oct 17 19:22:04 2025
SolidBody 4(Trim/Extend2[2])	Beam - Uniform C/S	**Section Standard- Section Area: 0.00109003m^2**	**C:\Users\Design\Desktop\dock ramp 1\1sissior lift ramp.SLDPRT**

		**Length:1,400mm Volume:0.00152612m^3 Mass Density:7,850kg/m^3 Mass:11.9801kg Weight:117.405N**	Oct 17 19:22:04 2025
SolidBody 5(Sb beam 100 X 8(12)) 	Beam - Uniform C/S	**Section Standard-weldment profiles/iso/sb beam Section Area: 0.00109003m^2 Length:398mm Volume:0.000433832m^3 Mass Density:7,850kg/m^3 Mass:3.40558kg Weight:33.3747N**	**C:\Users\Design\Desktop\dock ramp 1\1sissior lift ramp.SLDPRT** Oct 17 19:22:04 2025
SolidBody 6(Sb beam 100 X 8(37)[6]) 	Beam - Uniform C/S	**Section Standard-weldment profiles/iso/sb beam Section Area: 0.00109003m^2 Length:298.049mm Volume:0.000324883m^3 Mass Density:7,850kg/m^3 Mass:2.55033kg Weight:24.9932N**	**C:\Users\Design\Desktop\dock ramp 1\1sissior lift ramp.SLDPRT** Oct 17 19:22:04 2025
SolidBody 7(Sb beam 100 X 8(37)[1]) 	Beam - Uniform C/S	**Section Standard-weldment profiles/iso/sb beam Section Area: 0.00109003m^2 Length:348.025mm Volume:0.000379358m^3 Mass Density:7,850kg/m^3 Mass:2.97796kg Weight:29.184N**	**C:\Users\Design\Desktop\dock ramp 1\1sissior lift ramp.SLDPRT** Oct 17 19:22:04 2025
SolidBody 8(Trim/Extend7[4]) 	Beam - Uniform C/S	**Section Standard-weldment profiles/iso/c channel Section Area: 0.00131018m^2 Length:1,373.39mm Volume:0.00177894m^3 Mass Density:7,850kg/m^3 Mass:13.9646kg Weight:136.853N**	**C:\Users\Design\Desktop\dock ramp 1\1sissior lift ramp.SLDPRT** Oct 17 19:22:04 2025
SolidBody 9(Sb beam 100 X 8(37)[4]) 	Beam - Uniform C/S	**Section Standard-weldment profiles/iso/sb beam Section Area: 0.00109003m^2 Length:198.098mm Volume:0.000215933m^3 Mass Density:7,850kg/m^3 Mass:1.69508kg Weight:16.6117N**	**C:\Users\Design\Desktop\dock ramp 1\1sissior lift ramp.SLDPRT** Oct 17 19:22:04 2025

SolidBody 10(Sb beam 100 X 8(13)) 	Beam - Uniform C/S	**Section Standard-weldment profiles/iso/sb beam Section Area: 0.00109003m^2 Length:398mm Volume:0.000433832m^3 Mass Density:7,850kg/m^3 Mass:3.40558kg Weight:33.3747N**	**C:\Users\Design\Desktop\dock ramp 1\1sissior lift ramp.SLDPRT** Oct 17 19:22:04 2025
SolidBody 11(Trim/Extend7[1]) 	Beam - Uniform C/S	**Section Standard-weldment profiles/iso/c channel Section Area: 0.00131018m^2 Length:1,373.39mm Volume:0.00177894m^3 Mass Density:7,850kg/m^3 Mass:13.9646kg Weight:136.853N**	**C:\Users\Design\Desktop\dock ramp 1\1sissior lift ramp.SLDPRT** Oct 17 19:22:04 2025
SolidBody 12(Sb beam 100 X 8(37)[7]) 	Beam - Uniform C/S	**Section Standard-weldment profiles/iso/sb beam Section Area: 0.00109003m^2 Length:248.074mm Volume:0.000270408m^3 Mass Density:7,850kg/m^3 Mass:2.1227kg Weight:20.8025N**	**C:\Users\Design\Desktop\dock ramp 1\1sissior lift ramp.SLDPRT** Oct 17 19:22:04 2025
SolidBody 13(Trim/Extend7[5]) 	Beam - Uniform C/S	**Section Standard-weldment profiles/iso/c channel Section Area: 0.00131018m^2 Length:1,373.39mm Volume:0.00177894m^3 Mass Density:7,850kg/m^3 Mass:13.9646kg Weight:136.853N**	**C:\Users\Design\Desktop\dock ramp 1\1sissior lift ramp.SLDPRT** Oct 17 19:22:04 2025
SolidBody 14(Sb beam 100 X 8(37)[2]) 	Beam - Uniform C/S	**Section Standard-weldment profiles/iso/sb beam Section Area: 0.00109003m^2 Length:298.049mm Volume:0.000324883m^3 Mass Density:7,850kg/m^3 Mass:2.55033kg Weight:24.9932N**	**C:\Users\Design\Desktop\dock ramp 1\1sissior lift ramp.SLDPRT** Oct 17 19:22:04 2025
SolidBody 15(Sb beam 100 X 8(37)[5]) 	Beam - Uniform C/S	**Section Standard-weldment profiles/iso/sb beam Section Area: 0.00109003m^2 Length:348.025mm Volume:0.000379358m^3 Mass Density:7,850kg/m^3 Mass:2.97796kg Weight:29.184N**	**C:\Users\Design\Desktop\dock ramp 1\1sissior lift ramp.SLDPRT** Oct 17 19:22:04 2025

SolidBody 16(Trim/Extend7[2]) 	Beam - Uniform C/S	**Section Standard-weldment profiles/iso/c channel Section Area: 0.00131018m^2 Length:1,373.39mm Volume:0.00177894m^3 Mass Density:7,850kg/m^3 Mass:13.9646kg Weight:136.853N**	**C:\Users\Design\Desktop\dock ramp 1\1sissior lift ramp.SLDPRT** Oct 17 19:22:04 2025
SolidBody 17(Sb beam 100 X 8(14)) 	Beam - Uniform C/S	**Section Standard-weldment profiles/iso/sb beam Section Area: 0.00109003m^2 Length:398mm Volume:0.000433832m^3 Mass Density:7,850kg/m^3 Mass:3.40558kg Weight:33.3747N**	**C:\Users\Design\Desktop\dock ramp 1\1sissior lift ramp.SLDPRT** Oct 17 19:22:04 2025
SolidBody 18(Trim/Extend7[6]) 	Beam - Uniform C/S	**Section Standard-weldment profiles/iso/c channel Section Area: 0.00131018m^2 Length:1,373.39mm Volume:0.00177894m^3 Mass Density:7,850kg/m^3 Mass:13.9646kg Weight:136.853N**	**C:\Users\Design\Desktop\dock ramp 1\1sissior lift ramp.SLDPRT** Oct 17 19:22:04 2025
SolidBody 19(Trim/Extend6) 	Beam - Uniform C/S	**Section Standard- Section Area: 0.00109003m^2 Length:3,023.75mm Volume:0.00295323m^3 Mass Density:7,850kg/m^3 Mass:23.1829kg Weight:227.192N**	**C:\Users\Design\Desktop\dock ramp 1\1sissior lift ramp.SLDPRT** Oct 17 19:22:04 2025
SolidBody 20(Trim/Extend3[1]) 	Beam - Uniform C/S	**Section Standard-weldment profiles/iso/sb beam Section Area: 0.00109003m^2 Length:3,013.09mm Volume:0.00295487m^3 Mass Density:7,850kg/m^3 Mass:23.1957kg Weight:227.318N**	**C:\Users\Design\Desktop\dock ramp 1\1sissior lift ramp.SLDPRT** Oct 17 19:22:04 2025
SolidBody 21(Trim/Extend4[2]) 	Beam - Uniform C/S	**Section Standard- Section Area: 0.000360729m^2 Length:1,403.59mm Volume:0.000506317m^3 Mass Density:7,850kg/m^3 Mass:3.97459kg Weight:38.951N**	**C:\Users\Design\Desktop\dock ramp 1\1sissior lift ramp.SLDPRT** Oct 17 19:22:04 2025

SolidBody 22(C channel 100 X 10(1)[7]) 	Beam - Uniform C/S	**Section Standard-weldment profiles/iso/c channel Section Area: 0.000773088m^2 Length:1,400mm Volume:0.00108232m^3 Mass Density:7,850kg/m^3 Mass:8.49624kg Weight:83.2631N**	**C:\Users\Design\Desktop\dock ramp 1\1sissior lift ramp.SLDPRT** Oct 17 19:22:04 2025
SolidBody 23(Trim/Extend4[1]) 	Beam - Uniform C/S	**Section Standard-weldment profiles/iso/sb beam Section Area: 0.00109003m^2 Length:3,010.75mm Volume:0.00295487m^3 Mass Density:7,850kg/m^3 Mass:23.1957kg Weight:227.318N**	**C:\Users\Design\Desktop\dock ramp 1\1sissior lift ramp.SLDPRT** Oct 17 19:22:04 2025

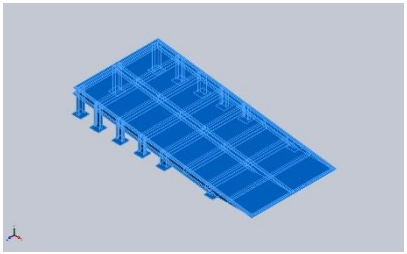
Study Properties

Study name	Static 2
Analysis type	Static
Mesh type	Mixed Mesh
Thermal Effect:	On
Thermal option	Include temperature loads
Zero strain temperature	298 Kelvin
Include fluid pressure effects from SOLIDWORKS Flow Simulation	Off
Solver type	Automatic
Inplane Effect:	Off
Soft Spring:	Off
Inertial Relief:	Off
Incompatible bonding options	Automatic
Large displacement	Off
Compute free body forces	On
Friction	Off
Use Adaptive Method:	Off
Result folder	SOLIDWORKS document (C:\Users\Design\Desktop\dock ramp 1)

Units

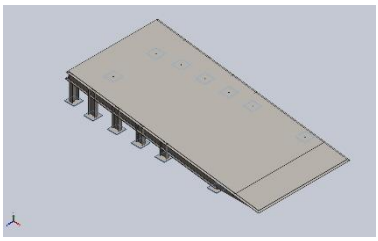
Unit system:	SI (MKS)
Length/Displacement	mm
Temperature	Kelvin
Angular velocity	Rad/sec
Pressure/Stress	N/m^2

Material Properties

Model Reference	Properties	Components
	**Name:** AISI 4340 Steel, normalized **Model type:** Linear Elastic Isotropic **Default failure criterion:** Max von Mises Stress **Yield strength:** 7.1e+08 N/m^2 **Tensile strength:** 1.11e+09 N/m^2 **Elastic modulus:** 2.05e+11 N/m^2 **Poisson's ratio:** 0.32 **Mass density:** 7,850 kg/m^3 **Shear modulus:** 8e+10 N/m^2 **Thermal expansion coefficient:** 1.23e-05 /Kelvin	SolidBody 1(Boss-Extrude1)(1CHEQURED PLATE-1), SolidBody 1(Boss-Extrude1)(1bottom plate-1), SolidBody 1(Boss-Extrude1)(1bottom plate-13), SolidBody 1(Boss-Extrude1)(1bottom plate-15), SolidBody 1(Boss-Extrude1)(1bottom plate-17), SolidBody 1(Boss-Extrude1)(1bottom plate-19), SolidBody 1(Boss-Extrude1)(1bottom plate-21), SolidBody 1(Boss-Extrude1)(1bottom plate-23), SolidBody 1(Boss-Extrude1)(1bottom plate-24), SolidBody 1(Boss-Extrude1)(1bottom plate-25), SolidBody 1(Boss-Extrude1)(1bottom plate-3), SolidBody 1(Boss-Extrude1)(1bottom plate-5), SolidBody 1(Boss-Extrude1)(1bottom plate-7), SolidBody 1(Boss-Extrude1)(1bottom plate-9), SolidBody 1(Sb beam 100 X 8(37)[3])(1sissior lift ramp-1), SolidBody 2(Sb beam 100 X 8(37)[8])(1sissior lift ramp-1), SolidBody 3(Trim/Extend7[3])(1sissior lift ramp-1), SolidBody 4(Trim/Extend2[2])(1sissior lift ramp-1), SolidBody 5(Sb beam 100 X 8(12))(1sissior lift ramp-1), SolidBody 6(Sb beam 100 X 8(37)[6])(1sissior lift ramp-1), SolidBody 7(Sb beam 100 X 8(37)[1])(1sissior lift ramp-1), SolidBody 8(Trim/Extend7[4])(1sissior lift ramp-1), SolidBody 9(Sb beam 100 X 8(37)[4])(1sissior lift ramp-1),

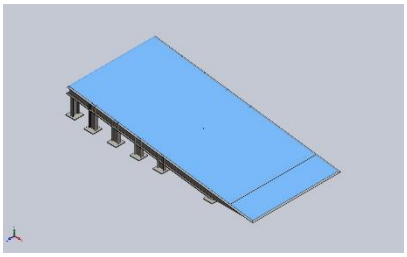
		SolidBody 10(Sb beam 100 X 8(13))(1sissior lift ramp-1), SolidBody 11(Trim/Extend7[1])(1sissior lift ramp-1), SolidBody 12(Sb beam 100 X 8(37)[7])(1sissior lift ramp-1), SolidBody 13(Trim/Extend7[5])(1sissior lift ramp-1), SolidBody 14(Sb beam 100 X 8(37)[2])(1sissior lift ramp-1), SolidBody 15(Sb beam 100 X 8(37)[5])(1sissior lift ramp-1), SolidBody 16(Trim/Extend7[2])(1sissior lift ramp-1), SolidBody 17(Sb beam 100 X 8(14))(1sissior lift ramp-1), SolidBody 18(Trim/Extend7[6])(1sissior lift ramp-1), SolidBody 19(Trim/Extend6)(1sissior lift ramp-1), SolidBody 20(Trim/Extend3[1])(1sissior lift ramp-1), SolidBody 21(Trim/Extend4[2])(1sissior lift ramp-1), SolidBody 22(C channel 100 X 10(1)[7])(1sissior lift ramp-1), SolidBody 23(Trim/Extend4[1])(1sissior lift ramp-1)
Curve Data:N/A		

Loads and Fixtures

Fixture name	Fixture Image	Fixture Details
Fixed-1		**Entities:** 13 face(s) **Type:** Fixed Geometry

Resultant Forces

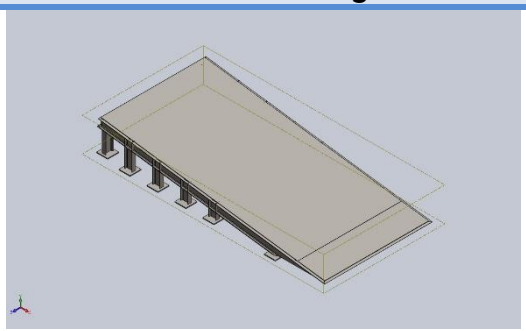
Components	X	Y	Z	Resultant
Reaction force(N)	0	0	0	1e-33
Reaction Moment(N.m)	0	0	0	1e-33

Load name	Load Image	Load Details
Force-1		**Entities:** 1 face(s) **Type:** Apply normal force **Value:** 2,500 N

Connector Definitions

No Data

Interaction Information

Interaction	Interaction Image	Interaction Properties
Global Interaction		**Type:** Bonded **Components:** 1 component(s) **Options:** Independent mesh

Mesh information

Mesh type	Mixed Mesh
Mesher Used:	Blended curvature-based mesh
Jacobian points for High quality mesh	16 Points
Jacobian check for shell	Off
Maximum element size	60.7732 mm
Minimum element size	60.7732 mm
Mesh Quality	High
Remesh failed parts independently	Off

Mesh information - Details

Total Nodes	18972
Total Elements	9238
Time to complete mesh(hh;mm;ss):	00:00:11
Computer name:	

Sensor Details

No Data

Resultant Forces

Reaction forces

Selection set	Units	Sum X	Sum Y	Sum Z	Resultant
Entire Model	N	0	0	0	1e-33

Reaction Moments

Selection set	Units	Sum X	Sum Y	Sum Z	Resultant
Entire Model	N.m	0	0	0	1e-33

Free body forces

Selection set	Units	Sum X	Sum Y	Sum Z	Resultant
Entire Model	N	286.652	68,610.8	-1,190.86	68,621.7

Free body moments

Selection set	Units	Sum X	Sum Y	Sum Z	Resultant
Entire Model	N.m	0	0	0	1e-33

Beams

Beam Forces

Beam Name	Joints	Axial(N)	Shear1(N)	Shear2(N)	Moment1(N.m)	Moment2(N.m)	Torque(N.m)
Beam-1(Sb beam 100 X 8(37)[3])	1	0	0	0	0	0	0
	2	0	0	0	0	0	0
Beam-2(Sb beam 100 X 8(37)[8])	1	0	0	0	0	0	0
	2	0	0	0	0	0	0
Beam-3(Trim/Extend7[3])	1	0	0	0	0	0	0
	2	0	0	0	0	0	0
	3	0	0	0	0	0	0
Beam-4(Trim/Extend2[2])	1	0	0	0	0	0	0
	2	0	0	0	0	0	0
	3	0	0	0	0	0	0
Beam-5(Sb beam 100 X 8(12))	1	0	0	0	0	0	0
	2	0	0	0	0	0	0
Beam-6(Sb beam 100 X 8(37)[6])	1	0	0	0	0	0	0
	2	0	0	0	0	0	0
Beam-7(Sb beam 100 X 8(37)[1])	1	0	0	0	0	0	0
	2	0	0	0	0	0	0
Beam-8(Trim/Extend7[4])	1	0	0	0	0	0	0
	2	0	0	0	0	0	0
	3	0	0	0	0	0	0
Beam-9(Sb beam 100 X 8(37)[4])	1	0	0	0	0	0	0
	2	0	0	0	0	0	0
Beam-10(Sb beam 100 X 8(13))	1	0	0	0	0	0	0
	2	0	0	0	0	0	0
Beam-11(Trim/Extend7[1])	1	0	0	0	0	0	0
	2	0	0	0	0	0	0
	3	0	0	0	0	0	0
Beam-12(Sb beam 100 X 8(37)[7])	1	0	0	0	0	0	0
	2	0	0	0	0	0	0
Beam-13(Trim/Extend7[5])	1	0	0	0	0	0	0
	2	0	0	0	0	0	0
	3	0	0	0	0	0	0
Beam-14(Sb beam 100 X 8(37)[2])	1	0	0	0	0	0	0
	2	0	0	0	0	0	0
Beam-15(Sb beam 100 X 8(37)[5])	1	0	0	0	0	0	0
	2	0	0	0	0	0	0
Beam-16(Trim/Extend7[2])	1	0	0	0	0	0	0
	2	0	0	0	0	0	0
	3	0	0	0	0	0	0
Beam-17(Sb beam 100 X 8(14))	1	0	0	0	0	0	0
	2	0	0	0	0	0	0
Beam-18(Trim/Extend7[6])	1	0	0	0	0	0	0
	2	0	0	0	0	0	0
	3	0	0	0	0	0	0
Beam-19(Trim/Extend6)	1	0	0	0	0	0	0
	2	0	0	0	0	0	0
	3	0	0	0	0	0	0
	4	0	0	0	0	0	0
	5	0	0	0	0	0	0

	6	0	0	0	0	0	0
	7	0	0	0	0	0	0
	8	0	0	0	0	0	0
	9	0	0	0	0	0	0
Beam-20(Trim/Extend3[1])	1	0	0	0	0	0	0
	2	0	0	0	0	0	0
	3	0	0	0	0	0	0
	4	0	0	0	0	0	0
	5	0	0	0	0	0	0
	6	0	0	0	0	0	0
	7	0	0	0	0	0	0
	8	0	0	0	0	0	0
	9	0	0	0	0	0	0
Beam-21(Trim/Extend4[2])	1	0	0	0	0	0	0
	2	0	0	0	0	0	0
	3	0	0	0	0	0	0
Beam-22(C channel 100 X 10(1)[7])	1	0	0	0	0	0	0
	2	0	0	0	0	0	0
	3	0	0	0	0	0	0
Beam-23(Trim/Extend4[1])	1	0	0	0	0	0	0
	2	0	0	0	0	0	0
	3	0	0	0	0	0	0
	4	0	0	0	0	0	0
	5	0	0	0	0	0	0
	6	0	0	0	0	0	0
	7	0	0	0	0	0	0
	8	0	0	0	0	0	0
	9	0	0	0	0	0	0

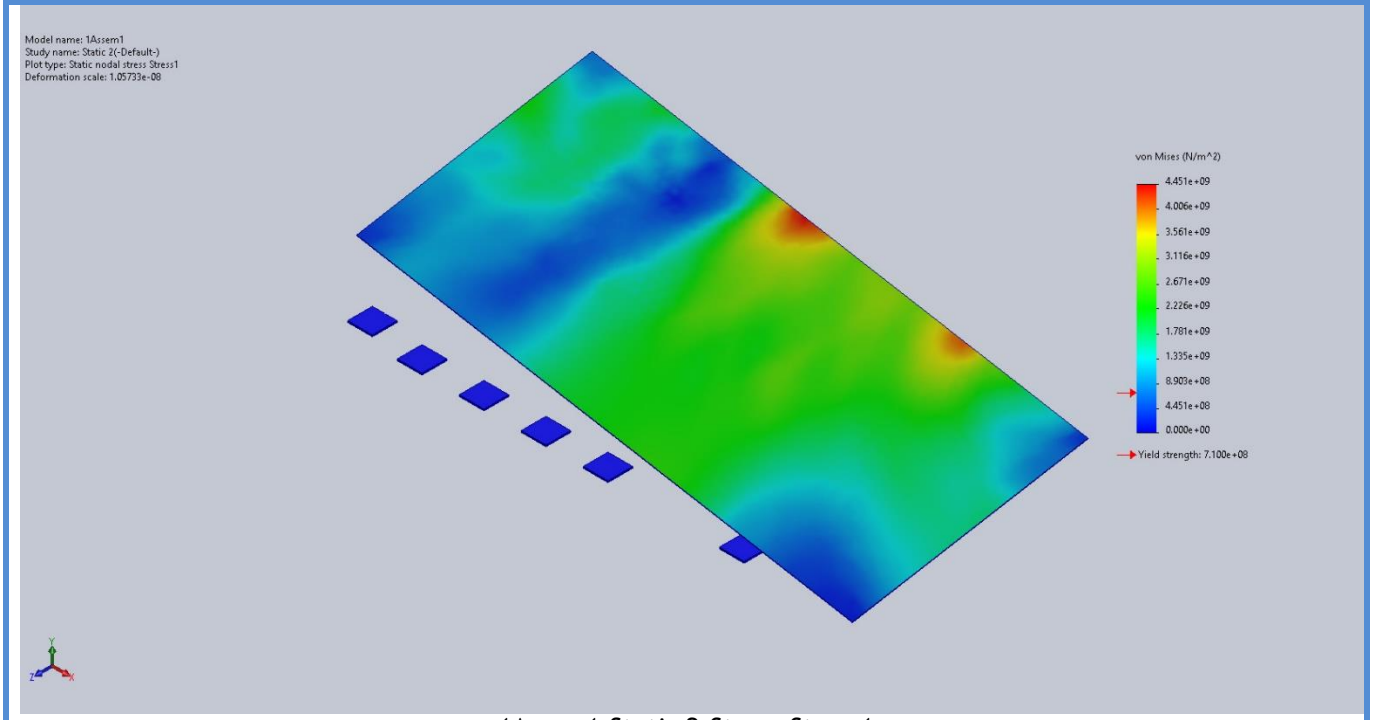
Beam Stresses

Beam Name	Joints	Axial(N/m^2)	Bending Dir1(N/m^2)	Bending Dir2(N/m^2)	Torsional (N/m^2)	Upper bound axial and bending(N/m^2)
Beam-1(Sb beam 100 X 8(37)[3])	1	0	0	0	0	0
	2	0	0	0	0	0
Beam-2(Sb beam 100 X 8(37)[8])	1	0	0	0	0	0
	2	0	0	0	0	0
Beam-3(Trim/Extend7[3])	1	0	0	0	0	0
	2	0	0	0	0	0
	3	0	0	0	0	0
Beam-4(Trim/Extend2[2])	1	0	0	0	0	0
	2	0	0	0	0	0
	3	0	0	0	0	0
Beam-5(Sb beam 100 X 8(12))	1	0	0	0	0	0
	2	0	0	0	0	0
Beam-6(Sb beam 100 X 8(37)[6])	1	0	0	0	0	0
	2	0	0	0	0	0
Beam-7(Sb beam 100 X 8(37)[1])	1	0	0	0	0	0
	2	0	0	0	0	0
Beam-8(Trim/Extend7[4])	1	0	0	0	0	0
	2	0	0	0	0	0
	3	0	0	0	0	0
Beam-9(Sb beam 100 X 8(37)[4])	1	0	0	0	0	0
	2	0	0	0	0	0

Beam-10(Sb beam 100 X 8(13))	1	0	0	0	0	0
	2	0	0	0	0	0
Beam-11(Trim/Extend7[1])	1	0	0	0	0	0
	2	0	0	0	0	0
	3	0	0	0	0	0
Beam-12(Sb beam 100 X 8(37)[7])	1	0	0	0	0	0
	2	0	0	0	0	0
Beam-13(Trim/Extend7[5])	1	0	0	0	0	0
	2	0	0	0	0	0
	3	0	0	0	0	0
Beam-14(Sb beam 100 X 8(37)[2])	1	0	0	0	0	0
	2	0	0	0	0	0
Beam-15(Sb beam 100 X 8(37)[5])	1	0	0	0	0	0
	2	0	0	0	0	0
Beam-16(Trim/Extend7[2])	1	0	0	0	0	0
	2	0	0	0	0	0
	3	0	0	0	0	0
Beam-17(Sb beam 100 X 8(14))	1	0	0	0	0	0
	2	0	0	0	0	0
Beam-18(Trim/Extend7[6])	1	0	0	0	0	0
	2	0	0	0	0	0
	3	0	0	0	0	0
Beam-19(Trim/Extend6)	1	0	0	0	0	0
	2	0	0	0	0	0
	3	0	0	0	0	0
	4	0	0	0	0	0
	5	0	0	0	0	0
	6	0	0	0	0	0
	7	0	0	0	0	0
	8	0	0	0	0	0
	9	0	0	0	0	0
Beam-20(Trim/Extend3[1])	1	0	0	0	0	0
	2	0	0	0	0	0
	3	0	0	0	0	0
	4	0	0	0	0	0
	5	0	0	0	0	0
	6	0	0	0	0	0
	7	0	0	0	0	0
	8	0	0	0	0	0
	9	0	0	0	0	0
Beam-21(Trim/Extend4[2])	1	0	0	0	0	0
	2	0	0	0	0	0
	3	0	0	0	0	0
Beam-22(C channel 100 X 10(1)[7])	1	0	0	0	0	0
	2	0	0	0	0	0
	3	0	0	0	0	0
Beam-23(Trim/Extend4[1])	1	0	0	0	0	0
	2	0	0	0	0	0
	3	0	0	0	0	0
	4	0	0	0	0	0
	5	0	0	0	0	0
	6	0	0	0	0	0
	7	0	0	0	0	0
	8	0	0	0	0	0
	9	0	0	0	0	0

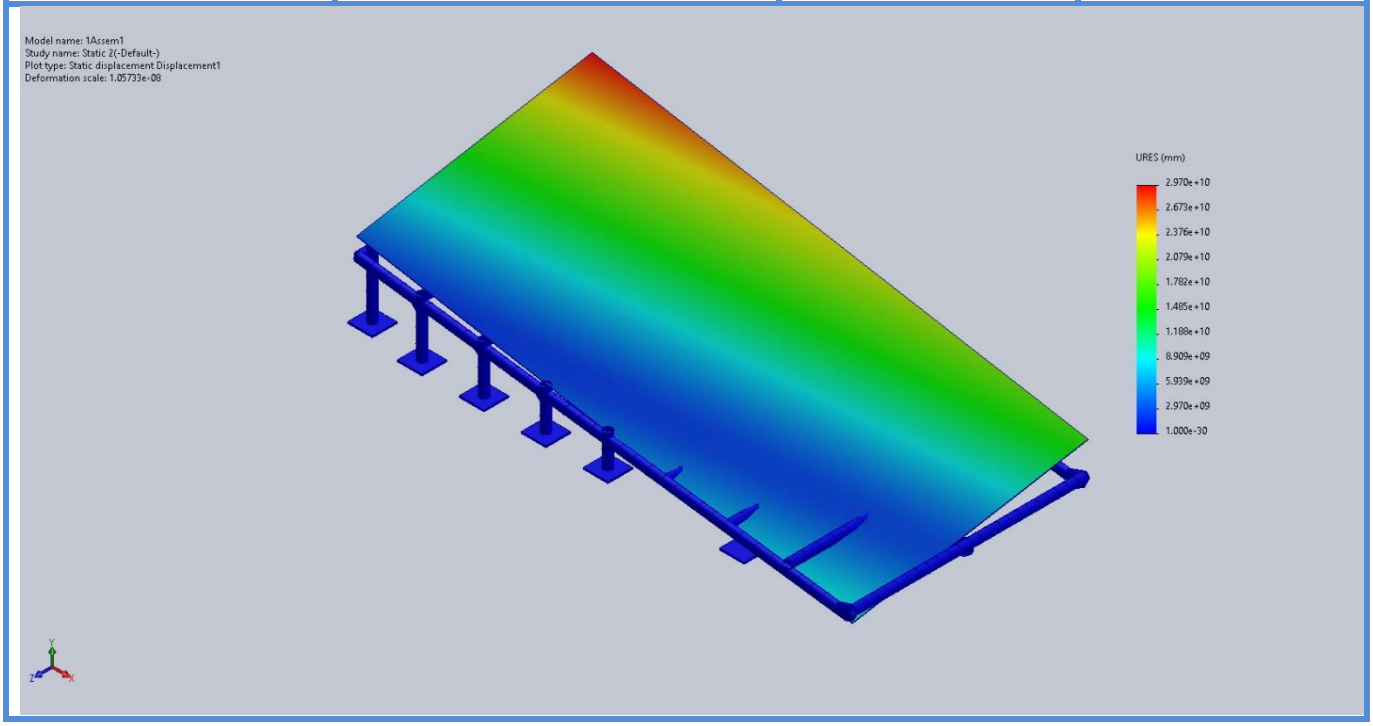
Study Results

Name	Type	Min	Max
Stress1	VON: von Mises Stress	0.000e+00N/m^2 Node: 16173	4.451e+09N/m^2 Node: 15106



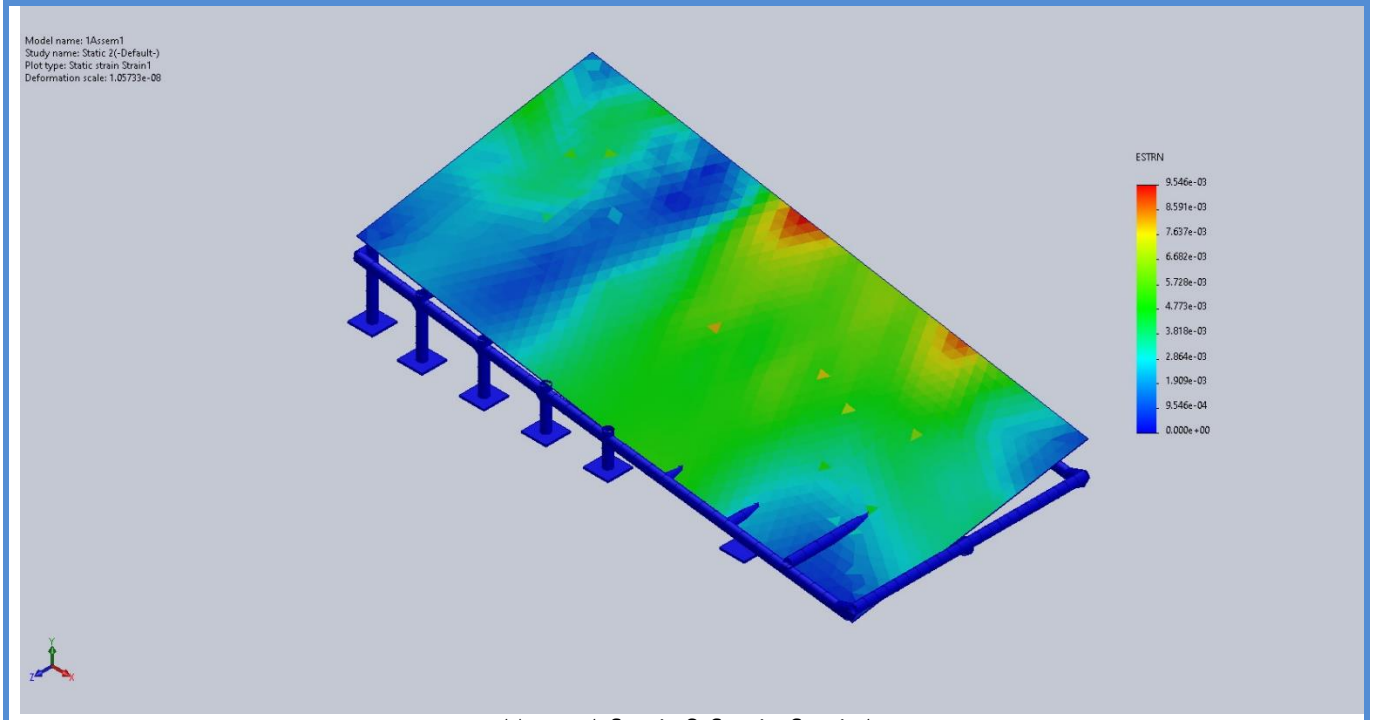
1Assem1-Static 2-Stress-Stress1

Name	Type	Min	Max
Displacement1	URES: Resultant Displacement	0.000e+00mm Node: 16173	2.970e+10mm Node: 4



1Assem1-Static 2-Displacement-Displacement1

Name	Type	Min	Max
Strain1	ESTRN: Equivalent Strain	0.000e+00 Element: 7896	9.546e-03 Element: 5130



1Assem1-Static 2-Strain-Strain1

Conclusion