
TTI GROUP SLIDING BEARINGS

TECHNYMON TECHNOLOGY (I) PVT LTD

Address: Gat no. 365/1 A & 1B, Chakan-Ambethan Road, Kharabwadi Chakan, Pune – 410501 Maharashtra, India.Tel: 02135-645374/71-5 Fax: 02135-251335 E-mail: quality@technymonindia.com

MU

MU is a composite multiple-layer material used in the manufacture of dry self-lubricating sliding bearings.
The main parts componing this product are a loaded PTFE-based sliding layer (without lead, complying with the European Parliament's "ELV" directive 2000/53/EC), a sintered tin bronze layer and a low carbon steel support. Thanks to its structure, MU provides an excellent match between the mechanical strength of steel and the low coefficient of friction due to the PTFE-based sliding layer.
The bronze layer guarantees a sound coupling for the self-lubricating mixture and allows a good loss of the heat produced during operation.
(Dimensional tables on pages 10 to 23).

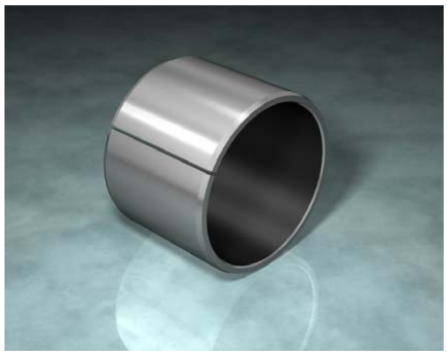

CHARACTERISTICS:

- High load capacity
- Dry self-lubrication
- Low friction factor, either static and dynamic (no stick-slip effect)
- Minimized wear and excellent service life
- High chemical inertia and good compatibility with fluids
- Wide range of working temperatures
- Good thermal conductivity
- Good electrical conductivity
- Small overall dimensions
- Easy mounting
- Wide selection of standard items
- Special items on demand

TECHNICAL DATA

Maximum load factor -Dry	Alternativ load	PV	25.000 psi-fpm	0,9 N/mm²·m/s
	Continuous load	PV	50.000 psi-fpm	1,8 N/mm²·m/s
	Short-term limit	PV	100.000 psi-fpm	3,6 N/mm²·m/s
Maximum Specific Load	Static	P	35500 psi	250 N/mm²
	Reduced movements	P	20000 psi	140 N/mm²
	Rotary and swinging	P	8750 psi	60 N/mm²
Maximum Speed	Dry	v	1000 fpm	2,5 m/s
	Hydrodynamic state	v	2000 fpm	< 10 m/s
Service Temperature	Minimum	t	-328°F	*-200°C*
	Maximum	t	+536°F	*+280°C*
Coefficient of Friction-Dry	Minimum	μ	0,03	
	Maximum	μ	0,20	