


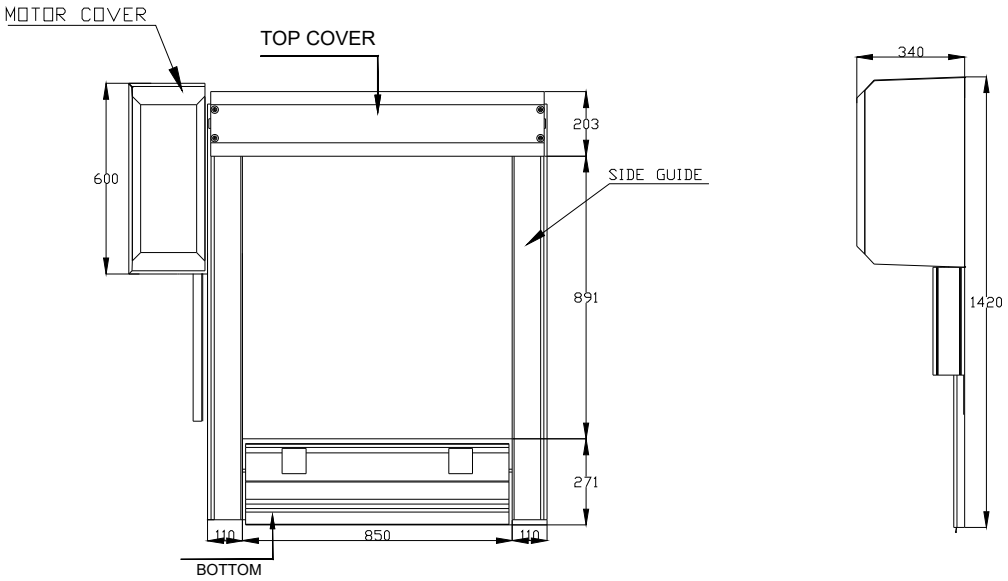

TECHNICAL SPECIFICATION :

DATE

SR.	SPECIFICATIONS	DETAILS
1	USE	INTERNAL DOOR
2	SIDE FRAMES	ALUMINUM ANODIZED TWO PARTS, TO HAVE EASY ACCESS TO SWITCHES & SERVICE.
3	DOOR BLADE	PVC MATERIAL TRANSPARENT WITH REINFORCEMENT STRIPES .
4	BOTTOM BEAM	ALUMINUM,ANODIZED
5	DRIVE UNIT	DRIVE UNIT IP55,EITHER RH OR LH AS AN OPTION , WITH CONTROL CABLE.
6	ACCESSORIES	TOP COVER & MOTOR COVER
7	CONTROL SYSTEM	MCC FREQUENCY CONVERTER VECTOR CONTROL FOR OPENING /CLOSING SPEED UP TO 2.4/ 1.4 M/S FOR DOOR WITH SAFETY CONTACT EDGE, PROTECTION IP55.WITHOUT DISPLAY,INTERFACE CARD DELIVERED SEPARATELY , INCLUDING POWER & INTERFACE CABLE ,WITH MAIN SWITCH IN SEPARATE BOX.
8	RAL CODE	CONFIRM BY CLIENT

R01 - MOTOR MOUNTING POSITION CHANGE

SR.NO	CLEAR WIDTH (MM)	CLEAR HEIGHT (MM)	QTY
1	850	950	2

NOTE :

1.ALL DIMENSION ARE IN MM

SPECIAL INSTRUCTION'S :

TITLE - DOOR AUTOMATION

DWG NO - NTPL- 320

NIHVA Technologies Pvt. Ltd.

NIHVA TECHNOLOGIES PVT.LTD.PUNE
Website - www.nihva.com

	NAME	SIGNATURE	DATE
DRAWN	B.S.		10-02-2026
CHK'D	V.T.		10-02-2026
APPV'D	V.T.		10-02-2026

IF ANY QUERIES CONTACT - Design@nihva.com

ALL DIMENSIONS ARE IN 'MM'

A2

PRODUCT - MACHINE PROTECTION DOOR

PROJECT NO - NTPL- 320

REVISION - 01

SITE LOCATION -

WEIGHT -

MATERIAL - AL

QTY - 2 NOS

PROJECTION METHOD

SCALE :

SHEET 1 OF 1