Pioneering for You

NIHVA
NIHVA Technologies Pvt. Ltd.

wilo

The intelligent system solution

End Suction Pumps

As per EN 733



End Suction Pumps

As per EN 733



End Suction Pumps	:	39 Models
Series	:	NL pumps
Nominal Sizes	:	DN 32 mm up to DN 150 mm
Flow Range	:	up to 600 m3/hr
Head Range	:	up to 150 m
Operating Pressure	:	16 bar
Operating Temperature	:	–20˚C to +120˚C, Mechanical Seal
Mounting	:	Horizontal
Lubrication	:	Grease
Direction of Rotation	:	Clockwise

Applications

- Water Supply, HVAC, Irrigation, Municipal Water Supply, Building services & General Industry

Features

- Back pull out design eases for maintenance of the pump without disturbing the motor & piping arrangement
- Greased for life Deep Groove ball bearings
- Reduced shaft deflection with compliance to ISO 5199 thereby extends the life of seal & bearings
- Bearing brackets are equipped with connections for SPM vibration and temperature sensors
- Special sealing rings, closed at standstill (prevent water ingress into bearings during cleaning operations), open when running (reducing friction)
- Flange drilling as per DIN 2533

Material Of Construction

Casing	:	Cast Iron
Impeller	:	Cast Iron, Bronze
Shaft	:	Stainless Steel [SS 420]
Shaft Sleeve	:	Stainless Steel [SS 420]


Product Variants


With Gland Pack sealing
With Mechanical Seal

Optional Execution

Pressure boosting system with speed control and 2 to 6 non self–priming, NL pumps switched in parallel

Selection Chart

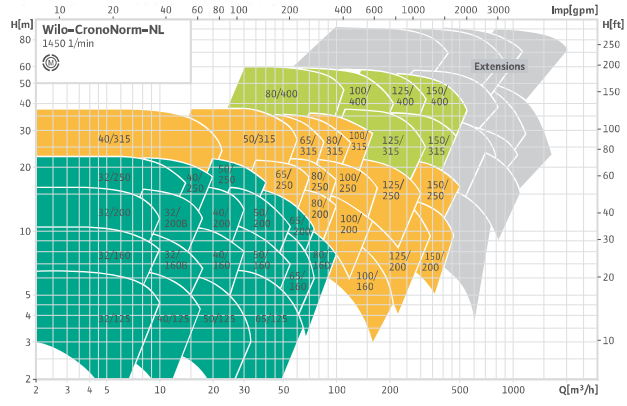

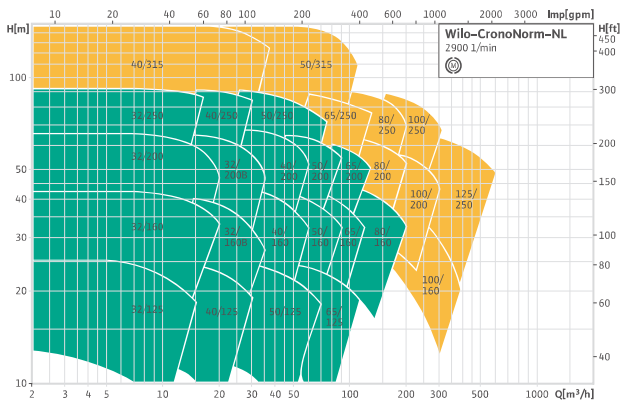

WILO Mather and Platt Pumps Pvt. Ltd.
1st Floor, "One Elpro Park",
Elpro Compound, CTS No.4270,
Chinchwad, Pune – 411033.
Maharashtra (India)

T +91 20 67347100
Service Toll Free: 1800 266 8866

www.wilo.in
sales.in@wilo.com

www.facebook.com/WiloIndia

Tech. matter subject to change without prior notice