



ELEVATION

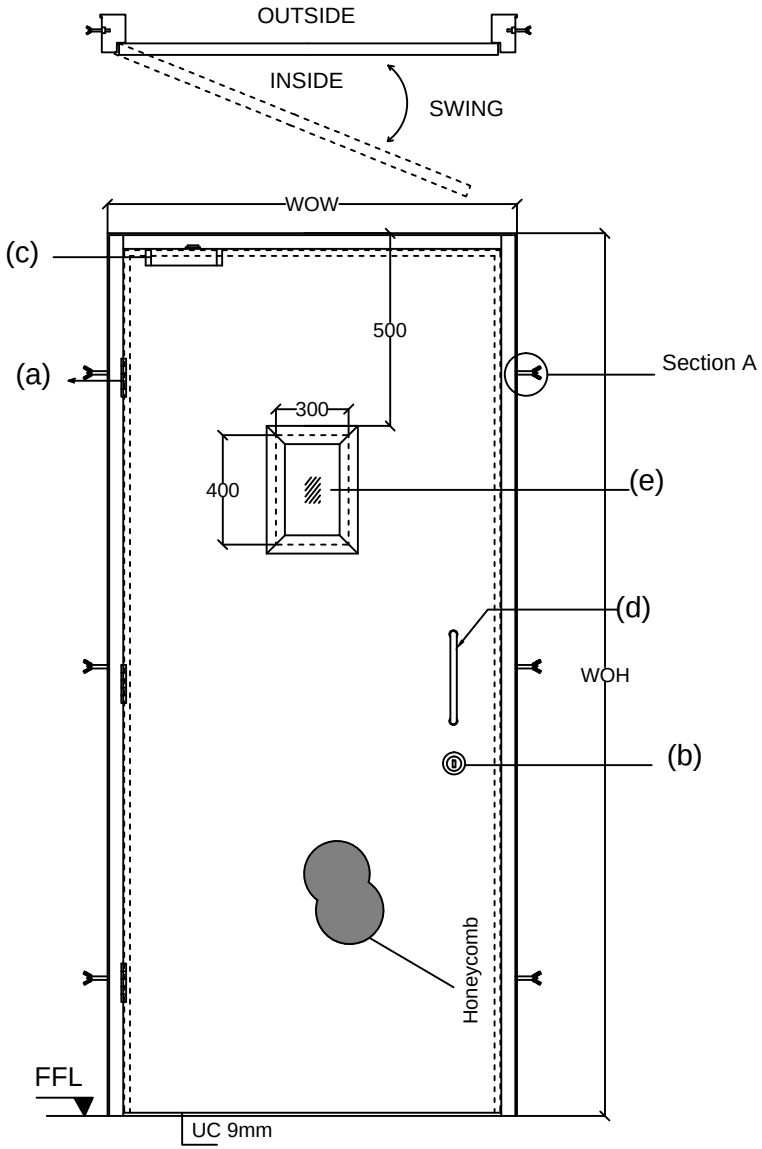

TOP VIEW

Abbrevation's:
WOW-Wall Opening Width
WOH-Wall Opening Height
UC-Under Cut
FFL-Finished Floor Level

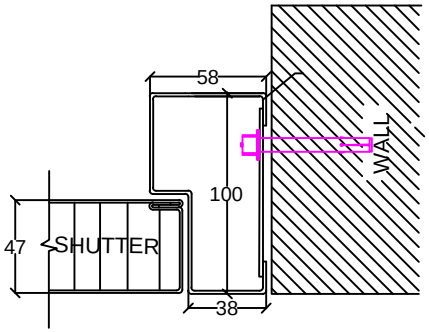

Section A

ASSESORIES DETALES

(a) HINGES: SS Ball bearing butt hinges size 4"x3'x3mm

(b) LOCK : Mortise Dead lock with cylinder

(c) DOOR CLOSER: 1 No. Door Closer F8500

(d) HANDLE : SS D HANDLE(254mm) (Pair)

(e) VISION PANEL : VISION PANEL SIZE of 300mmx400mm

Shutter thickness : 47 mm
Frame Sheet thick : 1.20mm
Shutter sheet thick : 0.80mm
Fixing : On Soliid Brick plasterd wall with Anchors

NOTE:- *All Dimensions are in mm.
*Tolerance:-All Linear Dimensions ±3mm,Others ±0.5mm.
*The Drawing Is For Location of Hardware only. Drawing Does Not Represent The Hardware For More Clarity, Please Go Through Hardware Broucher.

Steel door size

WOW	WOH	QUANTITY
1000	2050	1

ORIENTATION- TYPE 1 LEFT HAND

COLOR:- Sapphire Blue(RAL 5003)

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not be sold or copy to any other concern.

FIRE RATED STEEL DOOR

CLIENT APPROVAL

ALL DIMENSION ARE IN mm

	NAME	DATE	SIGN.
DRAWN	OMKAR	06/06/16	
CHECK	ANIL	06/06/16	
REV.	01		
APPRD.			
MFG			

NIHVA TECHNOLOGIES PVT. LTD.

NIHVA TECHNOLOGY PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:-www.nihva.com

CLIENT - MARS INTERNATIONAL
PROJECT -
SITE -
DWG. NO. - NIHVA/16-17/0013
SCALE: 01 | WT: | SHEET: 01 OF 01
If any queries contact : projects@nihva.com