NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

# PROJECT PROPOSAL

## NIHVA TECHNOLOGIES PVT. LTD.

187, G-Block, Thermax chowk, Above Renault Showroom, MIDC
Chinchwad, Pune – 411019.

| | |
|---|---|
| Customer Name | **Trident Group** |
| Project Name | **Trident Group** |
| Project Location | **Budni ( Dist – Sehore ) Madhya Pradesh** & **Barnala , Punjab** |
| Contact Person Name | Mr. Shailesh Laddha |
| Email Id | ShaileshLaddha@tridentindia.com |
| Contact Number | +91-8349801046 |

Contact Person: Ms. Varsha
Mob No.: 8551091333
Email id: support@nihva.com
Web: http://www.nihva.com

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

Dear Sir,

Thank you for your enquiry. Please find below our offer for our NIHVA make Telescopic Belt Conveyor.

100% design and manufactured by NIHVA at PUNE.

We trust that this will meet with your approval and if you have any queries please do not hesitate to contact us.




# Technical Details of Telescopic Conveyor

| | |
|---|---|
| **Overall Dimensions** | |
| Overall closed length | 6000mm standard |
| Total extended length | 19000mm standard |
| Cantilevered length | 13000mm standard |
| **General Specification** | |
| Height to top of belt | 850mm minimum |
| Belt width | 600mm nom. |
| Belt type | Smooth face PVC top, 2 ply |
| Belt joint | Vulcanized joint |
| Belt drive | Geared motor unit |
| Telescopic drive | Synchronized positive chain drive |
| **Loading Capacity** | |
| Per metre | 40kg/metre |
| **Control & Operation** | |
| Main supply | 415v, 3ph rated at 20amps (per conveyor) 50hz |
| Main supply connection | Isolated supply to be provided by the customer to control panel |
| Control voltage | 24v dc |

| | |
|---|---|
| Emergency stops | 1-off front boom |
| Belt speed | 30m/min. Inverter controlled |
| Belt direction | Reverse (unloading) |
| Belt controls | Start / stop push-buttons |
| Extend/Retract speed | 0.25m/sec |
| Extend control | Push button on front boom |
| Retract control | Push button on front boom |
| Up/Down movement | N/a |
| Traverse movement | Control station and handle |

**General Information**

| | |
|---|---|
| Type of front boom | Impact plate |
| Mounting type | Mobile powered chassis |
| Color specification | RAL Customer to confirm |




**Included in Specification**

| | |
|---|---|
| Boom end lights | LED light units mounted in the front boom providing illumination in the vehicle, the lights automatically switch on when boom extends and switch off when the booms are fully retracted. |
| Audible warning | Audible warning to alert operator of impending belt starts. |
| Impact strip | Anti-collision strip fitted at the front of the boom which causes the machine to retract should it encounter an obstacle at the front of the machine. |
| Impact plate | 5mm thick impact plate fitted to the front of the machine to take impact from product being dropped onto the machine. |
| Inverter on belt drive | Progressive acceleration of belt up to running speed and controlled stop used when the belt will be subject to regular start / stop operation. |
| Chain sensors | Sensors positioned in main casing to detect if boom drive chains slacken due to a fault. When active, sensors stop the machine preventing further damage. |
| Underside covers | Painted sheet steel covers fitted to all telescopic sections to prevent operators from touching internal moving parts of the machine. |

**Additional Items**

| | |
|---|---|
| Mobile powered chassis | Heavy duty chassis fitted to machine enabling machine to be moved. This is facilitated by two motors and a control handle. The chassis is fully counterbalanced so no extra support is required. Ideal for traversing between doors and storing out of the way. |
| Rear pop-out roller | Interlocked roller fitted to rear. When sensor activated, belt stops preventing injury. Front pop-out roller is included as standard. |

Additional Items to Standard Specification

| Mechanical Description | Qty |
|---|---|
| Low level rear stands top pivot, pair | 1 |
| Hydraulic rams+ power pack low level | 1 |
| Powered mobile counterbalanced chassis (Tiller type) | 1 |
| **Electrical Description** | **Qty** |
| Belt inverter 1.5kw | 1 |
| P.E.C. Parcel Counter / index PEC, includes cover | |
| Reversible Belt | 1 |
| Rear pop out roller, inc sensors | 1 |
| Cable Reeling Drum (15m) | 1 |

## System Operating Parameters

For the purpose of this proposal it is assumed that the system is in use 8 hrs per day, 40 hrs per week, 52 weeks per year.

Environmental conditions are dry, with no adverse fluctuations in temperature or humidity generally between 0 and +35 deg C.



NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

# Commercial offer: -

| Sr. No. | Description | Qty | Rate In INR | Net Amount INR |
|---|---|---|---|---|
| 1 | Conveyor Type: Telescopic (Movable)<br>Total Length: 18000 mm<br>Fixed Length: 11000 mm<br>Telescopic: 7000 mm<br>Belt width: 600 mm<br>Capacity: 40 kg / Meter | 1 | 2,885,000 | 2,885,000 |
| 2 | Conveyor Type: Telescopic (Movable)<br>Total Length: 16500 mm<br>Fixed Length: 9000 mm<br>Telescopic: 7500 mm<br>Belt width: 600 mm<br>Capacity: 40 kg / Meter | 3 | 2,475,000 | 7,425,000 |

**Terms and Conditions: -**

**Price** : Ex. Works Pune

**P & F** : 3 % Extra at the time of delivery.

**Freight Notes** : Extra as applicable.

**Delivery** : Within 10- 12 weeks from date of receipt of confirmed purchase order, advance payment, drawing approval.

**Payment Terms** : 80% advance along with confirmed purchase order balance before dispatch.

**Insurance** : Extra as applicable.

**GST** : As Applicable on total supply value.

**Validity** : 15 days from date of quotation.

**Warranty** : 12 months from date of supply.


Technical Specifications:

Cost efficiencies.

Belt drive system

The belt drive system is energy and therefore cost efficient for the following reasons:

- Drive drum is lagged with a 15mm thick diamond pattern rubber coating
- Belt is driven on the top surface of belt to give maximum drive efficiency as opposed to driving on the underside which has a low coefficient of friction. This means that we do not require as much tension on the belt which in turn reduces the amount of power required from the motor to drive the belt.

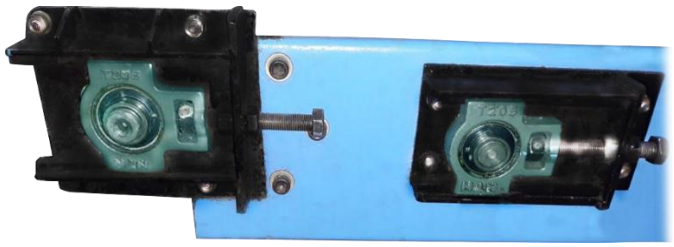

Belt Tensioning system

**Reduced cost of ownership**

Furthermore, all drive parts are easily accessible through side and rear covers so for service purposes there is easy access.

Because of this easy accessibility the maintenance per year can be reduced significantly. Also, the repairs that are needed can be done easier and quicker.



**Motors used in the conveyors**

SEW Efficient motors are a standard component in the vehicle loaders. NIHVA uses SEW motors as SEW is taking the lead in the race to reduce carbon emissions by supplying IE2 motors as its standard solution now.

**LED Lights**


LED lights are an energy efficient way of illuminating the workspace inside vehicles. LED lights are positioned in various places to ensure maximum light output is achieved, which do not dazzle the operators. 600mm long strip LED lights are fitted in the front and down the side of the front boom, the light emits a fan shaped light.





**Control panel**

Therefore, we have designed a special control panel for each operation both side front side as well back side.

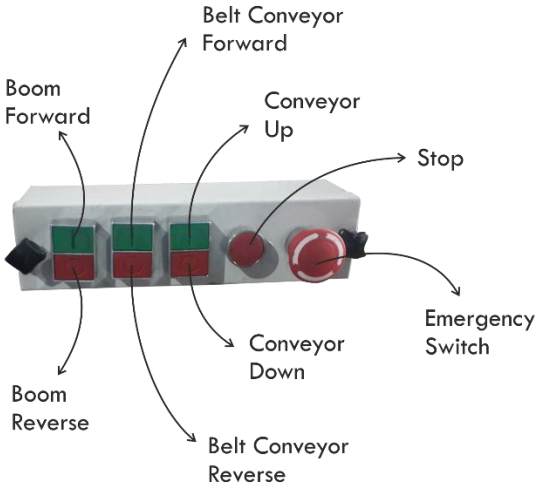





## Safety & Ergonomic features

### Front boom section

conveyors have front end sections that are very safe and ergonomically designed. They are mounted standard with the following.

- Deep section to cope with the daily arduous task of impact loading.
- Push buttons ergonomically positioned at 45 degrees to allow the operator to clearly see which button is being pressed
- Pop-out roller is electrically switched on outfeed application for added safety for the operator.
- All push buttons are protected by a 5mm thick steel cover plate

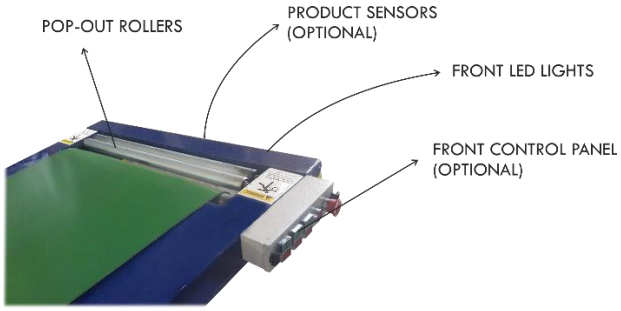


Please feel free to contact **Mr. Vijay Tarak - 08551093333** For any further Clarification /Information in this concern