
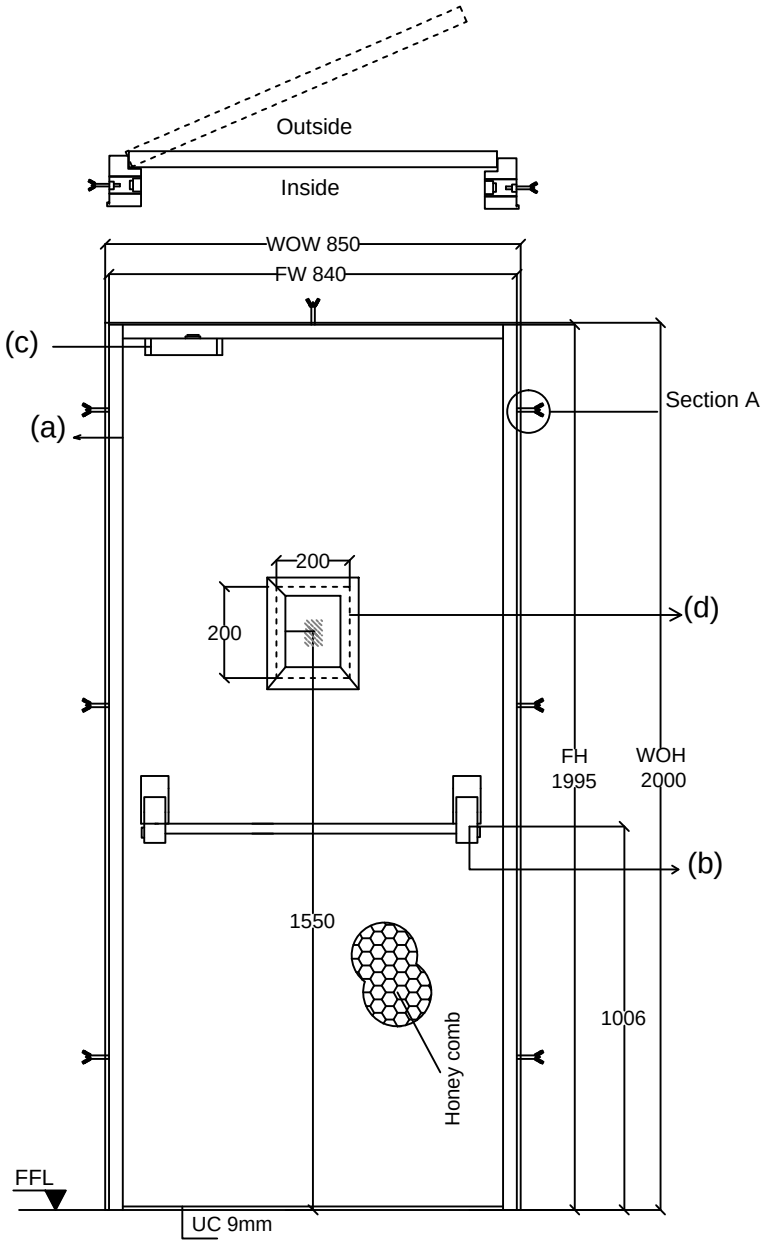


Inside Elevation



Top View

Abbreviation's:
WOW-Wall Opening Width
WOH-Wall Opening Height
FW- Frame width
FOH- Frame height
UC-Under Cut
FFL-Finished Floor Level

ASSESORIES DETALES

(a) HINGES: SS Ball bearing butt hinges 100x75x3mm


(b) LOCK : Panic Bar
External trim
Mortise dead lock with half cylinder.

(c) DOOR CLOSER

(d) GLASS : 1No. Clear fire Vision Glass size 200x200mm.

Shutter thickness : 47 mm
Frame Sheet thick : 1.20mm
Shutter sheet thick : 0.80mm
Fixing : On Solid Brick plastered wall with Anchors

NOTE:- *All Dimensions are in mm.
***Tolerance:-All Linear Dimensions ±3mm,Others ±0.5mm.**
***The Drawing Is For Location of Hardware only. Drawing Does Not Represent The Hardware For More Clarity, Please Go Through Hardware Broucher.**

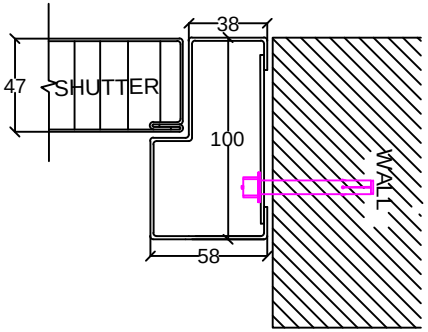

Detail view of Section A

FIRE DOOR SIZES		
WOW	WOH	QUANTITY
850	2000	5

COLOR- LIGHT GREY(RAL 7035)

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not be sold or copy to any other concern.

Fire rated Door

CLIENT APPROVAL

ALL DIMENSION ARE IN mm

	NAME	DATE	SIGN.
DRAWN	OMKAR	14/05/16	
CHECK	ANIL	14/05/16	
REV.	00		
APPRD.			
MFG			

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGY PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:-www.nihva.com

CLIENT - TATA MOTORS LTD.
PROJECT - JLR
SITE -
DWG. NO. - NIHVA/16-17/0017
SCALE: 01 | WT: | SHEET: 01 OF 01
If any queries contact : projects@nihva.com