
AIRCLOS

Aluminium Retractable roof systems
Technical data

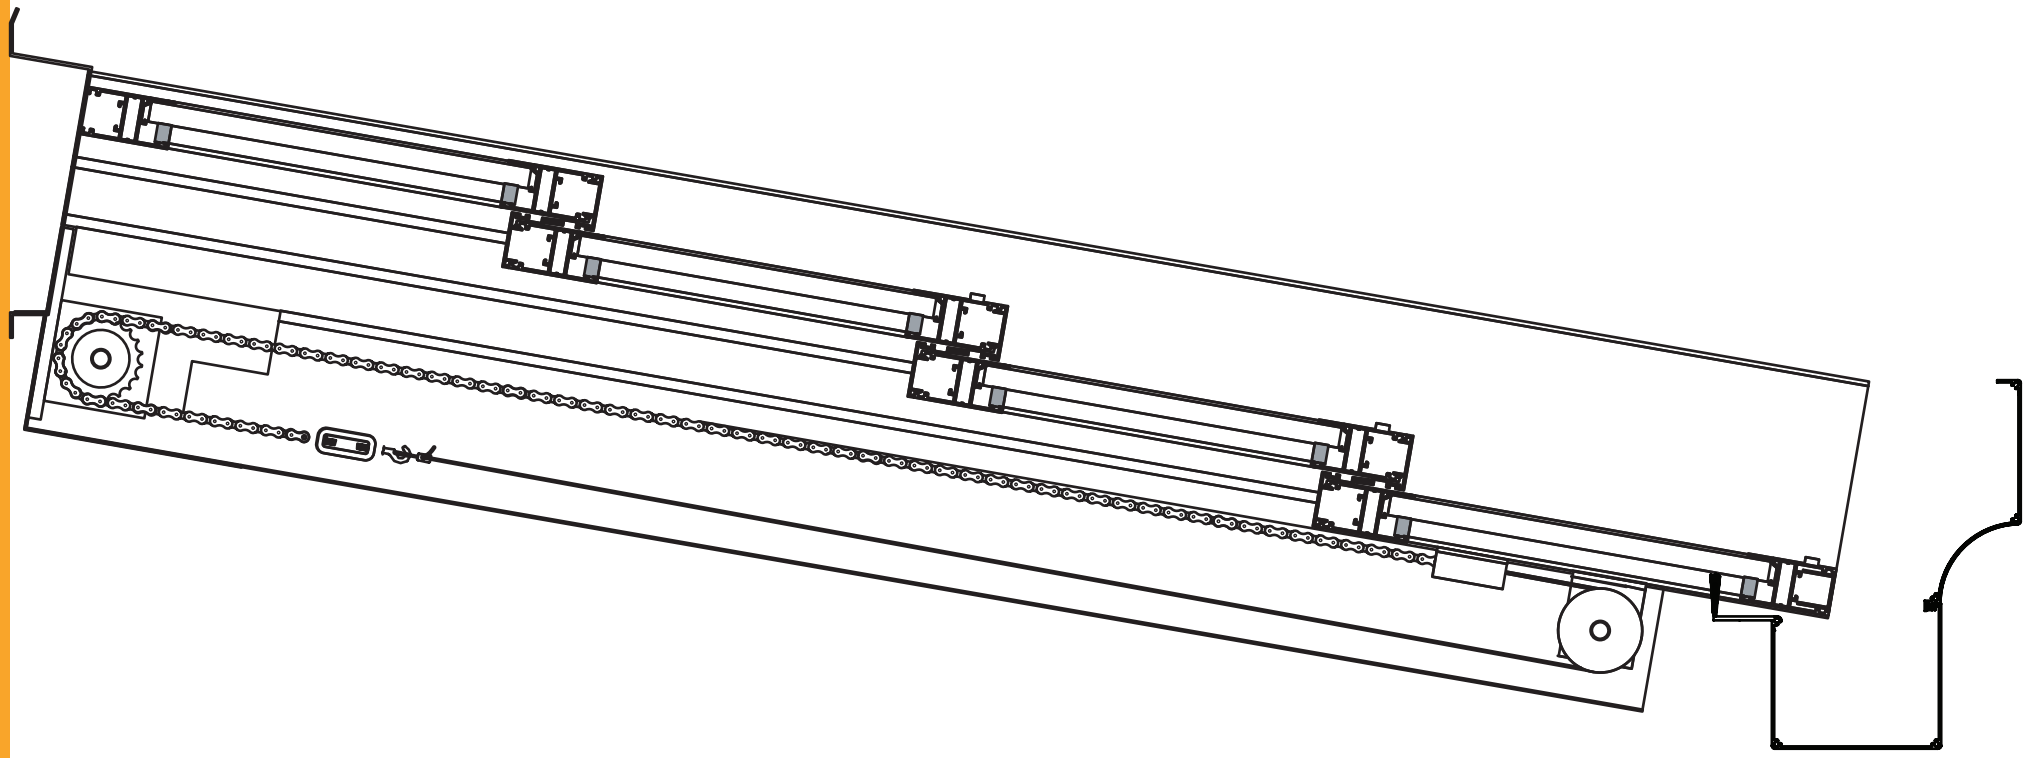

Aluminium retractable roof systems

AIRCLOS

AIRCLOS Aluminium retractable roof systems are completely proofed against wind and rain and have excellent insulation properties against atmospheric conditions providing optimum energy savings. They are also very light thanks to the design of the panels.

AIRCLOS systems have many applications and can be used to allow greater use of swimming pools, pergolas, winter gardens, porches, solariums, attics and terraces in both houses and commercial premises.

Our movable systems can provide variable ventilation for the covered space. They move automatically and can use panels of different types: These can be transparent, translucent or opaque for different levels of illumination and to create different ambiences in the space.

They are easy to install and do not require building works. They can be installed with drains and water collectors.

Aluminium roof systems. Series:

Retractable roofs

- T5000 3 track guide, 3 Panels
- T5000 3 track guide, 4 Panels
- T5000 4 track guide, 4 Panels
- T5000 4 track guide, 5 Panels

T5000 3 Panel 3 Track guide

AIRCLOS

AIRCLOS sliding motorised roof system consisting of 3 or 4 glazing panels; the roof can be opened to two thirds of its total width as the topmost panel is fixed and cannot be moved.

The system is supplied with fully mounted panels, guides with fastening supports, and a ready-mounted motor. The assembly profiles are supplied cut to size and ready to install. An assembly diagram is also provided.


Glazing panels are available in 16 mm cellular polycarbonate, 16 mm sandwich panels, or double glazing. The double glazing is composed of an interior 3+3 mm pane of glass, a 15 mm air cavity, and a 4 mm pane of tempered glass onthe outside. The interior pane is also available in 4+4 mm.

The recommended slope is 10% of the roof's height. The maximum height that can be achieved using the triple track guide is 4.5 metres.

The profiles come with a wood-grain effect, a lacquered finish (RAL colour range), or an anodised finish. The polycarbonate glazing panels can be transparent, white, or bronze, the sandwich panels white or lacquered in a tone similar to RAL 1015, and the glass transparent or matt.


Side view

Dimensions en mm

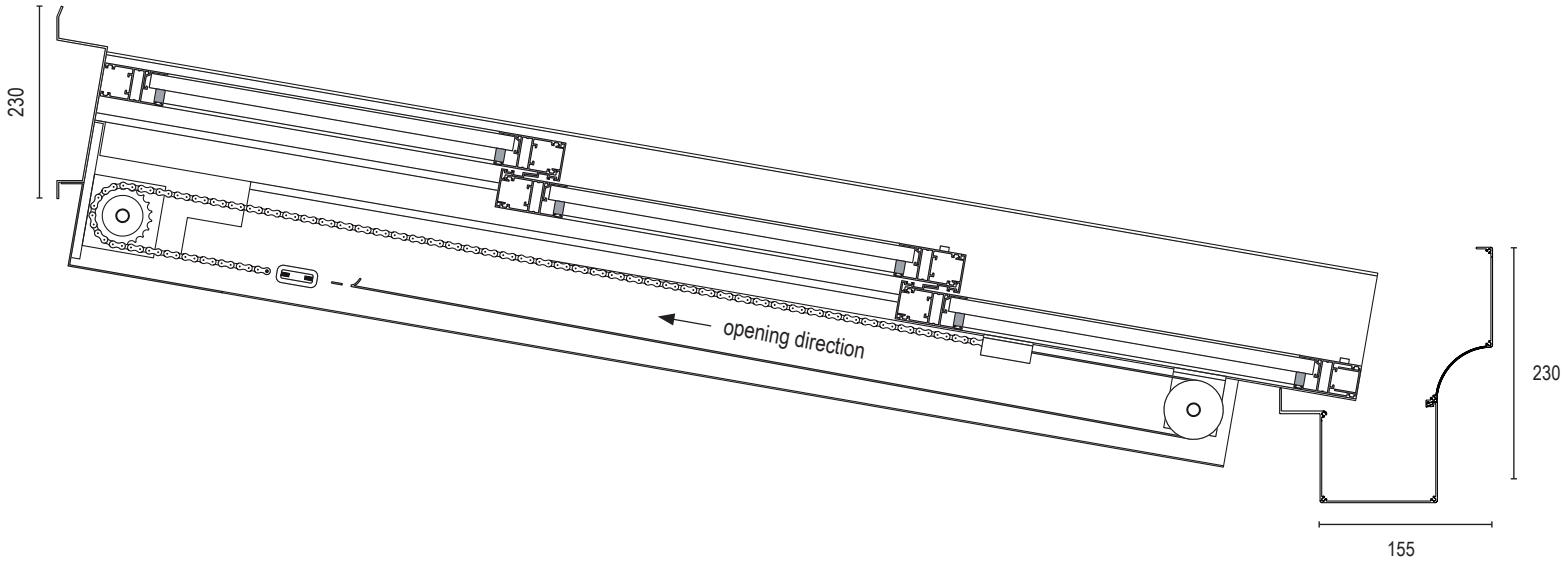


Front view

Dimensions en mm

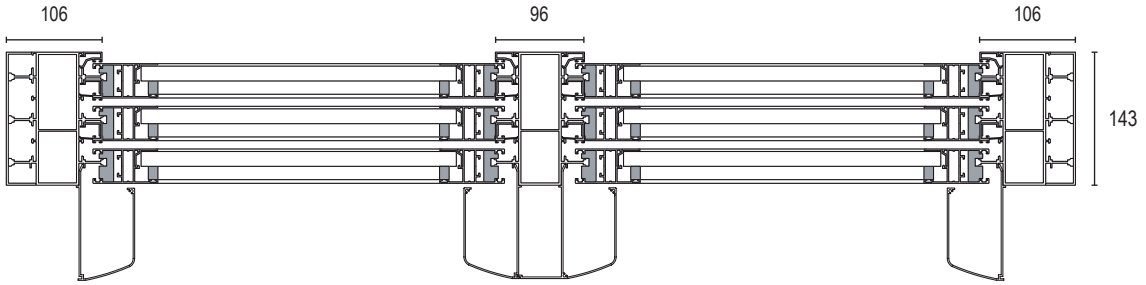

Chain guard for LED illumination



Chain guard for awning placement

T5000 4 Panel 3 Track guide

AIRCLOS

AIRCLOS sliding motorised roof system consisting of 3 or 4 glazing panels; the roof can be opened to three quarters of its total width as the topmost panel is fixed and cannot be moved.

The system is supplied with fully mounted panels, guides with fastening supports, and a ready-mounted motor. The assembly profiles are supplied cut to size and ready to install. An assembly diagram is also provided.


Glazing panels are available in 16 mm cellular polycarbonate, 16 mm sandwich panels, or double glazing. The double glazing is composed of an interior 3+3 mm pane of glass, a 15 mm air cavity, and a 4 mm pane of tempered glass onthe outside. The interior pane is also available in 4+4 mm.

The recommended slope is 10% of the roof's height. The maximum height that can be achieved using the triple track guide is 4.5 metres.

The profiles come with a wood-grain effect, a lacquered finish (RAL colour range), or an anodised finish. The polycarbonate glazing panels can be transparent, white, or bronze, the sandwich panels white or lacquered in a tone similar to RAL 1015, and the glass transparent or matt.


Side view

Dimensions en mm

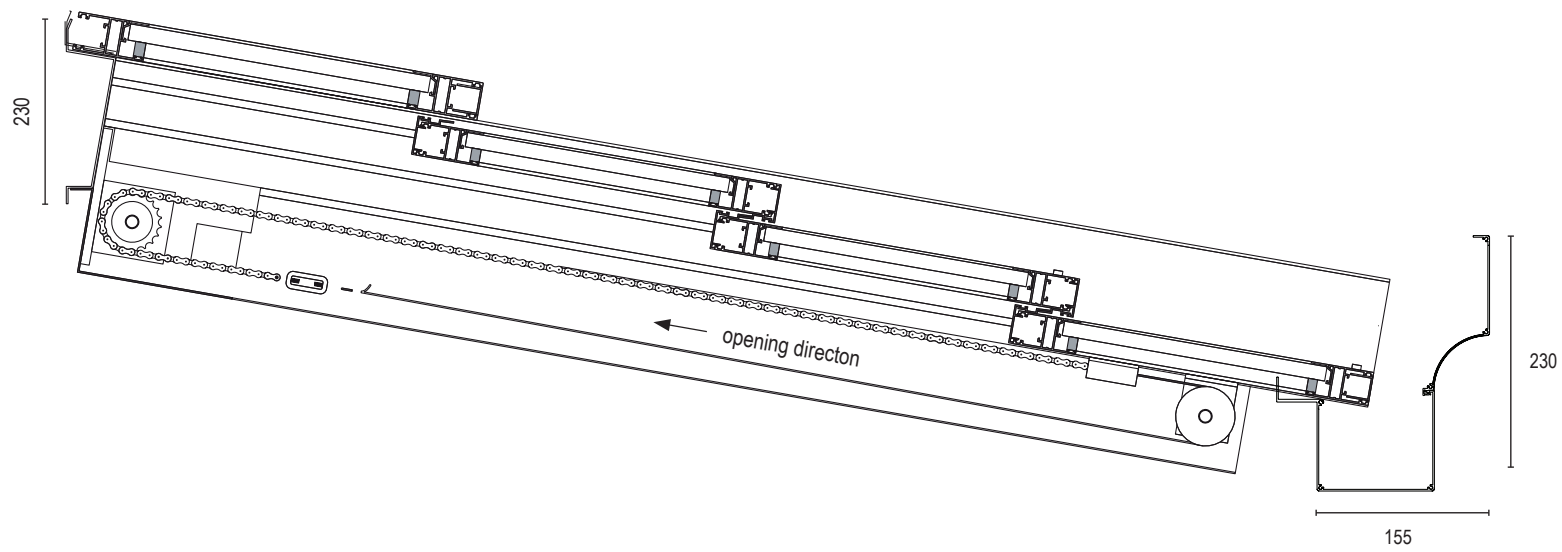


Front view

Dimensions en mm

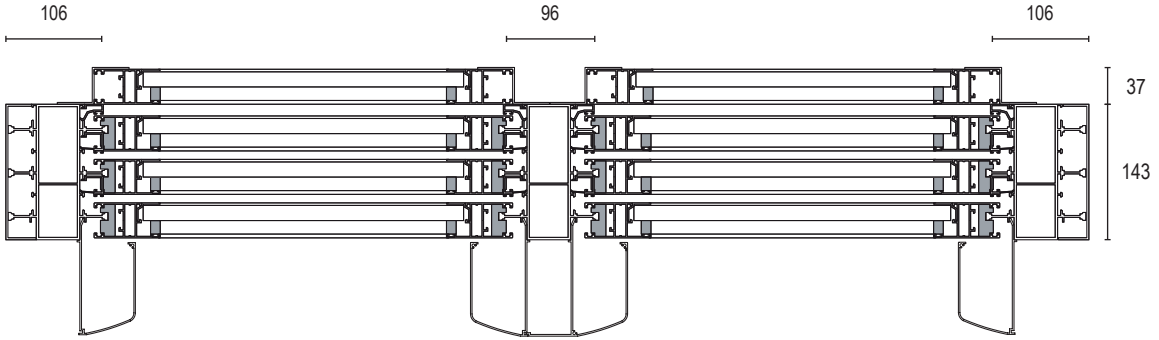


Chain guard for
LED illumination



Chain guard for
awning placement

T5000 3 Track guide

AIRCLOS

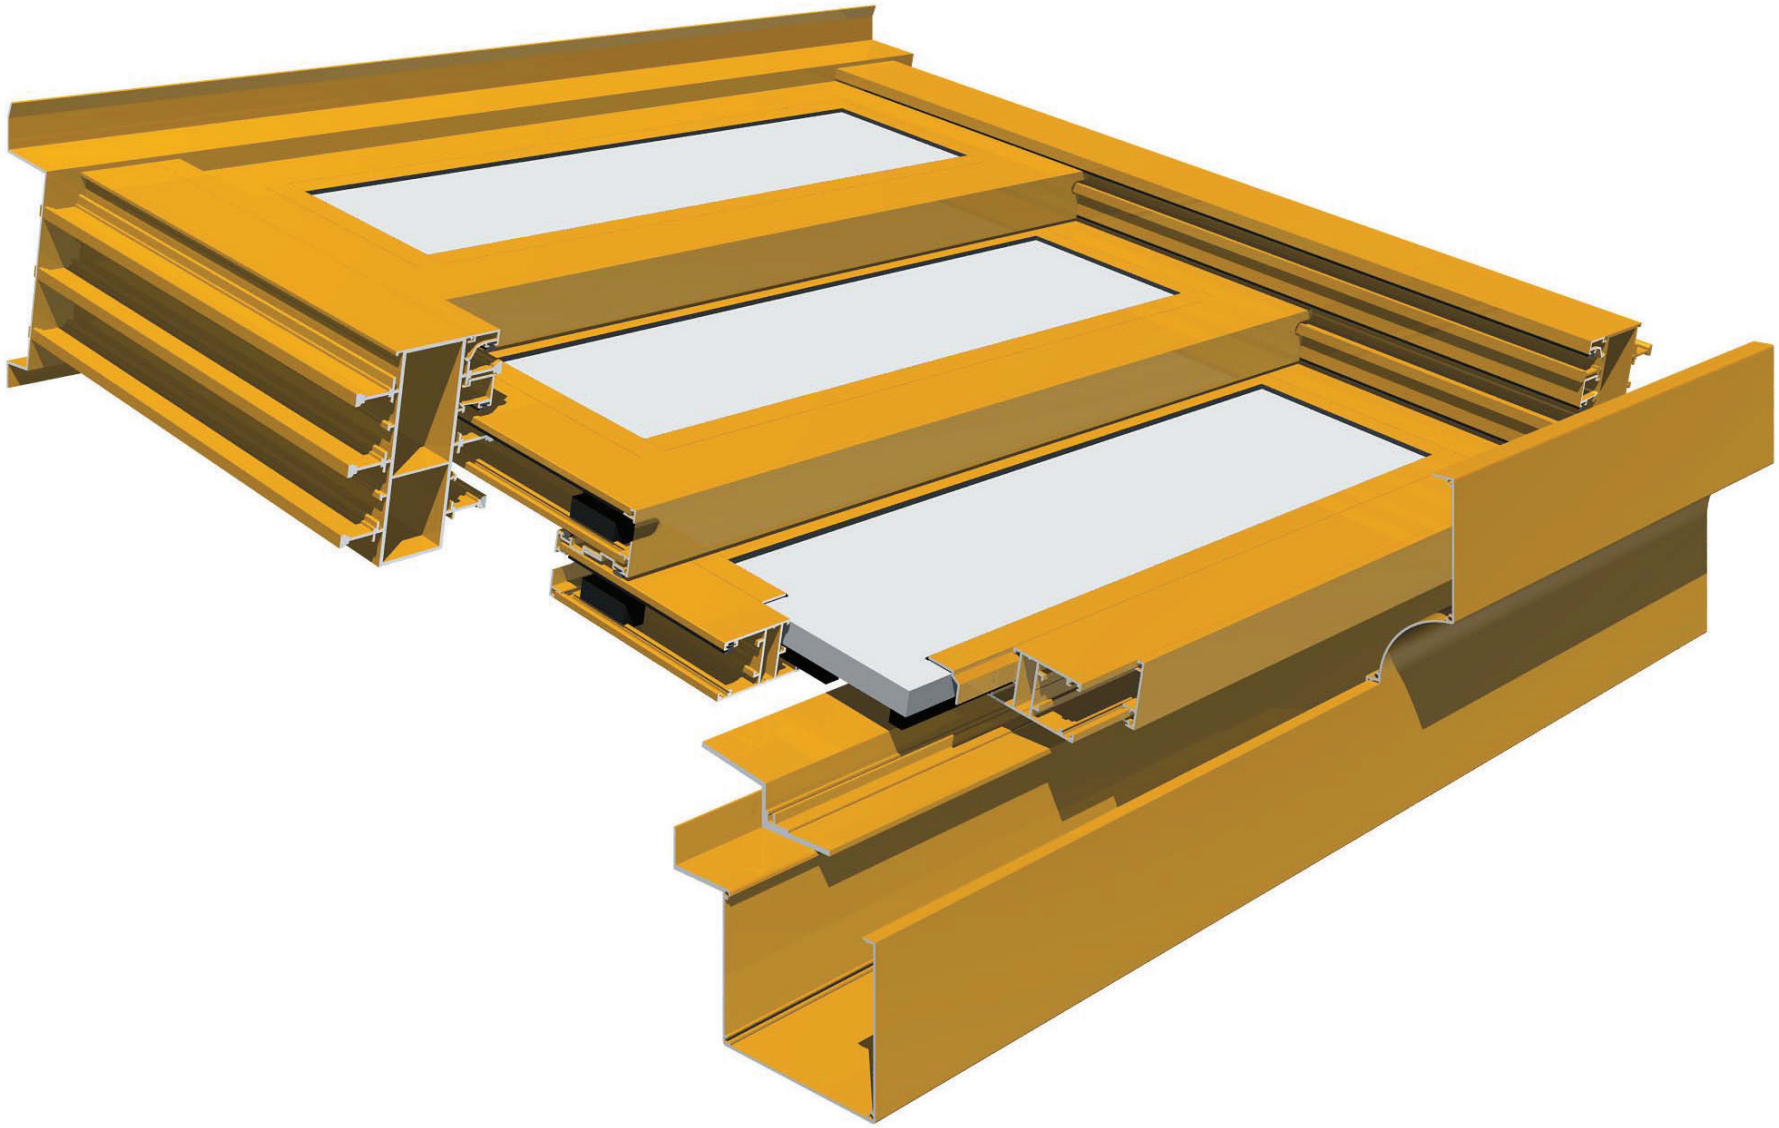

T5000 4 Panel 4 Track guide

AIRCLOS

AIRCLOS sliding motorised roof system consisting of 4 or 5 glazing panels; the roof can be opened to three quarters of its total width as the topmost panel is fixed and cannot be moved.

The system is supplied with fully mounted panels, guides with fastening supports, and a ready-mounted motor. The assembly profiles are supplied cut to size and ready to install. An assembly diagram is also provided.


Glazing panels are available in 16 mm cellular polycarbonate, 16 mm sandwich panels, or double glazing. The double glazing is composed of an interior 3+3 mm pane of glass, a 15 mm air cavity, and a 4 mm pane of tempered glass onthe outside. The interior pane is also available in 4+4 mm.

The recommended slope is 10% of the roof's height. The maximum height that can be achieved using the triple track guide is 7 metres.

The profiles come with a wood-grain effect, a lacquered finish (RAL colour range), or an anodised finish. The polycarbonate glazing panels can be transparent, white, or bronze, the sandwich panels white or lacquered in a tone similar to RAL 1015, and the glass transparent or matt.


Side view

Dimensions en mm

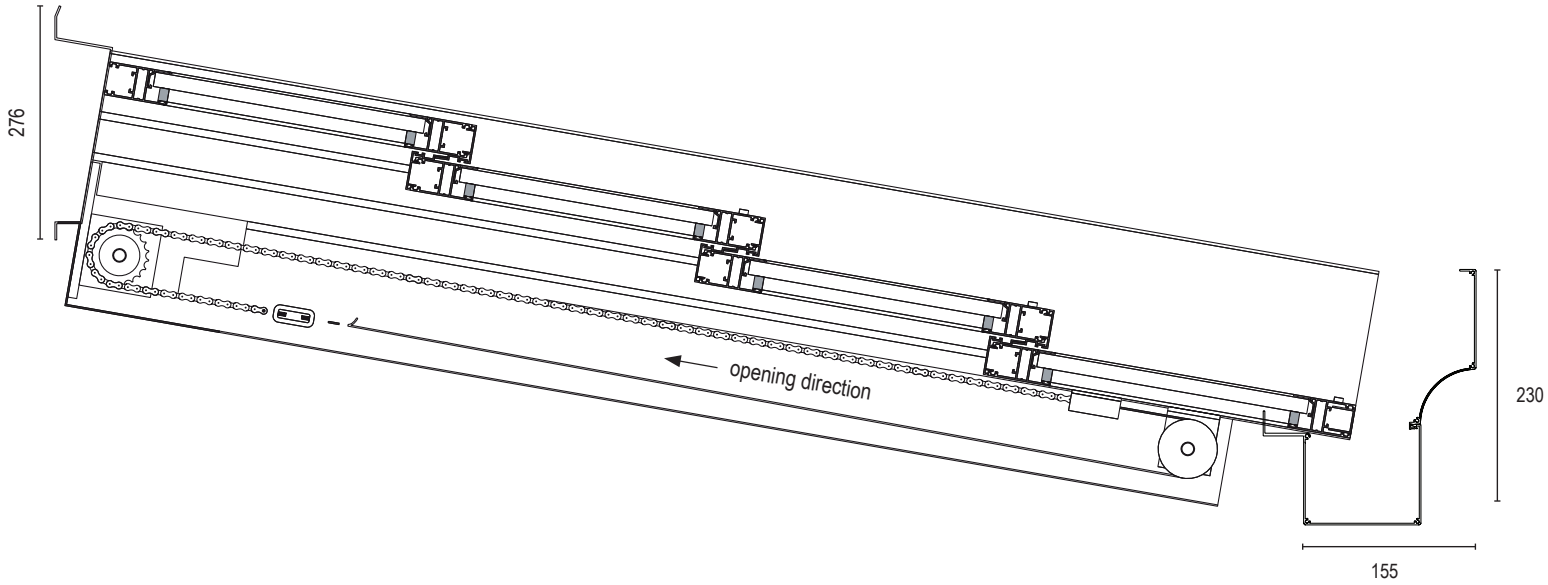


Front view

Dimensions en mm

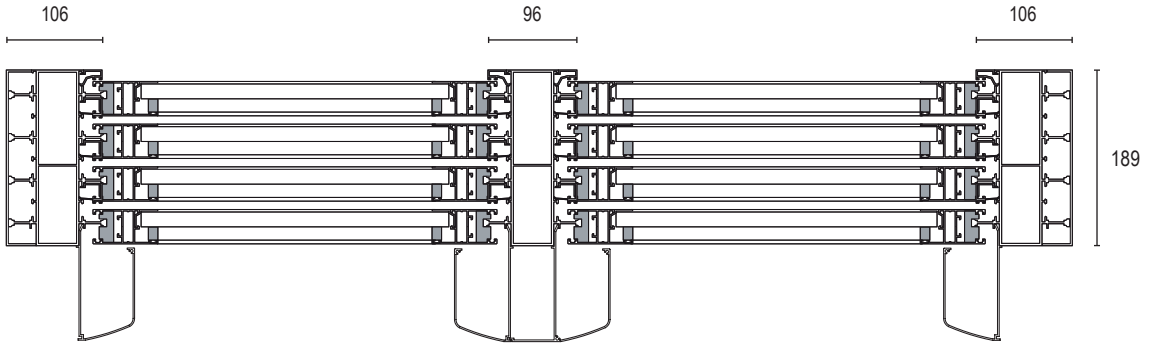

Chain guard for
LED illumination



Chain guard for
awning placement

T5000 5 Panel 4 Track guide

AIRCLOS

AIRCLOS sliding motorised roof system consisting of 4 or 5 glazing panels; the roof can be opened to four fifths of its total width as the topmost panel is fixed and cannot be moved.

The system is supplied with fully mounted panels, guides with fastening supports, and a ready-mounted motor. The assembly profiles are supplied cut to size and ready to install. An assembly diagram is also provided.


Glazing panels are available in 16 mm cellular polycarbonate, 16 mm sandwich panels, or double glazing. The double glazing is composed of an interior 3+3 mm pane of glass, a 15 mm air cavity, and a 4 mm pane of tempered glass onthe outside. The interior pane is also available in 4+4 mm.

The recommended slope is 10% of the roof's height. The maximum height that can be achieved using the triple track guide is 7 metres.

The profiles come with a wood-grain effect, a lacquered finish (RAL colour range), or an anodised finish. The polycarbonate glazing panels can be transparent, white, or bronze, the sandwich panels white or lacquered in a tone similar to RAL 1015, and the glass transparent or matt.


Side view

Dimensions en mm

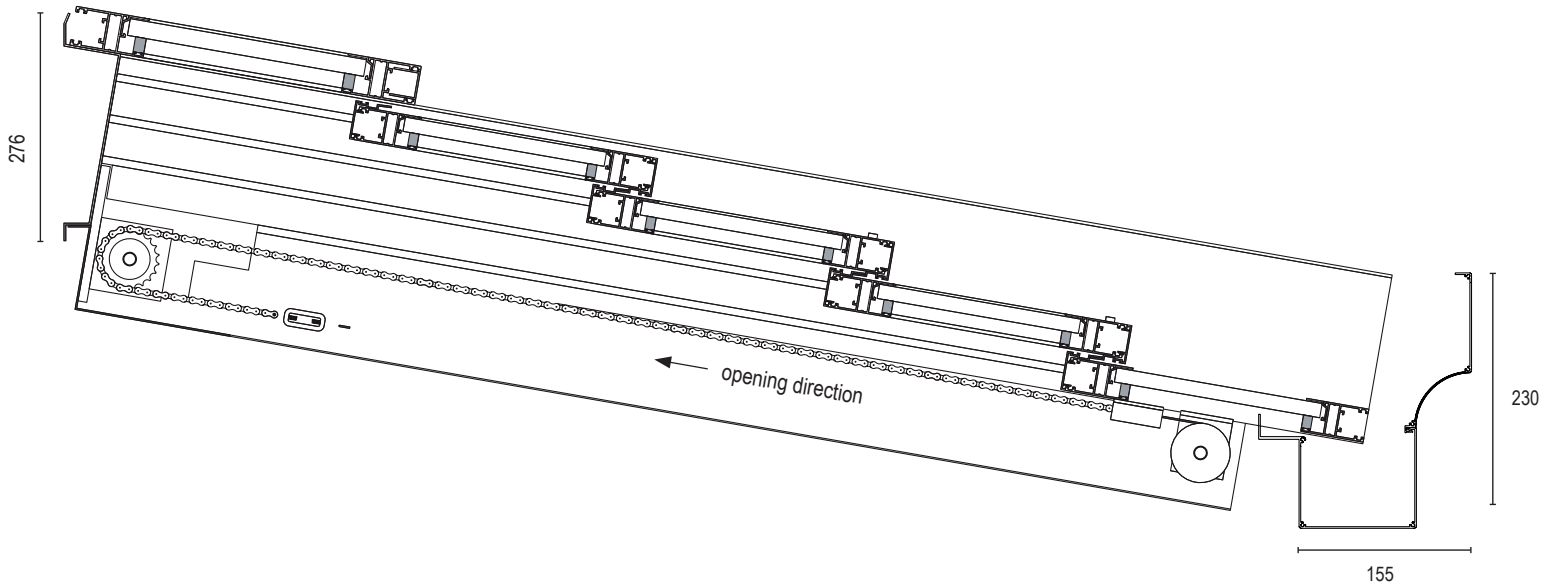


Front view

Dimensions en mm

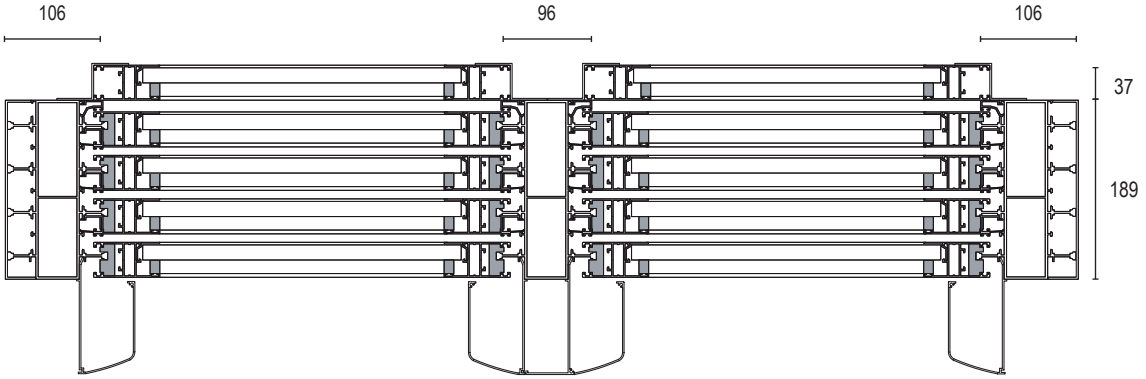


Chain guard for LED illumination



Chain guard for awning placement


T5000 4 Track guide

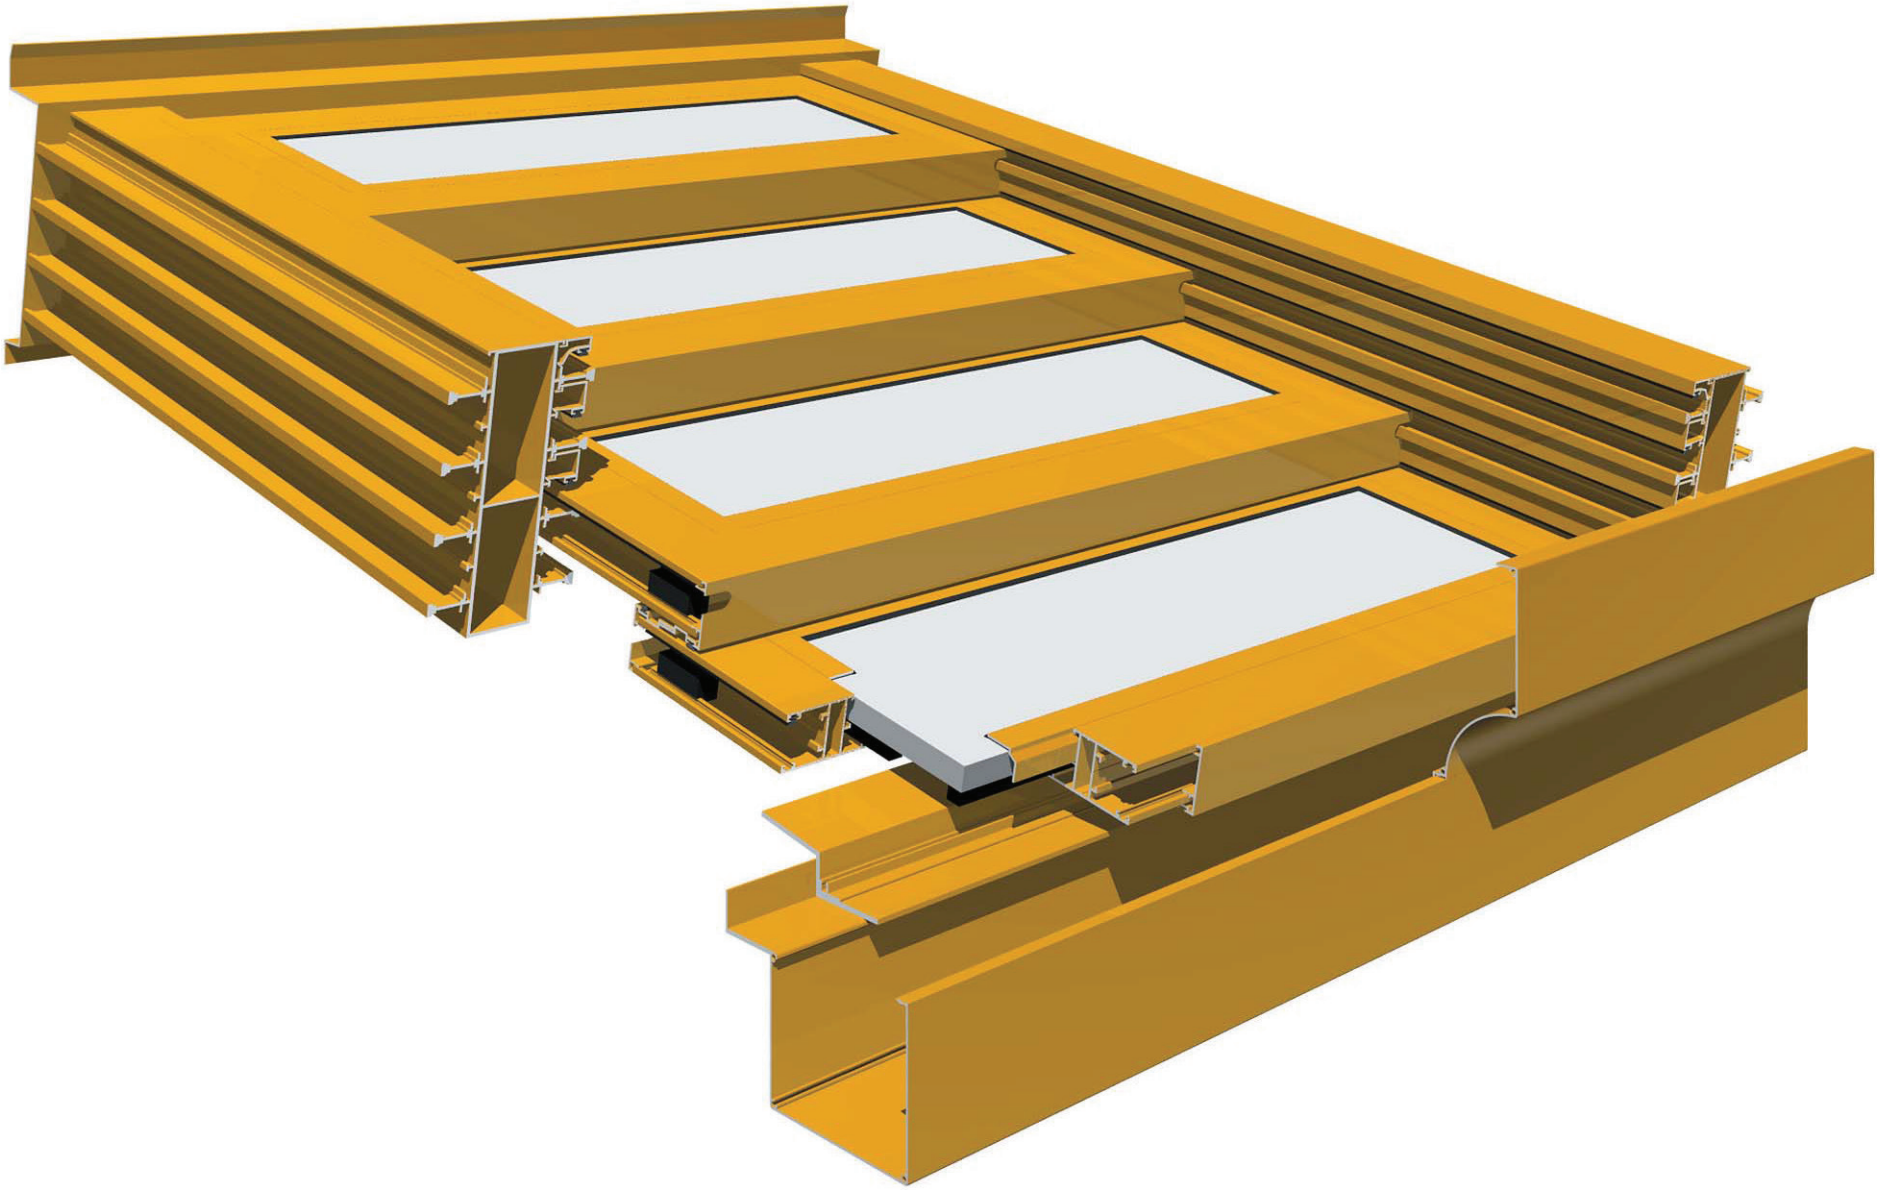

T5000: Gutter options


AIRCLOS

Gutter for steel structure

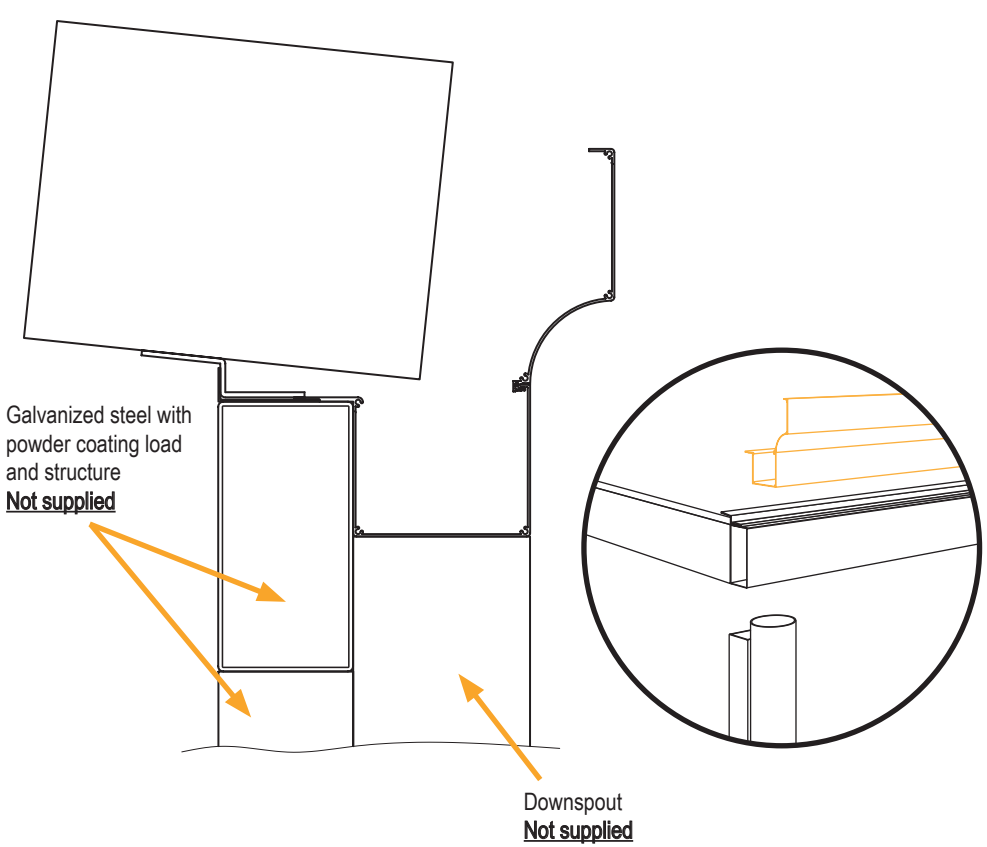

For steel structure it must be placed this gutter. These structures alows a greater strength and gaps between pillars than aluminium structure.

Gutter for aluminium structure

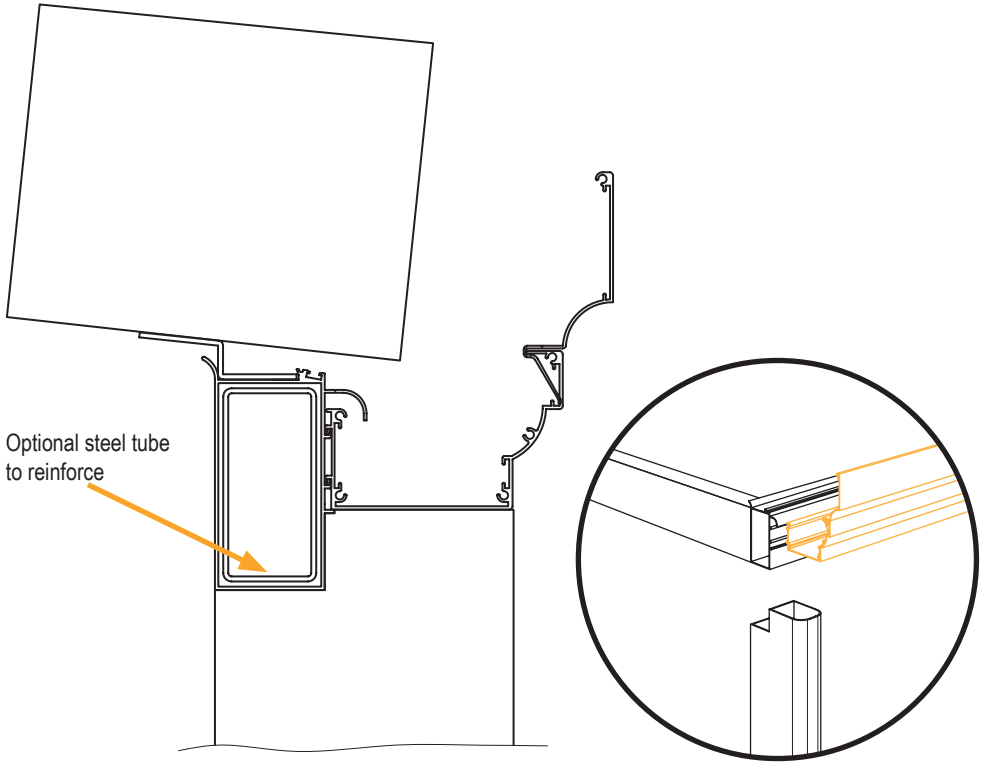

For aluminum structures the loading profile, the gutter and the downspout are supplied. The structure can be reinforced by steel tubes. Maximum width of 4000 mm between pillars.

AIRCLOS

Aluminium Retractable roof systems
Technical data

European Aluminium Systems S.L.U.
Export@airclos.com

