1.3 Applications













Since the size, shape and weight of the materials to be transported can vary over a wide range PEC Products provides you with the most suitable solution for your applications.

Our systems are the preferred solution in sectors such as : packaging, electronics, machine construction, automotive, pharma, food, ...

Using very small return sets, the PEC Products conveyors provide maximum belt width in the most narrow space.


Due to our "Customer made" program you can choose conveyors (front drive, middle drive, knife edge(s), drummotor, ...) with a width ranging from 40 up to 1600 mm. For a quick delivery you can order our standard program including following widths : W = 40, 80, 218, 318, 618, 1218 mm.

The use of an aluminium profile based structure makes these conveyors flexible and easy to mount.


2. Conveyor 40

2.1 General overview





indirect front drive



frame


knife-edge


return roller



direct front drive



frame



knife-edge



return roller


knife-edge


knife-edge


return roller


middle drive


return roller

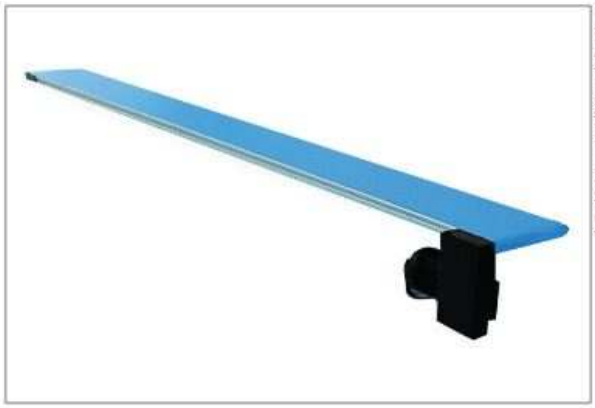
2.2 Technical data

	Type 40
Type profile :	Profile 40 x 40 light with Nut 8
Frame width (W) :	min.: 40 mm max.: 500 mm
Standard frame width (W) :	40 mm > belt width 30 mm 80 mm > belt width 70 mm 218 mm > belt width 208 mm 318 mm > belt width 308 mm 418 mm > belt width 408 mm
Center distance (L) :	min.: 400 mm max.: 6000 mm
Speed :	2 - 50 m/min
Roll diameter :	44 mm
Max. conveying weight :	200 kg (depending on conveyor dimensions)
Belt material :	- Standard conveyor belt - High duty conveyor belt - Food conveyor belt - Special
Motor :	0.06 - 0.12 - 0.18 - 0.25 - 0.55 kW
Knife edge :	max width 400mm
Side guidance :	- fixed (slide plate type B) - variable

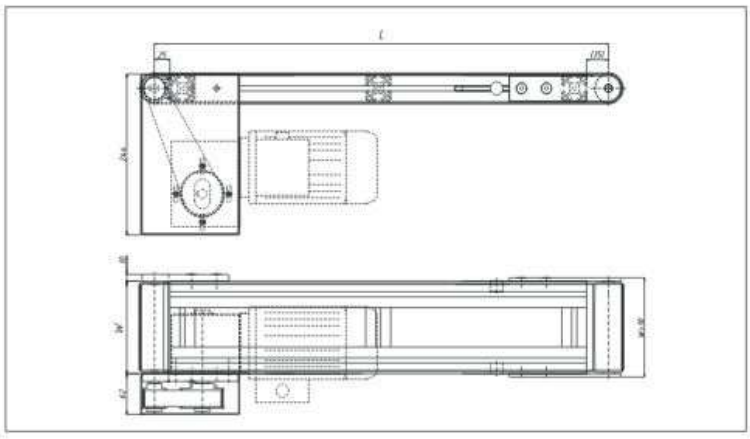


2.3 Belt Conveyor 40 with indirect Front drive

(BCF 40 i)



The conveyors 40 are ideal for light weight applications of all kinds. The small exterior dimensions ensure compact designs. The motor is installed under the belt in order to minimize the loss of belt width.



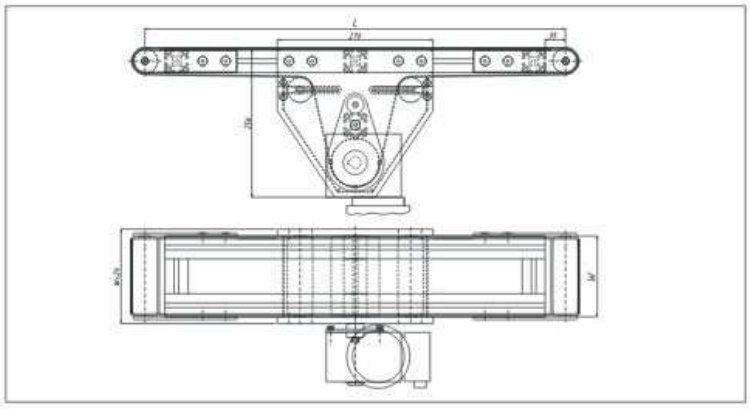
Belt Conveyor 40 with indirect Front drive

Complete conveyor system based on profile and rollers 40 with variable or standard width (W) and length (L) (Advisable L ≥ 2 x W)
(See technical data on p 7)

1 set	Slide Plate Type A/B
1 set	Conveyor Frame 40
1 set	Return Roller Set D44
2 set	Return Support Set 40
1 set	Driven Roller Set D44
1 set	Driven Support Set 40
1 set	Indirect Front Drive Motor Plate Set 40
1 pce.	Timing Belt Drive Cover 40
1 set	Motor Shaft Set
1 pce.	Worm Geared Motor
2 pce.	Timing Pulley
2 set	Timing Pulley Fastening Set
1 pce.	Timing Belt
1 pce.	Conveyor Belt

1 assembled system BCF 40 i **10-0-001**

(Please fill in questionnaire on p 36 when ordering)



Belt Conveyor 40 with Middle drive

Complete conveyor system based on profile and rollers 40 with variable or standard width (W) and length (L) (Advisable L ≥ 2 x W)
(See technical data on p 7)

1 set	Slide Plate Type A/B
1 set	Conveyor Frame 40
2 set	Return Roller Set D44
4 set	Return Support Set 40
1 set	Driven Roller Set D84
2 set	Auxiliary Roller Set D44
1 set	Middle Drive Plate Set 40
1 set	Torque Arm Set
1 set	Hollow Shaft Set
1 pce.	Worm Geared Motor
1 pce.	Conveyor Belt